NEKO
THINK DESIGN

NEKO
THINK DESIGN
www.nekolighting.com
2026

2026

NEKO
THINK DESIGN

NEKO LIGHTING AG
Kreuzstrasse 2
CH-8008 Zürich / Switzerland
+41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

CB CE UK CA ISO9001

THINK DESIGN

www.nekolighting.com

NEKO vereint europäisches Denken und asiatische Effizienz

Die Schweizer Firma NEKO LIGHTING bietet seit 2013 effiziente und qualitativ hochwertige LED Architekturbeleuchtung zu einem attraktiven Preis-Leistungsverhältnis. Kombiniert werden europäisches Denken und asiatische Effizienz zur gemeinsamen Firmenphilosophie „Think Design“.

Eigentümer ist Sven Speissegger (Schweiz), welcher über eine langjährige und umfangreiche Erfahrung im Beleuchtungsmarkt verfügt.

NEKO hat seinen Hauptsitz in der Schweiz und verfügt über Lager- und Produktionsstandorte in Europa und China.

In Deutschland, Frankreich, England, Nordamerika/Canada, Peking und Shanghai befinden sich im NEKO Besitz Vertriebsstützpunkte. Eigene Lagerhaltung ist in Deutschland und China vorhanden.

NEKO Leuchten werden exklusiv über ein Distributorennetz in zwischen mehr als 120 Ländern weltweit vertrieben.

Von Beginn an produzierte NEKO nachhaltige LED Leuchten. Für die Produkte setzt NEKO ausschließlich hochwertige LED-Chips namenhafter Hersteller, z. B. Osram, Samsung, Citizen ein. Die verwendeten Treiber besitzen das ENEC-Zeichen.

Alle NEKO Produkte für den Innen- und Außenbereich haben eine Garantie von 5 Jahren. 2019 investierte NEKO in die Produktionsanlage und in die lichttechnischen Labore in China. Die Expansion erforderte größere Räume und einen neuen Standort für die Firma.

NEKO
THINK DESIGN
www.nekolighting.com

NEKO: the union of European thinking and asian Efficiency

NEKO LIGHTING provides high quality as well as efficient LED-lighting solutions at a very competitive price/performance ratio since 2013. By uniting European thinking and asian Efficiency NEKO created its corporate philosophy “Think Design”.

NEKO is owned by Sven Speissegger (Switzerland), with a long track record and extensive know-how in the lighting market.

NEKO is headquartered in Switzerland, with warehouses and factories operating across both Europe and China.

The corporation runs with NEKO owned offices in Germany, France, Great Britain, North America/Canada, Beijing and Shanghai.

NEKO lights are exclusively sold via a distributor network in more than 120 countries worldwide.

NEKO LED-lights were sustainably produced right from the beginning and are solely fitted with premium LED-Chips by renowned manufacturers such as Osram, Samsung and Citizen. All drivers installed come with ENEC-labeling.

All NEKO indoor and outdoor lighting products are backed by a reliable 5-Year Warranty. In 2019, NEKO embarked on an exciting expansion journey driven by the need for larger facilities and a new site, significantly investing in our production facility and state-of-the-art lighting laboratories in China.

NEKO
THINK DESIGN
www.nekolighting.com

NEKO COLORS

Standard white & standard black of NEKO products

RAL 9016 Equivalent	NEKO STANDARD WHITE
PAL 9005	JET BLACK

Besides standard colors as mentioned in the catalogue, any individual RAL classic color can be custom made.

Details for your individual colors

Have the freedom of design a wide range of NEKO products, can now be ordered in any RAL classic color for indoor lighting

The individual color can be produced for you with a reasonable surcharge.

For this customized color the delivery times will be a bit longer.

Please ask our NEKO sales team to support you.



NEKO Color Options & Customization

Discover a range of color solutions to perfectly match your design vision.

Classic

RAL 9016 Equivalent - NEKO Standard White
Delivery time standard lead time

RAL 9005 - Jet Black
Delivery time standard lead time

Collection

RAL 1013 - Oyster White
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7044 - Silk Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7040 - Window Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1035 - Pearl Beige
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 8028 - Terra Brown
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7024 - Graphite Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1002 - Sand Yellow
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1004 - Golden Yellow
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 6027 - Light Green
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 6019 - Pastel Green
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 5014 - Pigeon Blue
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 4011- Pearl Violet
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 3014 - Antique Pink
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

Luxury

Applicable only to the RS25, RS40, FRS72, and PS55 models under the Moduline 26 series.

Brushed Gold
Delivery time standard lead time
Additional cost 30%

Brushed Silver Bronze (Z)
Delivery time standard lead time
Additional cost 30%

INDEX

MINUX Series




MINUX 38 ■007-008
MINUX 44 ■009-010
MINUX 57 ■011-012

SENSE 45 Series




S45R1 ■025-026
S45S1 ■027-028

SENSE 55 Series




S55R1-G2 ■031

SENSE 55H Series



S55HR1-G2 ■032

SENSE 55L Series




S55LR1-G2 ■033-034

SENSE 68 Series



S68R1-G2 ■037-040
S68S1-G2 ■041-040

SENSE 75 Series



S75R1-G2 ■043-046

SENSE 100 Series



S100R1-G2 ■051-054



S100S1-G2 ■055-056



S100HR1-G2 ■057



S100HS1-G2 ■058



S100R7-G2 ■059



S100HR7-G2 ■060



S100R2-G2 ■061



S100HR2-G2 ■062



S100S2-G2 ■063



S100HS2-G2 ■064

SENSE 125 Series



S125R1-G2 ■069



S125S1-G2 ■070



S125R2-G2 ■071



S125S2-G2 ■072

SENSE 150 Series



S150R1-G2 ■075



S150S1-G2 ■076



S150R2-G2 ■077



S150S2-G2 ■078

SENSE New Wall Washer Series



SENSE W75 ■083



SENSE W100 ■084

TAKEO Round Series



T75 ■095-096



T100 Pro ■097-100



T150 Pro ■101-102



T200 Pro ■103-104



T150C Pro ■105-106

TAKEO Square Series



TS68 ■109



TS100 Pro ■110



TS150 Pro ■111



TS200 Pro ■112

PASSION Series



PASSION 100 ■115



PASSION 150 ■117



PASSION 200 ■118

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]


******	-	*	**	**	**	*	-	*	*	-	*
SSR1G2	-	9	30	45	18	D	-	W	S	-	H
Acronym of Model		CRI	CCT	Beam Angle	Power	Lighting Control		Fixture Color	Reflector / Decoration Ring Color		Accessories

SSR1G2-9304518D-WS-H
- SENSE100-G2, Round Trim, Adjustable Version,
- CRI90,CCT3000K,Beam45°,18W,DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.

CLUB LED Module


M1
■131


M2
■132


M3
■133-134


M4
■135-136


M4 Pro
■137-142

New


Cvdr1 Vanity
■143-144

CLUB Trim Series


TA5


TA6


TA7


TA8


TF5


TRF1-IP44


TA5-IP65


TSF1


TSA1


TSA2


TSA3


TSA1D



TSA2D


TSA3D
■145-174

SKYJACK Series


SKYJACK A68
■177-178


SKYJACK D
■179-180


SKYJACK F
■181

FUSION MINI Fixed

New


FUSION MINI FM2
■201


FUSION MINI FM3
■202


FUSION MINI FM4
■203


FUSION MINI FM6
■204

FUSION Fixed



FUSION FF1
■205


FUSION FF2
■207


FUSION FF3
■209


FUSION FX4
■211


FUSION FF5
■213


FUSION FF10
■215

FUSION Fixed Trimless


FUSION FFT5
■225


FUSION FFT10
■215

FUSION Fixed IP65

New


FUSION FF2-IP65
■217


FUSION FF3-IP65
■218


FUSION FF5-IP65
■219


FUSION FF10-IP65
■220

FUSION Adjustable


FUSION FA5
■221


FUSION FA10
■223

FUSION Wall Washer


FUSION FW5
■225


FUSION FW10
■227

FUSION General Light


FUSION FG5
■229


FUSION FG10
■230

FUSION Adjustable Spotlight


FUSION FS1
■235


FUSION FS2
■236


FUSION FS3
■237


FUSION FS6
■238


FUSION FF3-FS1
■239


FUSION FF6-FS2
■240


FUSION G2 Fixed


FUSION G2 FF1
■243


FUSION G2 FF2
■244


FUSION G2 FF3
■245


FUSION G2 FF5
■246


FUSION G2 FF10
■247

FUSION G2 Adjustable


FUSION G2 FA5
■249


FUSION G2 FA10
■250

FUSION Fixed Ceiling

New


FUSION FX4FC
■253


FUSION FF5FC
■254



FUSION FF10FC
■255

FUSION Linear System




FUSION
■257-294

SPACE 60 Linear System

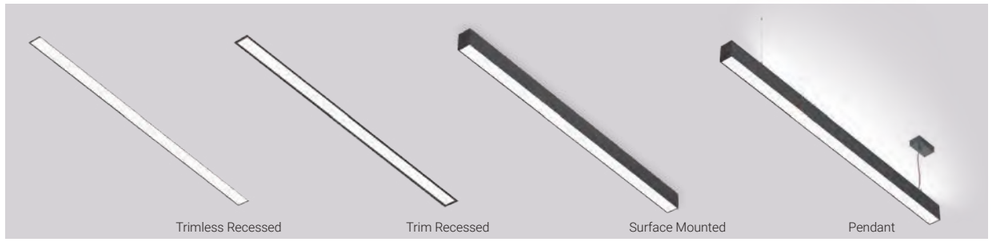

SPACE 60 Linear System
■294-318

SPACE 60 EVO Series New

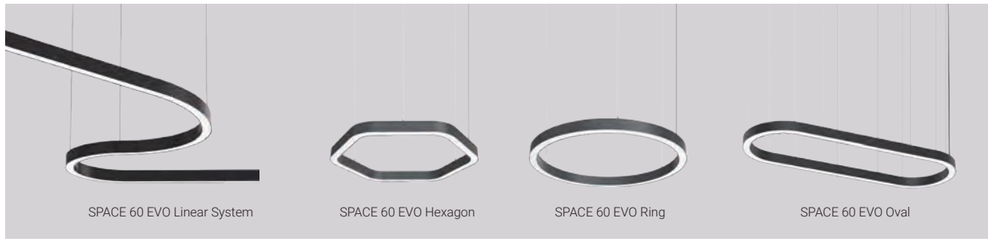


SPACE 60 EVO Linear System
■319-382

SPACE 40 PRO Series New



SPACE 40 PRO Linear System
■383-428

MODULINE 05 24V Linear System

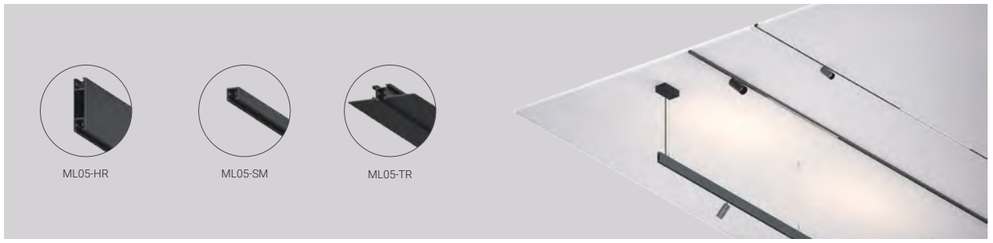


MODULINE 05 Linear System
■429-440

MODULINE 26 48V Linear System



MODULINE 26 Linear System
■441-518

PEARL Series New

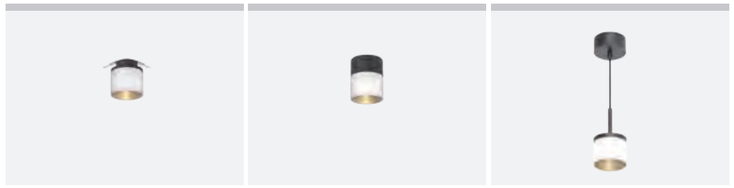


PEARL Semi-recessed
■523

PEARL Ceiling
■525

PEARL Pendant
■526

MOVE Series New



MOVE
■527-530

SPACE 07 Series New



SPACE 07
■531-534

SPACE 16 RING Series New



SPACE 16 RING Ceiline
■535-542

SPACE 16 RING Semi-recessed

GAME Ceiling Light Series



GAME
■ 545-558

SUGAR Ceiling Light Series



SUGAR
■ 559-568

GLAMOR Ceiling Light Series

New



GLAMOR 300
■ 571

GLAMOR 400
■ 572-574

GLAMOR 600
■ 575

MINT Ceiling Light Series



MINT 280
■ 581-584

New

MINT 420
■ 585-588

MIU Art Series

New



MIU Art-S
■ 591

MIU Art-M
■ 592

MIU Art-S DALI
■ 593

MIU Art-M DALI
■ 595

MIU Series



MIU-C M
■ 601

MIU-C L
■ 602

MIU-P S
■ 603

MIU-P M
■ 604

MIU-P L
■ 605

VIBES Series



V1RC
■ 609

V2RC
■ 610

V1SC
■ 611

V2SC
■ 612



V1RR
■ 613

V2RR
■ 614

V1SR
■ 615

V2SR
■ 616

KENZO Series



K1X30
■ 623

K1X55
■ 624

K1X70
■ 625

PURE 25 40 55 Series

New



PURE 25-R
■ 629

PURE 40-R
■ 630

PURE 55-R
■ 631

PURE 40-C
■ 633

PURE 55-C
■ 634

PURE Mounted Series



PURE Art-C
■ 637

PURE S-C
■ 638

PURE Series Tracklight



PURE ART
■ 649

PURE S
■ 651-652

PURE M
■ 653-654

ROXY Series Tracklight



ROXY ART
■ 661-662

ROXY S
■ 663-664

ROXY K
■ 665-666

Zooming
ROXY Art-Z
■ 669

Zooming
ROXY S-Z
■ 670

MISSION Series



MISSION S
■ 675

DASH Smart Series

DSD26
■ 683

DSO26
■ 684

INLINE Series Tracklight



INLINE ST
■ 689

INLINE SP
■ 690

SPIN Series

New



SPIN
■ 695

LED Strip Light



SL2835A
■ 701-702



SL2835B
■ 703-704



SL5050C
■ 705-706




SL2835D
■ 707-708

LED Neon Flex



NF1717T
■ 713-720



NF0817S
■ 721-726



NF1221S
■ 727-732



NF1228S
■ 733-740

LAKEPOINT Series



LAKEPOINT Fixed
■ 749



LAKEPOINT Adjustable
■ 751

CARMEL Series



SKYSURFER SSRC
■ 753



CARMEL Round
■ 755

RIVA Series




RIVA Round
■ 757



RIVA Square
■ 759

CHIC Wall & Ceiling light Series

New



CHIC
■ 761-764

CAMPSBAY Series



CAMPSBAY Single
■ 765



CAMPSBAY Double

LAGOON Series



LAGOON
■ 767

CRUZ D Series



CRUZ D
■ 769

CAPRI Series



CAPRI
■ 771

BAY Series



BAY
■ 773

NICE Series



NICE 250S & NICE 250D
■ 775




NICE 500S & NICE 500D
■ 777

St.Tropez Series



St.Tropez
■ 779

Capetown-Recessed Series




Capetown Round-Recessed
■ 781



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■ 783



Capetown Square-Surface

AMALFI Series

New




AMALFI Single
■ 785-788



AMALFI Triple

POSEIDON Series



POSEIDON S100A
■ 789-792



POSEIDON S100B



POSEIDON S100C

CALIFORNIA Series



CALIFORNIA 12
■ 793



CALIFORNIA 16

DURBAN Series



DURBAN
■ 795

POSITANO Series



POSITANO 300
■ 797



POSITANO 600

PORTOFINO Series



PORTOFINO Adjustable
■ 799

AFTER7 Series



AFTER7 Mini
■ 801




AFTER7 Maxi
■ 802

NEPTUNE Series



NEPTUNE XSU CV
■ 805



NEPTUNE SU CV
■ 806



NEPTUNE MU CV
■ 807



NEPTUNE LU CV
■ 808

New



NEPTUNE SR CV
NEPTUNE SR HV
■ 810

New



NEPTUNE MR CV
NEPTUNE MR HV
■ 811

New



NEPTUNE LR CV
NEPTUNE LR HV
■ 812

TERARACE Series



TERARACE Micro
■ 813



TERARACE Nano
■ 814



TERARACE Mini
■ 815



TERARACE Maxi
■ 816

TERARACE Dimming Series

New



TERARACE Nano
■ 817



TERARACE Mini
■ 818



TERARACE Maxi
■ 819

MINUX

The
Slim
Powerful
Fixed Downlight



MINUX – The Slim & Powerful Fixed Downlight Series

Minimalist slim design with high lumen package
Ceiling cut-outs in Ø38mm, Ø44mm and Ø57mm for trim version
Trimless versions also available (see details in following pages)
Aluminum housing and in wet-painting finish, excellent dissipation performance & antirust

Five different secondary reflectors of dark-light (chrome black), matt, white, black or gold
Beam angles in small, medium and wide for selection
UGR<19 providing visual comfort and quality light

LED chip in standard CRI>90 and 2-step MacAdam for perfect color consistency
Color temperature in 2700K, 3000K and 4000K as standard for selection
IP class in IP65 from front, good for damp applications

Different functions LED driver in On-Off, Phase Dim, 0-10V Dim and DALI Dim





Scale 1:1
millimeter





Trim Version




Trimless Version



El-Trimless Version


MINUX 38 – The Slim & Powerful Fixed Downlight Series




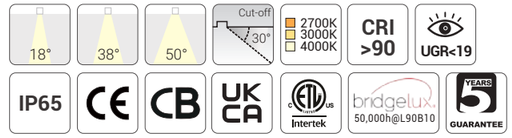


Quick Info

- Ceiling Cut-out: Ø38mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°(UGR<19), 38°(UGR<19), 50°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim








Light Distribution

3000K

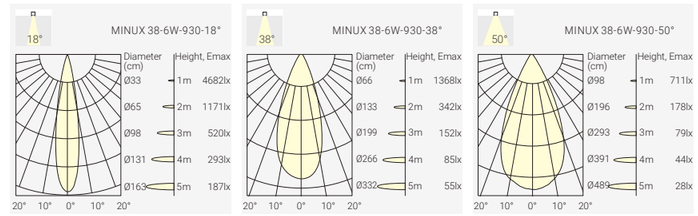

Order Info (MINUX 38 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	34V	200mA	90	2700K	18°	800lm	550lm	MIF3-9271806N-WC
						38°	800lm	550lm	MIF3-9273806N-WC
						50°	800lm	550lm	MIF3-9275006N-WC
					3000K	18°	850lm	600lm	MIF3-9301806N-WC
						38°	850lm	600lm	MIF3-9303806N-WC
						50°	850lm	600lm	MIF3-9305006N-WC
					4000K	18°	900lm	650lm	MIF3-9401806N-WC
						38°	900lm	650lm	MIF3-9403806N-WC
						50°	900lm	650lm	MIF3-9405006N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MIF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF3 MINUX 38 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**06** 6W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT3 MINUX 38 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**B** Black	
MIE3 MINUX 38 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

Trim Finish



White Black

Reflector Options



Dark Light Black Matt White Gold

Optional accessary



Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H

Honeycomb




Soft Ceiling Protection Ring
* for Trim Version ONLY




MINUX 44 – The Slim & Powerful Fixed Downlight Series



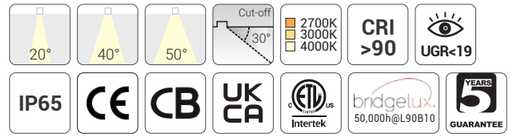


Quick Info

- Ceiling Cut-out: Ø44mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°(UGR<19), 40°(UGR<19), 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

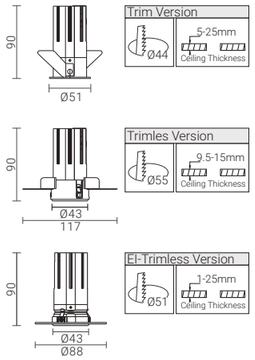

Light Distribution

3000K

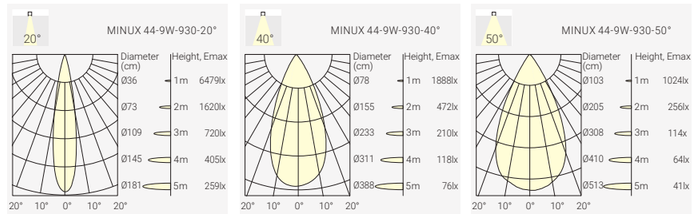

Order Info (MINUX 44 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	20°	1000lm	850lm	MIF4-9272009N-WC
						40°	1000lm	850lm	MIF4-9274009N-WC
						50°	1000lm	850lm	MIF4-9275009N-WC
					3000K	20°	1100lm	900lm	MIF4-9302009N-WC
						40°	1100lm	900lm	MIF4-9304009N-WC
						50°	1100lm	900lm	MIF4-9305009N-WC
					4000K	20°	1200lm	950lm	MIF4-9402009N-WC
						40°	1200lm	950lm	MIF4-9404009N-WC
						50°	1200lm	950lm	MIF4-9405009N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MIF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF4 MINUX 44 Trim Verssion	**927** CRI90/ 2700K	**20** 20°	**09** 9W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT4 MINUX 44 Trimless Version	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**B** Black	
MIE4 MINUX 44 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

Trim Finish



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H

Honeycomb



Soft Ceiling Protection Ring
* for Trim Version ONLY




MINUX 57 – The Slim & Powerful Fixed Downlight Series




Quick Info

- Ceiling Cut-out: Ø57mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°(UGR<19), 36°(UGR<19), 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

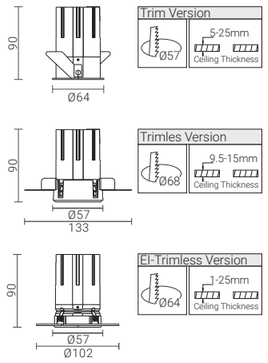

Light Distribution

3000K

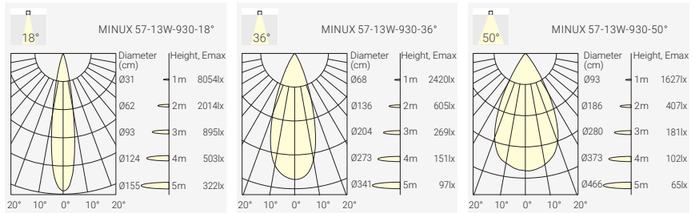

Order Info (MINUX 57 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1400lm	1000lm	MIF5-9271813N-WC
						36°	1400lm	1000lm	MIF5-9273613N-WC
						50°	1400lm	1000lm	MIF5-9275013N-WC
					3000K	18°	1500lm	1050lm	MIF5-9301813N-WC
						36°	1500lm	1050lm	MIF5-9303613N-WC
						50°	1500lm	1050lm	MIF5-9305013N-WC
					4000K	18°	1600lm	1100lm	MIF5-9401813N-WC
						36°	1600lm	1100lm	MIF5-9403613N-WC
						50°	1600lm	1100lm	MIF5-9405013N-WC

Trim Finish



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H

Honeycomb



Soft Ceiling Protection Ring
* for Trim Version ONLY

Coding

MIF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF5 MINUX 57 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT5 MINUX 57 Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**B** Black	
MIE5 MINUX 57 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	



SENSE G2

The Upgraded SENSE Downlight Series
Modular Design Architectural Downlight System
Adjustable and Fixed
LED Engine Power from 4W to 38W
Round & Square, Trim & Trimless
Cutouts in 45mm, 55mm, 68mm, 75mm,
100mm, 125mm, 150mm





SENSE G2

Modular Design Architectural Downlight System

Adjustable and Fixed
LED Engine Power from 4W to 38W
Round & Square, Trim & Trimless
Cutouts in 45mm, 55mm, 68mm, 75mm, 100mm, 125mm, 150mm
Reflector Color in Dark-light(Chrome-black), Specular, Matt, White, Black & Gold

SENSE G2 – Modular Design Architectural Downlight System



S45R1
4W 330lm-380lm



S55R1-G2
7W 500lm-630lm



S68R1-G2
7.5W 850lm-1000lm
11W 1050lm-1200lm



S75R1-G2
9W 750lm-900lm
13W 1050lm-1250lm



S100R1-G2
13W 1350lm-1650lm
18W 1850lm-2200lm



S100HR1-G2
25W 2100lm-2500lm




S125R1-G2
18W 1700lm-2300lm
25W 2300lm-3100lm



S150R1-G2
25W 2800lm-3200lm
38W 4100lm-4700lm





S45S1
4W 330lm-380lm





S68S1-G2
7.5W 850lm-1000lm
11W 1050lm-1200lm





S75S1-G2
9W 750lm-900lm
13W 1050lm-1250lm





S100S1-G2
13W 1300lm-1600lm
18W 1800lm-2150lm






S100HS1-G2
25W 2100lm-2500lm





S125S1-G2
18W 1700lm-2300lm
25W 2300lm-3100lm





S150S1-G2
25W 2800lm-3200lm
38W 4100lm-4700lm



SENSE G2 – Modular Design Architectural Downlight System



S100R7-G2
13W 1350lm-1550lm
18W 1850lm-2150lm

100

S100HR7-G2
25W 2100lm-2400lm

100

S100R2-G2
13W 1200lm-1400lm
18W 1650lm-1900lm

S100S2-G2
13W 1100lm-1350lm
18W 1550lm-1850lm

100

96x96

S100HR2-G2
25W 1850lm-2150lm

S100HS2-G2
25W 1750lm-2100lm

100

96x96

S125R2-G2
18W 1550lm-2050lm
25W 2100lm-2750lm

S125S2-G2
18W 1550lm-2050lm
25W 2100lm-2750lm

125

122x122

S150R2-G2
25W 2500lm-2900lm
38W 3700lm-4300lm


S150S2-G2
25W 2400lm-2800lm
38W 3700lm-4300lm

150

147x147



White



White



Black



Black



Project: Le Bellune Paris Hotel, France






Project: Le Bellune Paris Hotel, France

SENSE S45R1 – Modular Design Architectural Downlight






18° 24° 35° 50° Cut-off 30°
2700K 3000K 4000K
CRI <90
UGR<19
CE CB UKCA ETL Intertek
CREE 50,000h@L80B10
5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18° , 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K

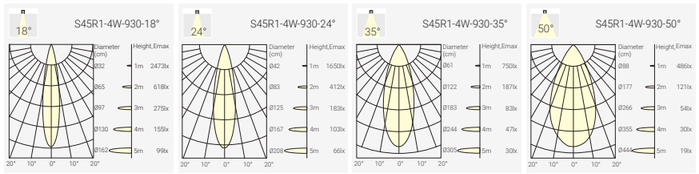

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Code for SUR1-9305004N-WM with Honeycomb
SUR1-9305004N-WM-H

Honeycomb

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
						24°	480lm	330lm	SUR1-9272404N-WM
						35°	480lm	330lm	SUR1-9272504N-WM
						50°	480lm	330lm	SUR1-9275004N-WM
					3000K	18°	500lm	350lm	SUR1-9303804N-WM
						24°	500lm	350lm	SUR1-9302404N-WM
						35°	500lm	350lm	SUR1-9303504N-WM
						50°	500lm	350lm	SUR1-9305004N-WM
					4000K	18°	550lm	380lm	SUR1-9401804N-WM
						24°	550lm	380lm	SUR1-9402404N-WM
						35°	550lm	380lm	SUR1-9403504N-WM
						50°	550lm	380lm	SUR1-9405004N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SUR1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUR1 S45R1	927 CRI90/ 2700K	18 18°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI90/ 3000K	24 24°		F On-Off	B Black	M Matt	
	940 CRI90/ 4000K	35 35°		P Phase Dim		W White	
		50 50°		A 0-10V Dim			
				D DALI Dim			

Ultra Tiny



SENSE S45S1 – Modular Design Architectural Downlight






18° 24° 35° 50° Cut-off 30°
2700K 3000K 4000K
CRI <90
UGR<19
CE CB UKCA ETL US Intertek
CREE 50,000h@L80B10
5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 45x45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K

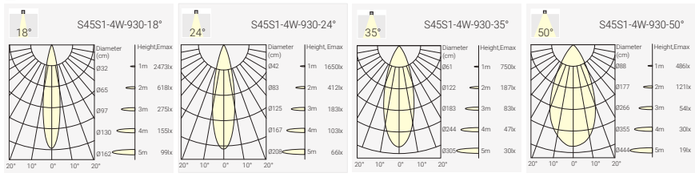

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9272504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9303804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Code for SUS1-9305004N-WM with Honeycomb SUS1-9305004N-WM-H

Honeycomb

Coding

SUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUS1 S45S1	**927** CRI90/ 2700K	**18** 18°	**04** 4W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI90/ 3000K	**24** 24°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**35** 35°		**P** Phase Dim		**W** White	
		50 50°		**A** 0-10V Dim			
				D DALI Dim			

Ultra Tiny



SENSE S55R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New

LED Module



SENSE 55
IP54

SENSE 55H
IP54

SENSE 55L
IP54

Trim



Round Trim

Round El-Trimless

Accessory



Honeycomb



Diffusion Filter

+



Honeycomb



Linear Spread Filter

Reflector



IP20



IP54



Specular



Matt



White



Black



Dark Light



Gold





No Leakage




IP54

SENSE S55R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New



Trimless





24° 36° 45° Cut-off 45° 2700K 3000K 4000K CRI <90 UGR<19


CE CB UKCA ETL US Intertek bridgelux 50,000h@L90B10 YEARS 5 GUARANTEE

Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 630lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

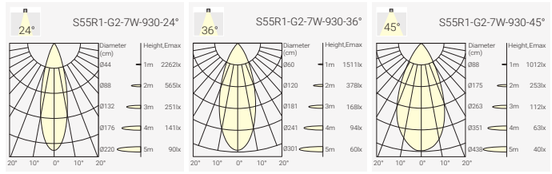

Order Info (SENSE S55R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	8.5W	33V	200mA	90	2700K	24°	850lm	500lm	SXR1G2-9272407N-WB
						36°	850lm	550lm	SXR1G2-9273607N-WB
						45°	850lm	550lm	SXR1G2-9274507N-WB
					3000K	24°	900lm	530lm	SXR1G2-9302407N-WB
						36°	900lm	600lm	SXR1G2-9303607N-WB
						45°	900lm	600lm	SXR1G2-9304507N-WB
					4000K	24°	950lm	550lm	SXR1G2-9402407N-WB
						36°	950lm	630lm	SXR1G2-9403607N-WB
						45°	950lm	630lm	SXR1G2-9404507N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessary



Code for SXR1G2-9303607N-WB with Honeycomb
SXR1G2-9303607N-WB-H

Honeycomb

Coding

SXR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXR1G2 SENSE S55R1-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EXR1G2 SENSE S55RT1-EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE S55HR1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New



Trimless





24° 36° 45° Cut-off 45° 2700K 3000K 4000K CRI <90 UGR<19


CE CB UKCA ETL US Intertek bridgelux 50,000h@L90B10 YEARS 5 GUARANTEE

Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 10W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 880lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

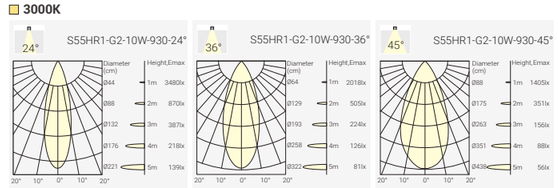

Order Info (SENSE S55HR1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1500lm	750lm	SXR1G2-9272410N-WB
						36°	1500lm	800lm	SXR1G2-9273610N-WB
						45°	1500lm	800lm	SXR1G2-9274510N-WB
					3000K	24°	1600lm	800lm	SXR1G2-9302410N-WB
						36°	1600lm	850lm	SXR1G2-9303610N-WB
						45°	1600lm	850lm	SXR1G2-9304510N-WB
					4000K	24°	1700lm	820lm	SXR1G2-9402410N-WB
						36°	1700lm	880lm	SXR1G2-9403610N-WB
						45°	1700lm	880lm	SXR1G2-9404510N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessary



Code for SXR1G2-9303610N-WB with Honeycomb
SXR1G2-9303610N-WB-H

Honeycomb

Coding

SXR1G2 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXR1G2 SENSE S55HR1-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**10** 10W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EXR1G2 SENSE S55HRT1-EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	


SENSE S55LR1-G2 – Adjustable Downlight with Seamless Gradient Lighting


New



Trimless





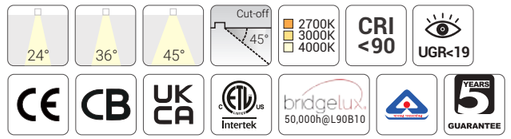


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 8W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

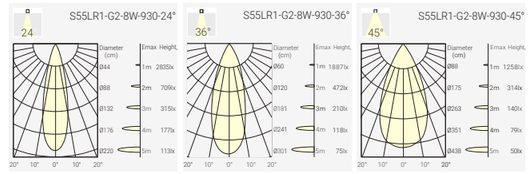

Order Info (SENSE S55LR1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	24°	1000lm	650lm	SFR1G2-9272408N-WB
						36°	1000lm	700lm	SFR1G2-9273608N-WB
						45°	1000lm	700lm	SFR1G2-9274508N-WB
					3000K	24°	1100lm	670lm	SFR1G2-9302408N-WB
						36°	1100lm	750lm	SFR1G2-9303608N-WB
						45°	1100lm	750lm	SFR1G2-9304508N-WB
					4000K	24°	1200lm	700lm	SFR1G2-9402408N-WB
						36°	1200lm	780lm	SFR1G2-9403608N-WB
						45°	1200lm	780lm	SFR1G2-9404508N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Coding

SFR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SFR1G2 SENSE S55LR1-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**08** 8W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EFR1G2 SENSE S55LRT1-EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

Optional accessary



Honeycomb

Code for SFR1G2-9303608N-WB with Honeycomb
SFR1G2-9303608N-WB-H



SENSE G2 – Modular Design Architectural Downlight System

Project: Michael Kors Boutique, Garden City, New York, USA



SENSE 68-G2 – Modular Design Architectural Downlight

LED Engine



S68G2 LED Engine

Accessory



Honeycomb



Diffusion Cover



Round Trim



Round Trimless



Round EI-Trimless



Square Trim



Square Trimless



Square EI-Trimless

Reflector



Black Dark Light Gold White Specular Matt



Black Dark Light Gold White Specular Matt

Model



S68R1-G2



S68RT1-G2



S68RT1-EI-G2



S68S1-G2




S68ST1-G2



S68ST1-EI-G2



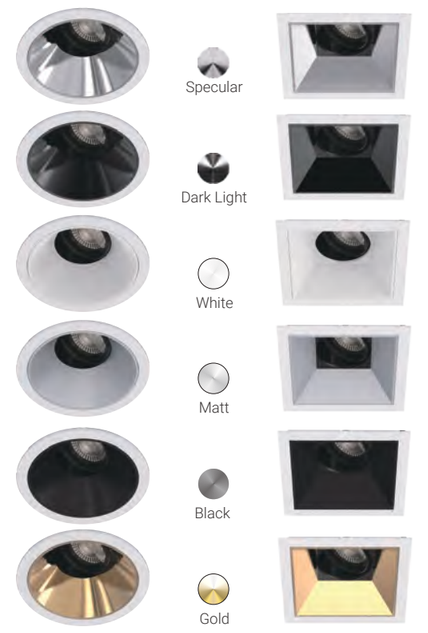

Specular

Dark Light

White


Matt


Black

Gold

SENSE S68R1-G2 – Modular Design Architectural Downlight



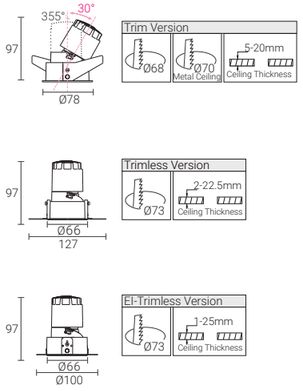

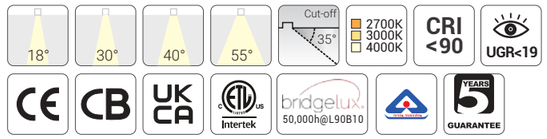


Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling : Ø70mm) for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

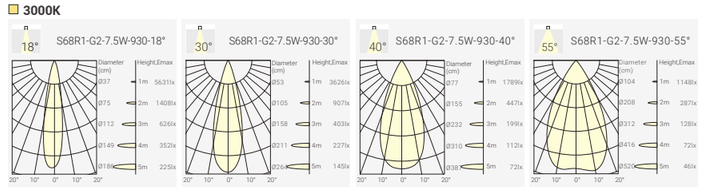

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	250mA	90	2700K	18°	1000lm	900lm	STR1G2-9271808N-WC
						30°	1000lm	900lm	STR1G2-9273008N-WC
						40°	1000lm	850lm	STR1G2-9274008N-WC
						55°	1000lm	850lm	STR1G2-9275508N-WC
					3000K	18°	1100lm	950lm	STR1G2-9301808N-WC
						30°	1100lm	950lm	STR1G2-9303008N-WC
						40°	1100lm	900lm	STR1G2-9301408N-WC
						55°	1100lm	900lm	STR1G2-9301558N-WC
					4000K	18°	1200lm	1000lm	STR1G2-9401808N-WC
						30°	1200lm	1000lm	STR1G2-9403008N-WC
						40°	1200lm	950lm	STR1G2-9404008N-WC
						55°	1200lm	950lm	STR1G2-9405508N-WC
11W	13W	34V	300mA	90	2700K	18°	1200lm	1100lm	STR1G2-9271811N-WC
						30°	1200lm	1100lm	STR1G2-9273011N-WC
						40°	1200lm	1050lm	STR1G2-9274011N-WC
						55°	1200lm	1050lm	STR1G2-9275511N-WC
					3000K	18°	1300lm	1150lm	STR1G2-9301811N-WC
						30°	1300lm	1150lm	STR1G2-9303011N-WC
						40°	1300lm	1100lm	STR1G2-9301411N-WC
						55°	1300lm	1100lm	STR1G2-9305511N-WC
					4000K	18°	1400lm	1200lm	STR1G2-9401811N-WC
						30°	1400lm	1200lm	STR1G2-9403011N-WC
						40°	1400lm	1150lm	STR1G2-9404011N-WC
						55°	1400lm	1150lm	STR1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for STR1G2-9305511N-WM with Honeycomb
STR1G2-9305511N-WM-H

Honeycomb


Coding

STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 0-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 68 -G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	35V	200mA	90	2700K	12°	800lm	450lm	STR1G2-9271206N-WC
					3000K	12°	850lm	480lm	STR1G2-9301206N-WC
					4000K	12°	900lm	500lm	STR1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding


STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S68S1-G2 – Modular Design Architectural Downlight



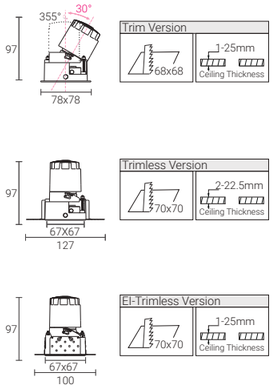


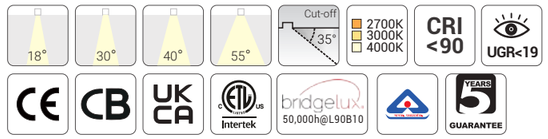

Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

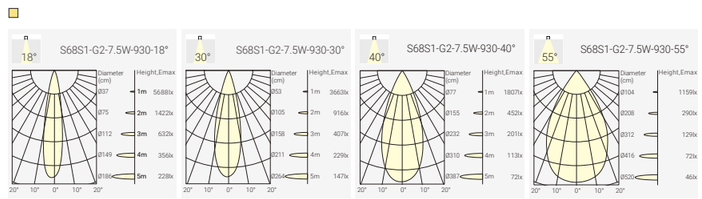

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	250mA	90	2700K	18°	1000lm	900lm	STS1G2-9271808N-WC
						30°	1000lm	900lm	STS1G2-9273008N-WC
						40°	1000lm	850lm	STS1G2-9274008N-WC
						55°	1000lm	850lm	STS1G2-9275508N-WC
					3000K	18°	1100lm	950lm	STS1G2-9301808N-WC
						30°	1100lm	950lm	STS1G2-9303008N-WC
						40°	1100lm	900lm	STS1G2-9301408N-WC
						55°	1100lm	900lm	STS1G2-9301558N-WC
					4000K	18°	1200lm	1000lm	STS1G2-9401808N-WC
						30°	1200lm	1000lm	STS1G2-9403008N-WC
						40°	1200lm	950lm	STS1G2-9404008N-WC
						55°	1200lm	950lm	STS1G2-9405508N-WC
11W	13W	34V	300mA	90	2700K	18°	1200lm	1100lm	STS1G2-9271811N-WC
						30°	1200lm	1100lm	STS1G2-9273011N-WC
						40°	1200lm	1050lm	STS1G2-9274011N-WC
						55°	1200lm	1050lm	STS1G2-9275511N-WC
					3000K	18°	1300lm	1150lm	STS1G2-9301811N-WC
						30°	1300lm	1150lm	STS1G2-9303011N-WC
						40°	1300lm	1100lm	STS1G2-9301411N-WC
						55°	1300lm	1100lm	STS1G2-9305511N-WC
					4000K	18°	1400lm	1200lm	STS1G2-9401811N-WC
						30°	1400lm	1200lm	STS1G2-9403011N-WC
						40°	1400lm	1150lm	STS1G2-9404011N-WC
						55°	1400lm	1150lm	STS1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for STS1G2-9304004N-WM with Honeycomb
STS1G2-9304004N-WM-H

Honeycomb


Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 TrimVersion	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 TrimlessVersion	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-TrimlessVersion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 0-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	35V	200mA	90	2700K	12°	800lm	450lm	STS1G2-9271206N-WC
					3000K	12°	850lm	480lm	STS1G2-9301206N-WC
					4000K	12°	900lm	500lm	STS1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S75R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New

SENSE 75



Honeycomb | Diffusion Filter | LED Module IP20/IP54 | Diffusion Filter+Honeycomb

Trim



Round Trim



Round-EI Trimless



Square Trim



Square-EI Trimless



Square Trim



Square-EI Trimless

Engine Holder





Reflector



Specular | Matt | White | Black | Dark Light | Gold



Specular | Matt | White | Black | Dark Light | Gold

SENSE S75R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New





24° 36° 50° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19


CE CB UKCA Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø75mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 9W/13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20 (LED Module IP20/54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim










Light Distribution

3000K

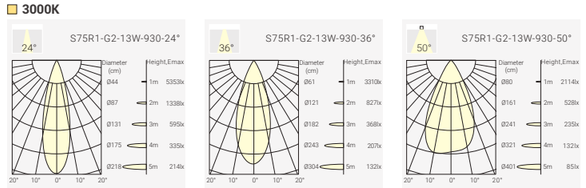

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	24°	1000lm	750lm	SGR1G2-9272409N-WB
						36°	1000lm	800lm	SGR1G2-9273609N-WB
						50°	1000lm	800lm	SGR1G2-9275009N-WB
					3000K	24°	1100lm	800lm	SGR1G2-9302409N-WB
						36°	1100lm	850lm	SGR1G2-9303609N-WB
						50°	1100lm	850lm	SGR1G2-9305009N-WB
					4000K	24°	1200lm	850lm	SGR1G2-9402409N-WB
						36°	1200lm	900lm	SGR1G2-9403609N-WB
						50°	1200lm	900lm	SGR1G2-9405009N-WB
13W	15W	34V	350mA	90	2700K	24°	1400lm	1050lm	SGR1G2-9272413N-WB
						36°	1400lm	1150lm	SGR1G2-9273613N-WB
						50°	1400lm	1150lm	SGR1G2-9275013N-WB
					3000K	24°	1500lm	1100lm	SGR1G2-9302413N-WB
						36°	1500lm	1200lm	SGR1G2-9303613N-WB
						50°	1500lm	1200lm	SGR1G2-9305013N-WB
					4000K	24°	1600lm	1150lm	SGR1G2-9402413N-WB
						36°	1600lm	1250lm	SGR1G2-9403613N-WB
						50°	1600lm	1250lm	SGR1G2-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessary



Code for SGR1G2-9303613N-WB with Honeycomb SGR1G2-9303613N-WB-H

Honeycomb

Coding

SGR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGR1G2 SENSE S75R1-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
SGR4G2 SENSE S75RT1-G2 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**13** 13W	**F** On-Off	**B** Black	**M** Matt	
EGR1G2 SENSE S75RT1-EI-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE S75S1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New





24° 36° 50° Cut-off 44° 2700K 3000K 4000K CRI <90 UGR<19


CE CB UKCA Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: 75x75mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 9W/13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20 (LED Module IP20/54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim










Light Distribution

3000K

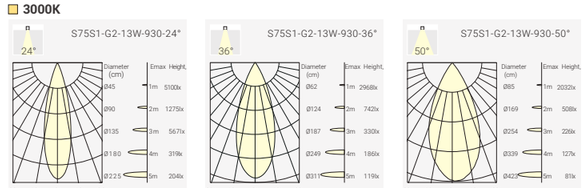

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	24°	1000lm	750lm	SGS1G2-9272409N-WB
						36°	1000lm	800lm	SGS1G2-9273609N-WB
						50°	1000lm	800lm	SGS1G2-9275009N-WB
					3000K	24°	1100lm	800lm	SGS1G2-9302409N-WB
						36°	1100lm	850lm	SGS1G2-9303609N-WB
						50°	1100lm	850lm	SGS1G2-9305009N-WB
					4000K	24°	1200lm	850lm	SGS1G2-9402409N-WB
						36°	1200lm	900lm	SGS1G2-9403609N-WB
						50°	1200lm	900lm	SGS1G2-9405009N-WB
13W	15W	34V	350mA	90	2700K	24°	1400lm	1050lm	SGS1G2-9272413N-WB
						36°	1400lm	1150lm	SGS1G2-9273613N-WB
						50°	1400lm	1150lm	SGS1G2-9275013N-WB
					3000K	24°	1500lm	1100lm	SGS1G2-9302413N-WB
						36°	1500lm	1200lm	SGS1G2-9303613N-WB
						50°	1500lm	1200lm	SGS1G2-9305013N-WB
					4000K	24°	1600lm	1150lm	SGS1G2-9402413N-WB
						36°	1600lm	1250lm	SGS1G2-9403613N-WB
						50°	1600lm	1250lm	SGS1G2-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessary



Code for SGS1G2-9303613N-WB with Honeycomb SGS1G2-9303613N-WB-H

Honeycomb

Coding

SGS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGS1G2 SENSE S75S1-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
SGS4G2 SENSE S75ST1-G2 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**13** 13W	**F** On-Off	**B** Black	**M** Matt	
EGS1G2 SENSE S75ST1-EI-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE G2 – Modular Design Architectural Downlight System

Project: The Mist Hot Spring Hotel, Xuchang, China







SENSE G2 – Modular Design Architectural Downlight System

Project: Holiday Inn Pattaya, Thailand



SENSE 100-G2 – Modular Design Architectural Downlight System



S100G2 LED Engine

Adjustable/ Fixed



S100HG2 LED Engine

Adjustable/ Fixed

Trim



Round Trim



Round Trimless



Round EI-Trimless



Square Trim



Square Trimless



Square EI-Trimless

Accessory



Honeycomb



Linear Spread Filter



Diffusion Filter



Honeycomb



Linear Spread Filter



Diffusion Filter

Reflector



Round Adjustable



Round Fixed (Horn Type)



Round Fixed



Square Adjustable



Square Fixed

Anti-Glare Ring



(Straight Type)



(Curve Type,Option)



(Straight Type)



(Curve Type,Option)

Second Accessory



(Option)



(Option)

Model



S100R1-G2



S100R1-G2-CA



S100R7-G2



S100R2-G2



S100S1-G2



S100S1-G2-CA



S100S2-G2


Secondary Reflector



Specular Dark Light Matt White Black Gold


SENSE S100R1-G2 – Modular Design Architectural Downlight




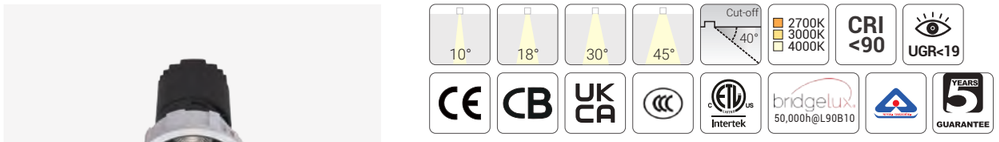

Quick Info


- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 10°, 18°, 30°, 45°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

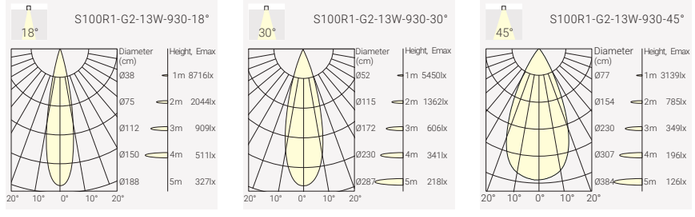

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1350lm	SSR1G2-9271813N-WC
						30°	1700lm	1500lm	SSR1G2-9273013N-WC
						45°	1700lm	1450lm	SSR1G2-9274513N-WC
					3000K	18°	1800lm	1400lm	SSR1G2-9301813N-WC
						30°	1800lm	1600lm	SSR1G2-9303013N-WC
						45°	1800lm	1500lm	SSR1G2-9304513N-WC
					4000K	18°	1900lm	1450lm	SSR1G2-9401813N-WC
						30°	1900lm	1650lm	SSR1G2-9403013N-WC
						45°	1900lm	1550lm	SSR1G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	18°	2400lm	1850lm	SSR1G2-9271818N-WC
						30°	2400lm	2100lm	SSR1G2-9273018N-WC
						45°	2400lm	2050lm	SSR1G2-9274518N-WC
					3000K	18°	2500lm	1900lm	SSR1G2-9301818N-WC
						30°	2500lm	2150lm	SSR1G2-9303018N-WC
						45°	2500lm	2100lm	SSR1G2-9304518N-WC
					4000K	18°	2600lm	2000lm	SSR1G2-9401818N-WC
						30°	2600lm	2200lm	SSR1G2-9403018N-WC
						45°	2600lm	2150lm	SSR1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H

Honeycomb


Coding

SSR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	35V	200mA	90	2700K	10°	800lm	620lm	SSR1G2-9271007N-WC
					3000K	10°	850lm	650lm	SSR1G2-9301007N-WC
					4000K	10°	900lm	680lm	SSR1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SSR1G2 – *** ** ** * – * * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
EXR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100S1-G2 – Modular design architectural downlight




Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 10°, 18°, 30°, 45°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

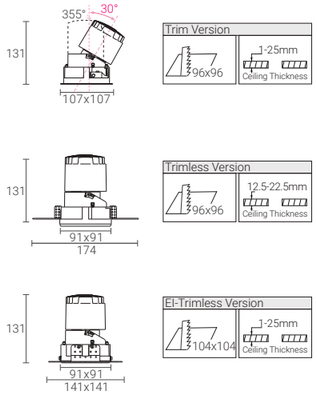

Light Distribution

3000K

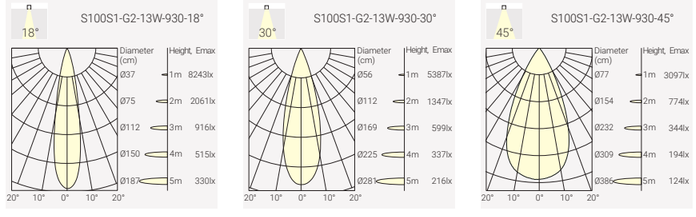

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1300lm	SSS1G2-9271813N-WC
						30°	1700lm	1450lm	SSS1G2-9273013N-WC
						45°	1700lm	1400lm	SSS1G2-9274513N-WC
					3000K	18°	1800lm	1350lm	SSS1G2-9301813N-WC
						30°	1800lm	1550lm	SSS1G2-9303013N-WC
						45°	1800lm	1450lm	SSS1G2-9304513N-WC
					4000K	18°	1900lm	1400lm	SSS1G2-9401813N-WC
						30°	1900lm	1600lm	SSS1G2-9403013N-WC
						45°	1900lm	1500lm	SSS1G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	18°	2400lm	1800lm	SSS1G2-9271818N-WC
						30°	2400lm	2050lm	SSS1G2-9273018N-WC
						45°	2400lm	2000lm	SSS1G2-9274518N-WC
					3000K	18°	2500lm	1850lm	SSS1G2-9301818N-WC
						30°	2500lm	2100lm	SSS1G2-9303018N-WC
						45°	2500lm	2050lm	SSS1G2-9304518N-WC
					4000K	18°	2600lm	1950lm	SSS1G2-9401818N-WC
						30°	2600lm	2150lm	SSS1G2-9403018N-WC
						45°	2600lm	2100lm	SSS1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SSS1G2-9301813N-WM with Honeycomb
SSS1G2-9301813N-WM-H

Honeycomb


Coding

SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	35V	200mA	90	2700K	10°	800lm	620lm	SSS1G2-9271007N-WC
					3000K	10°	850lm	650lm	SSS1G2-9301007N-WC
					4000K	10°	900lm	680lm	SSS1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HR1-G2 – Modular Design Architectural Downlight



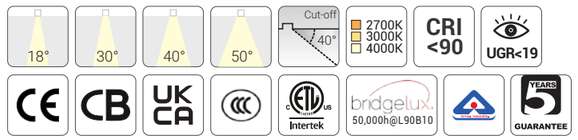


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2500lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

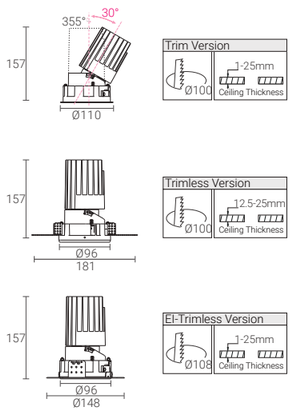

Light Distribution

3000K

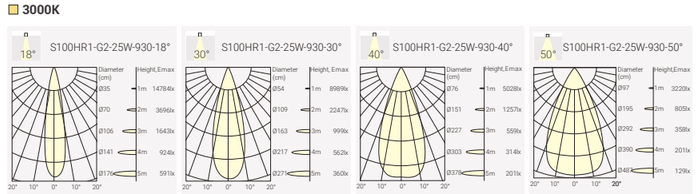

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	18°	2900lm	2100lm	SHR1G2-9271825N-WC
						30°	2900lm	2300lm	SHR1G2-9273025N-WC
						40°	2900lm	2250lm	SHR1G2-9274025N-WC
						50°	2900lm	2200lm	SHR1G2-9275025N-WC
					3000K	18°	3000lm	2200lm	SHR1G2-9301825N-WC
						30°	3000lm	2400lm	SHR1G2-9303025N-WC
						40°	3000lm	2350lm	SHR1G2-9304025N-WC
						50°	3000lm	2300lm	SHR1G2-9305025N-WC
					4000K	18°	3100lm	2300lm	SHR1G2-9401825N-WC
						30°	3100lm	2500lm	SHR1G2-9403025N-WC
						40°	3100lm	2400lm	SHR1G2-9404025N-WC
						50°	3100lm	2350lm	SHR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H

Honeycomb


Coding

SHR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHR1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HS1-G2 – Modular Design Architectural Downlight



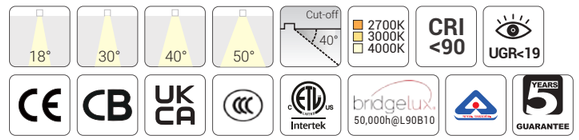


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90, Bridgelux
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2500lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

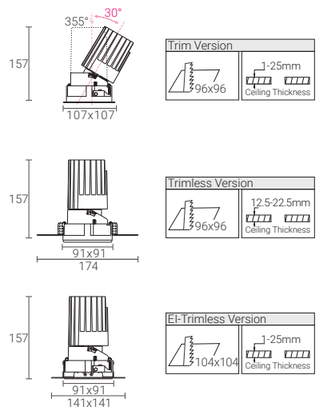

Light Distribution

3000K

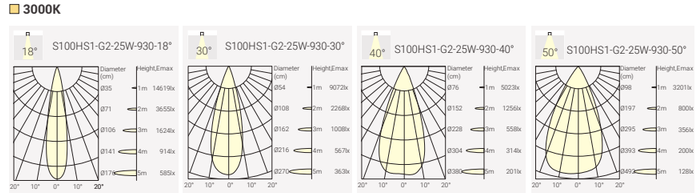

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	18°	2900lm	2100lm	SHS1G2-9271825N-WC
						30°	2900lm	2300lm	SHS1G2-9273025N-WC
						40°	2900lm	2250lm	SHS1G2-9274025N-WC
						50°	2900lm	2200lm	SHS1G2-9275025N-WC
					3000K	18°	3000lm	2200lm	SHS1G2-9301825N-WC
						30°	3000lm	2400lm	SHS1G2-9303025N-WC
						40°	3000lm	2350lm	SHS1G2-9304025N-WC
						50°	3000lm	2300lm	SHS1G2-9305025N-WC
					4000K	18°	3100lm	2300lm	SHS1G2-9401825N-WC
						30°	3100lm	2500lm	SHS1G2-9403025N-WC
						40°	3100lm	2400lm	SHS1G2-9404025N-WC
						50°	3100lm	2350lm	SHS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SHS1G2-9301825N-WM with Honeycomb
SHS1G2-9301825N-WM-H

Honeycomb


Coding

SHS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHS1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100R7-G2 – Modular Design Architectural Downlight



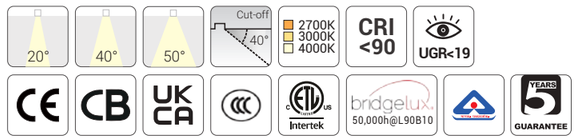


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

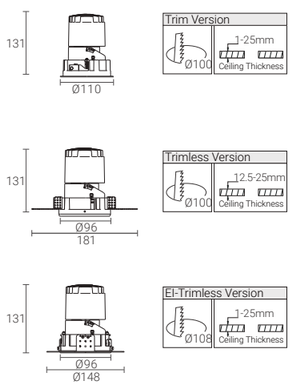

Light Distribution

3000K

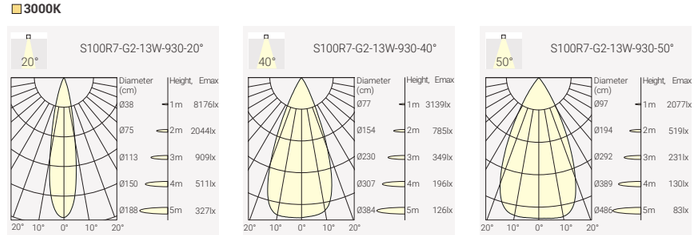

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1350lm	SSR7G2-9272013N-WC
						40°	1700lm	1450lm	SSR7G2-9274013N-WC
						50°	1700lm	1450lm	SSR7G2-9275013N-WC
					3000K	20°	1800lm	1400lm	SSR7G2-9302013N-WC
						40°	1800lm	1500lm	SSR7G2-9304013N-WC
						50°	1800lm	1500lm	SSR7G2-9305013N-WC
					4000K	20°	1900lm	1450lm	SSR7G2-9402013N-WC
						30°	1900lm	1550lm	SSR7G2-9404013N-WC
						50°	1900lm	1550lm	SSR7G2-9405013N-WC
18W	21W	35V	500mA	90	2700K	20°	2400lm	1850lm	SSR7G2-9272018N-WC
						40°	2400lm	2000lm	SSR7G2-9274018N-WC
						50°	2400lm	2000lm	SSR7G2-9275018N-WC
					3000K	20°	2500lm	1900lm	SSR7G2-9302018N-WC
						40°	2500lm	2100lm	SSR7G2-9304018N-WC
						50°	2500lm	2100lm	SSR7G2-9305018N-WC
					4000K	20°	2600lm	2000lm	SSR7G2-9402018N-WC
						40°	2600lm	2150lm	SSR7G2-9404018N-WC
						50°	2600lm	2150lm	SSR7G2-9405018N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SSR7G2-9304013N-WM with Honeycomb
SSR7G2-9304013N-WM-H

Honeycomb


Coding

SSR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR7G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR84G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR7G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HR7-G2 – Modular Design Architectural Downlight



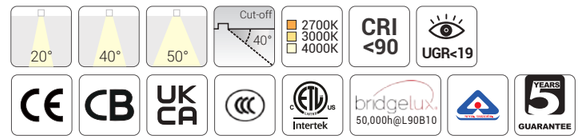


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

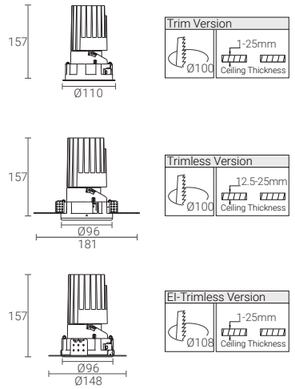

Light Distribution

3000K

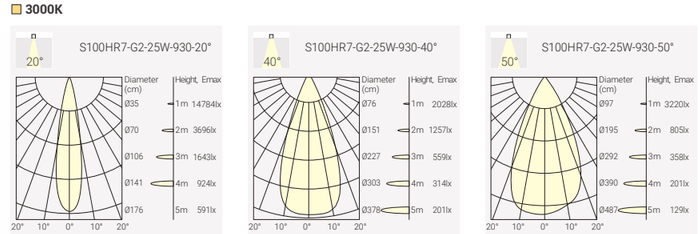

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	20°	2900lm	2100lm	SHR7G2-9272025N-WC
						40°	2900lm	2200lm	SHR7G2-9274025N-WC
						50°	2900lm	2200lm	SHR7G2-9275025N-WC
					3000K	20°	3000lm	2200lm	SHR7G2-9302025N-WC
						40°	3000lm	2300lm	SHR7G2-9304025N-WC
						50°	3000lm	2300lm	SHR7G2-9305025N-WC
					4000K	20°	3100lm	2300lm	SHR7G2-9402025N-WC
						20°	3100lm	2400lm	SHR7G2-9402025N-WC
						30°	3100lm	2400lm	SHR7G2-9404025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H


Honeycomb


Coding

SHR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR7G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR8G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**M** Matt	
EHR7G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100R2-G2 – Modular Design Architectural Downlight

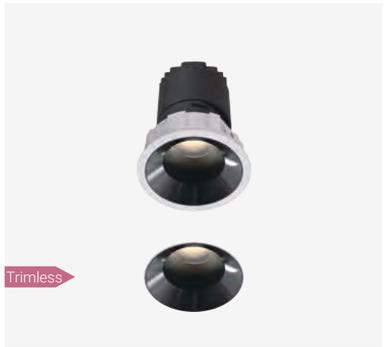

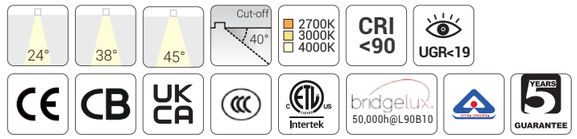


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

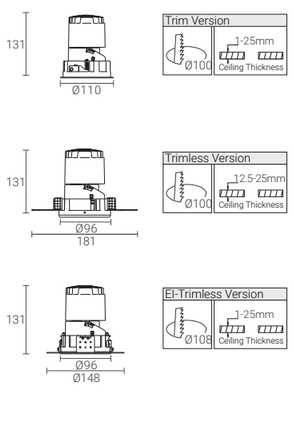

Light Distribution

3000K

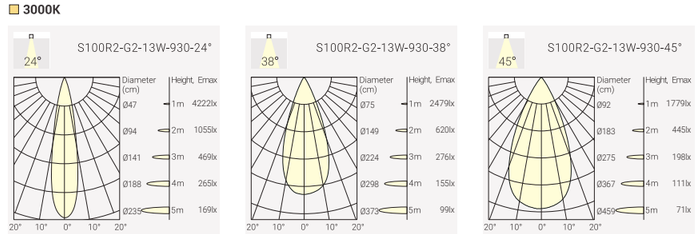

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	24°	1700lm	1200lm	SSR2G2-9272413N-WC
						38°	1700lm	1300lm	SSR2G2-9273813N-WC
						45°	1700lm	1250lm	SSR2G2-9274513N-WC
					3000K	24°	1800lm	1250lm	SSR2G2-9302413N-WC
						38°	1800lm	1350lm	SSR2G2-9303813N-WC
						45°	1800lm	1300lm	SSR2G2-9304513N-WC
					4000K	24°	1900lm	1300lm	SSR2G2-9402413N-WC
						38°	1900lm	1400lm	SSR2G2-9403813N-WC
						45°	1900lm	1350lm	SSR2G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	24°	2400lm	1650lm	SSR2G2-9272418N-WC
						38°	2400lm	1800lm	SSR2G2-9273818N-WC
						45°	2400lm	1750lm	SSR2G2-9274518N-WC
					3000K	24°	2500lm	1700lm	SSR2G2-9302418N-WC
						38°	2500lm	1850lm	SSR2G2-9303818N-WC
						45°	2500lm	1800lm	SSR2G2-9304518N-WC
					4000K	24°	2600lm	1750lm	SSR2G2-9402418N-WC
						38°	2600lm	1900lm	SSR2G2-9403818N-WC
						45°	2600lm	1850lm	SSR2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H

Honeycomb


Coding

SSR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HR2-G2 – Modular Design Architectural Downlight



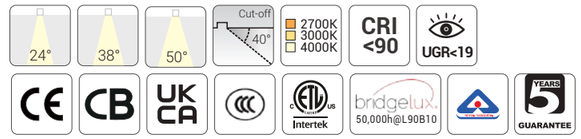


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

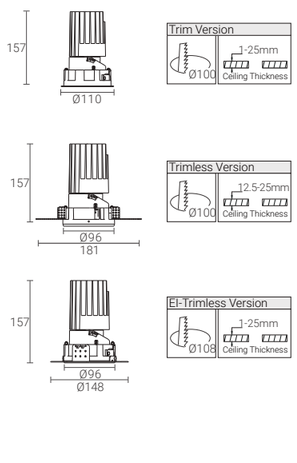

Light Distribution

3000K

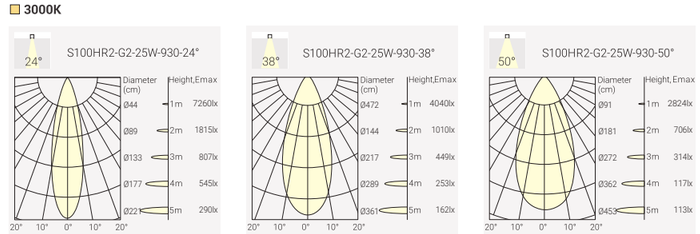

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	24°	2900lm	1850lm	SHR2G2-9272425N-WC
						38°	2900lm	2000lm	SHR2G2-9273825N-WC
						50°	2900lm	1950lm	SHR2G2-9275025N-WC
					3000K	24°	3000lm	1950lm	SHR2G2-9302425N-WC
						38°	3000lm	2100lm	SHR2G2-9303825N-WC
						50°	3000lm	2000lm	SHR2G2-9305025N-WC
					4000K	24°	3100lm	2000lm	SHR2G2-9402425N-WC
						38°	3100lm	2150lm	SHR2G2-9403825N-WC
						50°	3100lm	2100lm	SHR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SHR2G2-9305025N-WM with Honeycomb
SHR2G2-9305025N-WM-H

Honeycomb


Coding

SHR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR5G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR5G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHR5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100S2-G2 – Modular Design Architectural Downlight



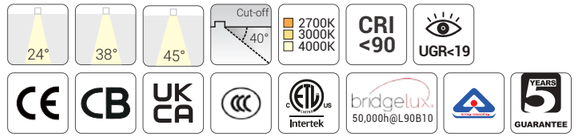


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

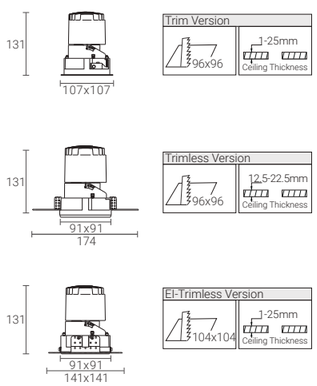

Light Distribution

3000K

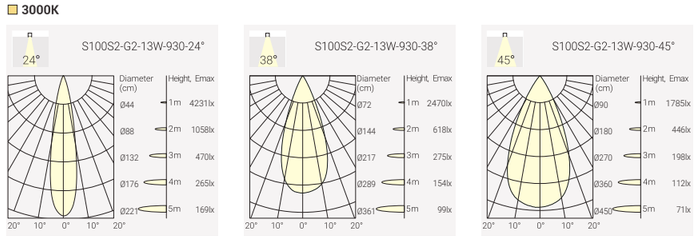

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	24°	1700lm	1100lm	SSS2G2-9272413N-WC
						38°	1700lm	1250lm	SSS2G2-9273813N-WC
						45°	1700lm	1200lm	SSS2G2-9274513N-WC
					3000K	24°	1800lm	1150lm	SSS2G2-9302413N-WC
						38°	1800lm	1300lm	SSS2G2-9303813N-WC
						45°	1800lm	1250lm	SSS2G2-9304513N-WC
					4000K	24°	1900lm	1200lm	SSS2G2-9402413N-WC
						38°	1900lm	1350lm	SSS2G2-9403813N-WC
						45°	1900lm	1300lm	SSS2G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	24°	2400lm	1550lm	SSS2G2-9272418N-WC
						38°	2400lm	1750lm	SSS2G2-9273818N-WC
						50°	2400lm	1700lm	SSS2G2-9274518N-WC
					3000K	24°	2500lm	1600lm	SSS2G2-9302418N-WC
						38°	2500lm	1800lm	SSS2G2-9303818N-WC
						45°	2500lm	1750lm	SSS2G2-9304518N-WC
					4000K	24°	2600lm	1650lm	SSS2G2-9402418N-WC
						38°	2600lm	1850lm	SSS2G2-9403818N-WC
						45°	2600lm	1800lm	SSS2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SSS2G2-9302413N-WM with Honeycomb
SSS2G2-9302413N-WM-H

Honeycomb


Coding

SSS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HS2-G2 – Modular Design Architectural Downlight



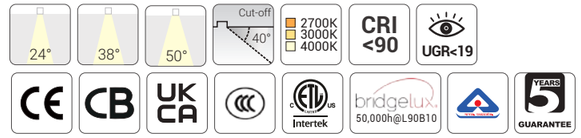


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

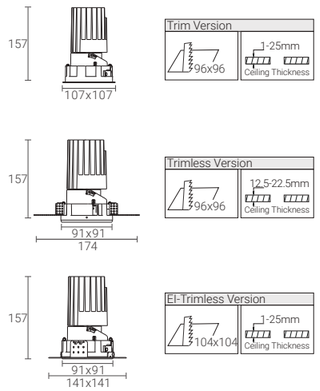

Light Distribution

3000K

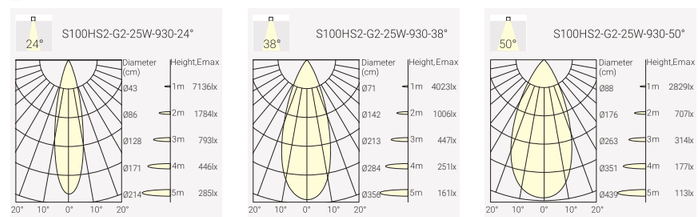

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	24°	2900lm	1750lm	SHS2G2-9272425N-WC
						38°	2900lm	1950lm	SHS2G2-9273825N-WC
						50°	2900lm	1850lm	SHS2G2-9275025N-WC
					3000K	24°	3000lm	1800lm	SHS2G2-9302425N-WC
						38°	3000lm	2000lm	SHS2G2-9303825N-WC
						50°	3000lm	1950lm	SHS2G2-9305025N-WC
					4000K	24°	3100lm	1900lm	SHS2G2-9402425N-WC
						38°	3100lm	2100lm	SHS2G2-9403825N-WC
						50°	3100lm	2000lm	SHS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SHS2G2-9302425N-WM with Honeycomb
SHS2G2-9302425N-WM-H

Honeycomb

Coding

SHS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS5G2 SENSE 100-G2H Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS5G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHS5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE G2 – Modular Design Architectural Downlight System

Project: InterContinental Hotels & Resorts, Hefei, China





Project: Mecca Cosmetica, Australia

SENSE S125R1-G2 – Modular Design Architectural Downlight System




20° 40° 50° Cut-off 40° 2700K 3000K 4000K CRI <90 UGR<19

CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 GUARANTEE 5 YEARS


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

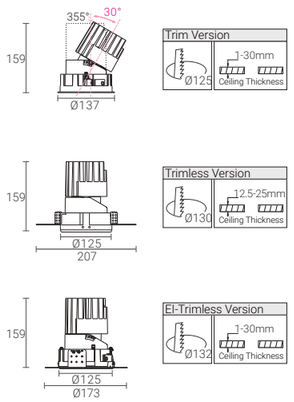

Light Distribution

3000K

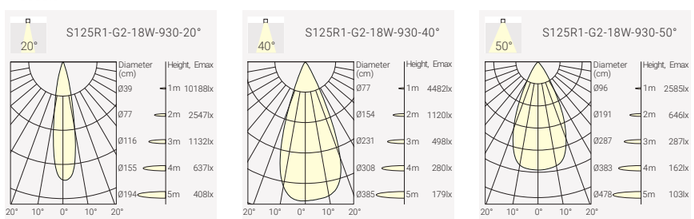

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	20°	2600lm	1800lm	SMR1G2-9272018N-WC
						40°	2600lm	2000lm	SMR1G2-9274018N-WC
						50°	2600lm	1700lm	SMR1G2-9275018N-WC
					3000K	20°	2700lm	1900lm	SMR1G2-9302018N-WC
						40°	2700lm	2100lm	SMR1G2-9304018N-WC
						50°	2700lm	1850lm	SMR1G2-9305018N-WC
					4000K	20°	2800lm	2050lm	SMR1G2-9402018N-WC
						40°	2800lm	2300lm	SMR1G2-9404018N-WC
						50°	2800lm	2000lm	SMR1G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	20°	3700lm	2450lm	SMR1G2-9272025N-WC
						40°	3700lm	2700lm	SMR1G2-9274025N-WC
						50°	3700lm	2300lm	SMR1G2-9275025N-WC
					3000K	20°	3800lm	2600lm	SMR1G2-9302025N-WC
						40°	3800lm	2900lm	SMR1G2-9304025N-WC
						50°	3800lm	2500lm	SMR1G2-9305025N-WC
					4000K	20°	3900lm	2800lm	SMR1G2-9402025N-WC
						40°	3900lm	3100lm	SMR1G2-9404025N-WC
						50°	3900lm	2700lm	SMR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SMR1G2-9405025N-WM with Honeycomb
SMR1G2-9405025N-WM-H

Honeycomb

Product Code

SMR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S125S1-G2 – Modular Design Architectural Downlight System




20° 40° 50° Cut-off 40° 2700K 3000K 4000K CRI <90 UGR<19

CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 GUARANTEE 5 YEARS


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

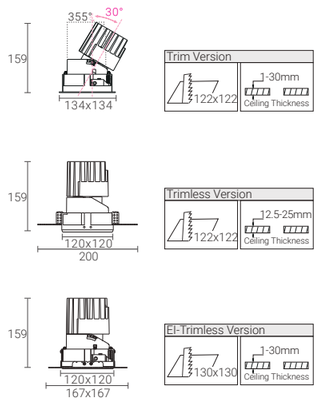

Light Distribution

3000K

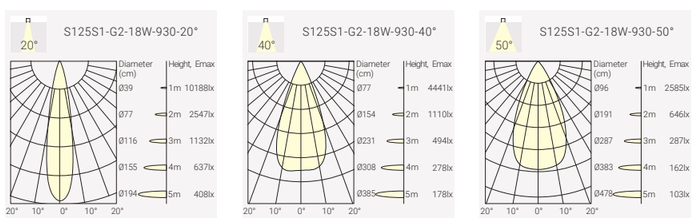

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	20°	2600lm	1800lm	SMS1G2-9272018N-WC
						40°	2600lm	2000lm	SMS1G2-9274018N-WC
						50°	2600lm	1700lm	SMS1G2-9275018N-WC
					3000K	20°	2700lm	1900lm	SMS1G2-9302018N-WC
						40°	2700lm	2100lm	SMS1G2-9304018N-WC
						20°	2700lm	1850lm	SMS1G2-9305018N-WC
					4000K	20°	2800lm	2050lm	SMS1G2-9402018N-WC
						40°	2800lm	2300lm	SMS1G2-9404018N-WC
						50°	2800lm	2000lm	SMS1G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	20°	3700lm	2450lm	SMS1G2-9272025N-WC
						40°	3700lm	2700lm	SMS1G2-9274025N-WC
						50°	3700lm	2300lm	SMS1G2-9275025N-WC
					3000K	20°	3800lm	2600lm	SMS1G2-9302025N-WC
						40°	3800lm	2900lm	SMS1G2-9304025N-WC
						50°	3800lm	2500lm	SMS1G2-9305025N-WC
					4000K	20°	3900lm	2800lm	SMS1G2-9402025N-WC
						40°	3900lm	3100lm	SMS1G2-9404025N-WC
						50°	3900lm	2700lm	SMS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H


Honeycomb


Product Code

SMS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125R2-G2 – Modular Design Architectural Downlight System

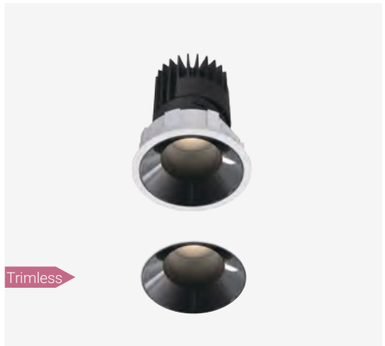

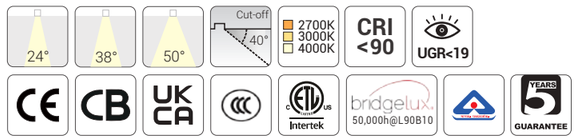


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2750lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

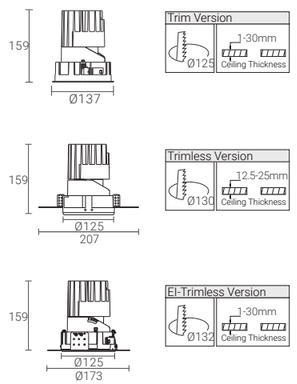

Light Distribution

3000K

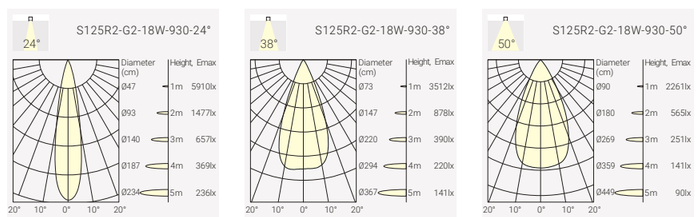

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	24°	2600lm	1600lm	SMR2G2-9272418N-WC
						38°	2600lm	1800lm	SMR2G2-9273818N-WC
						50°	2600lm	1550lm	SMR2G2-9275018N-WC
					3000K	24°	2700lm	1750lm	SMR2G2-9302418N-WC
						38°	2700lm	1900lm	SMR2G2-9303818N-WC
						20°	2700lm	1700lm	SMR2G2-9305018N-WC
					4000K	24°	2800lm	1850lm	SMR2G2-9404218N-WC
						38°	2800lm	2050lm	SMR2G2-9403818N-WC
						50°	2800lm	1800lm	SMR2G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	24°	3700lm	2200lm	SMR2G2-9272425N-WC
						38°	3700lm	2400lm	SMR2G2-9273825N-WC
						50°	3700lm	2100lm	SMR2G2-9275025N-WC
					3000K	24°	3800lm	2350lm	SMR2G2-9302425N-WC
						38°	3800lm	2550lm	SMR2G2-9303825N-WC
						50°	3800lm	2300lm	SMR2G2-9305025N-WC
					4000K	24°	3900lm	2500lm	SMR2G2-9402425N-WC
						38°	3900lm	2750lm	SMR2G2-9403825N-WC
						50°	3900lm	2450lm	SMR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMR2G2-9405025N-WM with Honeycomb
SMR2G2-9405025N-WM-H


Product Code

SMR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125S2-G2 – Modular Design Architectural Downlight System



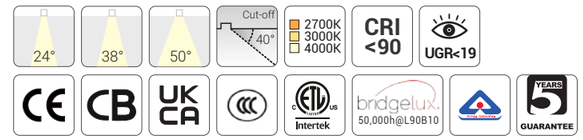


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2750lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

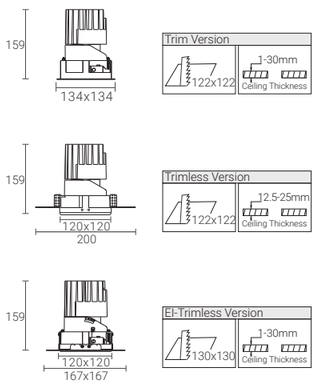

Light Distribution

3000K

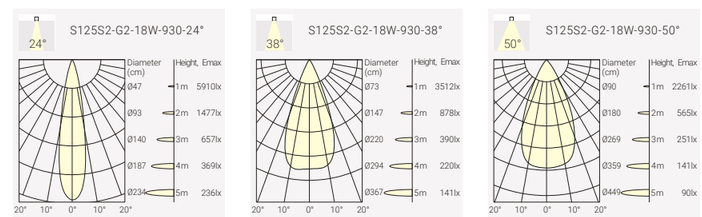

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	24°	2600lm	1600lm	SMS2G2-9272418N-WC
						38°	2600lm	1800lm	SMS2G2-9273818N-WC
						50°	2600lm	1550lm	SMS2G2-9275018N-WC
					3000K	24°	2700lm	1750lm	SMS2G2-9302418N-WC
						38°	2700lm	1900lm	SMS2G2-9303818N-WC
						20°	2700lm	1700lm	SMS2G2-9305018N-WC
					4000K	24°	2800lm	1850lm	SMS2G2-9404218N-WC
						38°	2800lm	2050lm	SMS2G2-9403818N-WC
						50°	2500lm	1800lm	SMS2G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	24°	3700lm	2200lm	SMS2G2-9272425N-WC
						38°	3700lm	2400lm	SMS2G2-9273825N-WC
						50°	3700lm	2100lm	SMS2G2-9275025N-WC
					3000K	24°	3800lm	2350lm	SMS2G2-9302425N-WC
						38°	3800lm	2550lm	SMS2G2-9303825N-WC
						50°	3800lm	2300lm	SMS2G2-9305025N-WC
					4000K	24°	3900lm	2500lm	SMS2G2-9402425N-WC
						38°	3900lm	2750lm	SMS2G2-9403825N-WC
						50°	3900lm	2450lm	SMS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMS2G2-9405025N-WM with Honeycomb
SMS2G2-9405025N-WM-H

Product Code

SMS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE G2 – Modular Design Architectural Downlight System

Project: InterContinental Hotels & Resorts, Hefei, China




SENSE S150R1-G2 – Modular Design Architectural Downlight System



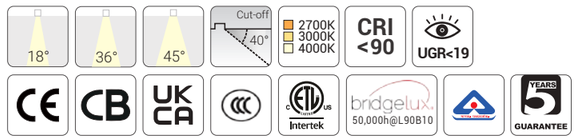


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 4700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: No Driver, On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

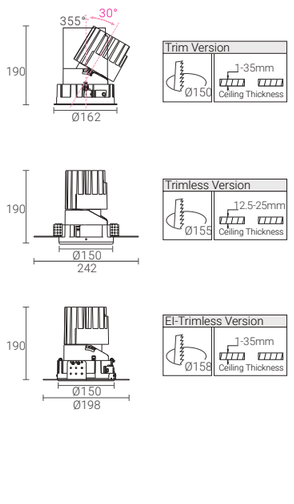

Light Distribution

3000K

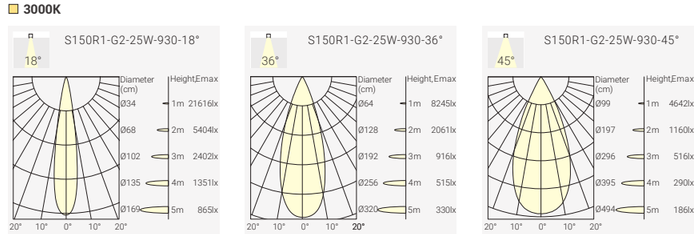

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	2800lm	SLR1G2-9271825N-WC
						36°	3700lm	3000lm	SLR1G2-9273625N-WC
						45°	3700lm	3000lm	SLR1G2-9274525N-WC
					3000K	18°	3800lm	2900lm	SLR1G2-9301825N-WC
						36°	3800lm	3100lm	SLR1G2-9303625N-WC
						45°	3800lm	3100lm	SLR1G2-9304525N-WC
					4000K	18°	3900lm	3000lm	SLR1G2-9401825N-WC
						36°	3900lm	3200lm	SLR1G2-9403625N-WC
						45°	3900lm	3200lm	SLR1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	5500lm	4100lm	SLR1G2-9271838N-WC
						36°	5500lm	4400lm	SLR1G2-9273638N-WC
						45°	5500lm	4400lm	SLR1G2-9274538N-WC
					3000K	18°	5700lm	4200lm	SLR1G2-9301838N-WC
						36°	5700lm	4500lm	SLR1G2-9303638N-WC
						45°	5700lm	4500lm	SLR1G2-9304538N-WC
					4000K	18°	5900lm	4400lm	SLR1G2-9401838N-WC
						36°	5900lm	4700lm	SLR1G2-9403638N-WC
						45°	5900lm	4700lm	SLR1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SLR1G2-9404525N-WM with Honeycomb
SLR1G2-9404525N-WM-H

Honeycomb


Product Code

SLR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR5G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELR1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150S1-G2 – Modular Design Architectural Downlight System



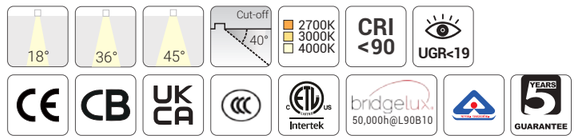


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 4700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

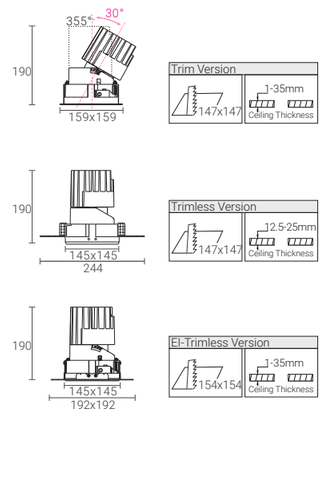

Light Distribution

3000K

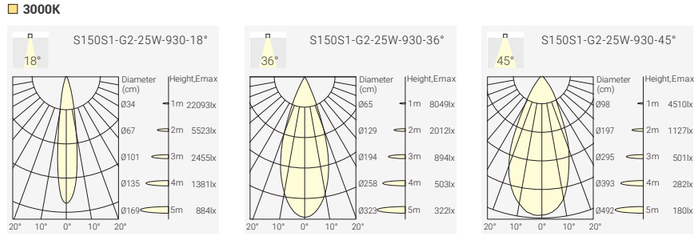

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	2800lm	SLS1G2-9271825N-WC
						36°	3700lm	3000lm	SLS1G2-9273625N-WC
						45°	3700lm	3000lm	SLS1G2-9274525N-WC
					3000K	18°	3800lm	2900lm	SLS1G2-9301825N-WC
						36°	3800lm	3100lm	SLS1G2-9303625N-WC
						45°	3800lm	3100lm	SLS1G2-9304525N-WC
					4000K	18°	3900lm	3000lm	SLS1G2-9401825N-WC
						36°	3900lm	3200lm	SLS1G2-9403625N-WC
						45°	3900lm	3200lm	SLS1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	5500lm	4100lm	SLS1G2-9271838N-WC
						36°	5500lm	4400lm	SLS1G2-9273638N-WC
						45°	5500lm	4400lm	SLS1G2-9274538N-WC
					3000K	18°	5700lm	4200lm	SLS1G2-9301838N-WC
						36°	5700lm	4500lm	SLS1G2-9303638N-WC
						45°	5700lm	4500lm	SLS1G2-9304538N-WC
					4000K	18°	5900lm	4400lm	SLS1G2-9401838N-WC
						36°	5900lm	4700lm	SLS1G2-9403638N-WC
						45°	5900lm	4700lm	SLS1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SLS1G2-9404525N-WM with Honeycomb
SLS1G2-940525N-WM-H

Honeycomb


Product Code

SLS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS4G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELS1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150R2-G2 – Modular Design Architectural Downlight System



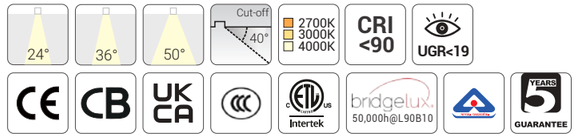


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 4300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

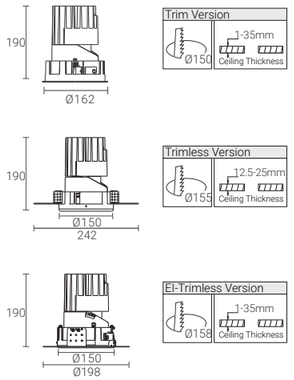

Light Distribution

■ **3000K**

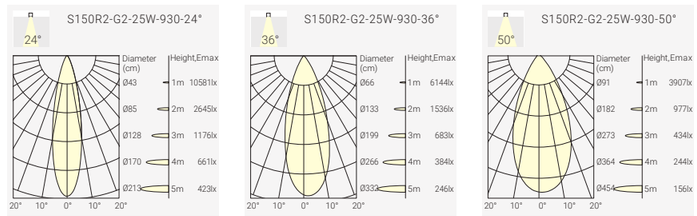

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	24°	3700lm	2500lm	SLR2G2-9272425N-WC
						36°	3700lm	2700lm	SLR2G2-9273625N-WC
						50°	3700lm	2700lm	SLR2G2-9275025N-WC
					3000K	24°	3800lm	2600lm	SLR2G2-9302425N-WC
						36°	3800lm	2800lm	SLR2G2-9303625N-WC
						50°	3800lm	2800lm	SLR2G2-9305025N-WC
					4000K	24°	3900lm	2700lm	SLR2G2-9402425N-WC
						36°	3900lm	2900lm	SLR2G2-9403625N-WC
						50°	3900lm	2900lm	SLR2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	5500lm	3700lm	SLR2G2-9272438N-WC
						36°	5500lm	4000lm	SLR2G2-9273638N-WC
						50°	5500lm	3900lm	SLR2G2-9275038N-WC
					3000K	24°	5700lm	3800lm	SLR2G2-9302438N-WC
						36°	5700lm	4100lm	SLR2G2-9303638N-WC
						50°	5700lm	4050lm	SLR2G2-9305038N-WC
					4000K	24°	5900lm	4000lm	SLR2G2-9402438N-WC
						36°	5900lm	4300lm	SLR2G2-9403638N-WC
						50°	5900lm	4200lm	SLR2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SLR2G2-9405025N-WM with Honeycomb
SLR2G2-9405025N-WM-H

Honeycomb


Product Code

SLR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELR2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150S2-G2 – Modular Design Architectural Downlight System



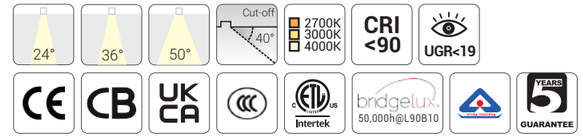


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 4300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

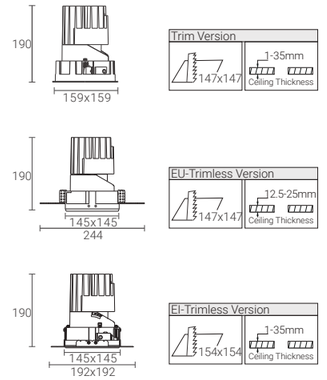

Light Distribution

■ **3000K**

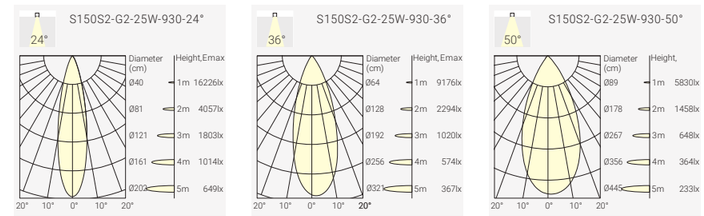

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	24°	3700lm	2400lm	SLS2G2-9272425N-WC
						36°	3700lm	2600lm	SLS2G2-9273625N-WC
						50°	3700lm	2600lm	SLS2G2-9275025N-WC
					3000K	24°	3800lm	2500lm	SLS2G2-9302425N-WC
						36°	3800lm	2700lm	SLS2G2-9303625N-WC
						50°	3800lm	2700lm	SLS2G2-9305025N-WC
					4000K	24°	3900lm	2600lm	SLS2G2-9402425N-WC
						36°	3900lm	2800lm	SLS2G2-9403625N-WC
						50°	3900lm	2800lm	SLS2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	5500lm	3700lm	SLS2G2-9272438N-WC
						36°	5500lm	4000lm	SLS2G2-9273638N-WC
						50°	5500lm	3900lm	SLS2G2-9275038N-WC
					3000K	24°	5700lm	3800lm	SLS2G2-9302438N-WC
						36°	5700lm	4100lm	SLS2G2-9303638N-WC
						50°	5700lm	4050lm	SLS2G2-9305038N-WC
					4000K	24°	5900lm	4000lm	SLS2G2-9402438N-WC
						36°	5900lm	4300lm	SLS2G2-9403638N-WC
						50°	5900lm	4200lm	SLS2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-940525N-WM-H

Honeycomb

Product Code

SLS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**24** 24W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELS2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE
New Wall Washer


Excellent glare control
Uniform illumination across the wall
Reflector available with specular




New

SENSE W75 & W100

The new technology of wall washer downlight is now part of the SENSE 2.0
Ceiling cutouts in both Ø75mm and Ø100mm sizes, offering diferent power and output options to meet diverse wall washing requirements across varying wall heights.
Excellent glare control and uniform illumination across the wall.
Reflector available in specular.




SENSE W75

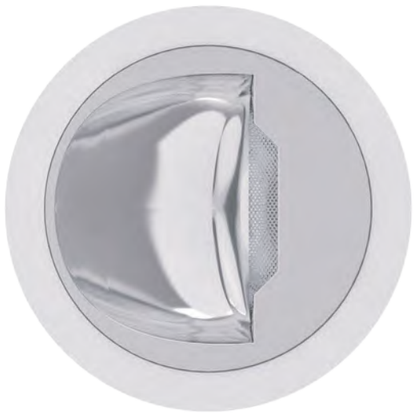

SENSE W100

Wall Washer

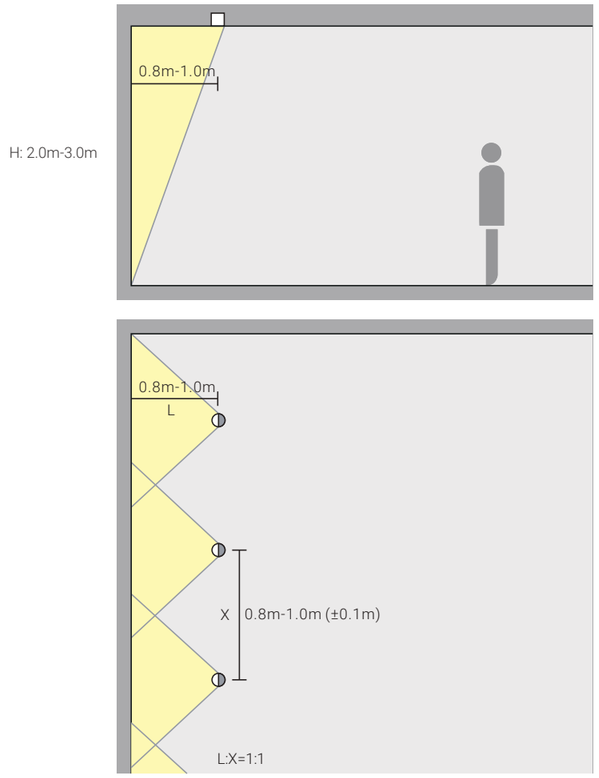




SENSE W75 – The New Technology of Wall Washer Downlight




Wall Washer | 2700K 3000K 4000K | CRI >90 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø75mm
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: Wall Washer
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W75 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	Wall Washer	1400lm	950lm	S3RW-927WW13N-WS
					3000K	Wall Washer	1500lm	1000lm	S3RW-930WW13N-WS
					4000K	Wall Washer	1600lm	1050lm	S3RW-940WW13N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Reflector Options



Specular

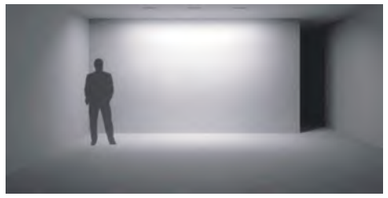

Coding

S3RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S3RW SENSE W75	**927** CRI>90/ 2700K	**WW** Wall Washer	**13** 13W	**N** No Driver	**W** White	**S** Specular	
	930 CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


SENSE W100 – The New Technology of Wall Washer Downlight




Wall Washer | 2700K 3000K 4000K | CRI >90 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: Wall Washer
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W100 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	20W	35V	500mA	90	2700K	Wall Washer	2600lm	1550lm	S4RW-927WW17N-WS
					3000K	Wall Washer	2700lm	1600lm	S4RW-930WW17N-WS
					4000K	Wall Washer	2800lm	1650lm	S4RW-940WW17N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Reflector Options



Specular

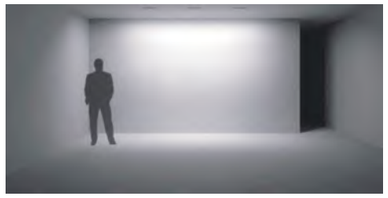

Coding

S4RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S4RW SENSE W100	**927** CRI>90/ 2700K	**WW** Wall Washer	**17** 17W	**N** No Driver	**W** White	**S** Specular	
	930 CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


TAKEO


The Interchangeable Design
Fixed Downlight Series
Round & Square
High Efficiency
UGR<19
IP54



Project: Mist Hot Spring Hotel Xuchang, China


TAKEO – High Efficiency Fixed Downlight

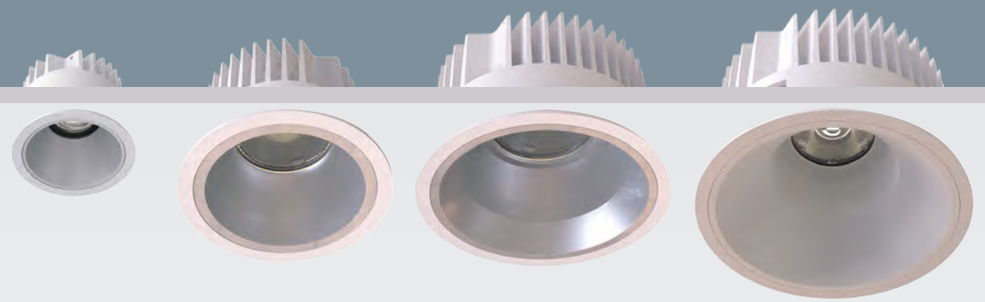



3``

TAKEO T75
7.5W 750lm-870lm
11W 1100lm-1250lm



4``

TAKEO T100 Pro
8.5W 900lm-1200lm
12W 1250lm-1500lm
17W 1700lm-2200lm




6``

TAKEO T150 Pro
17W 1850lm-2350lm
24W 2400lm-3100lm



8``


TAKEO T200 Pro
24W 2300lm-3350lm
36W 3800lm-5000lm

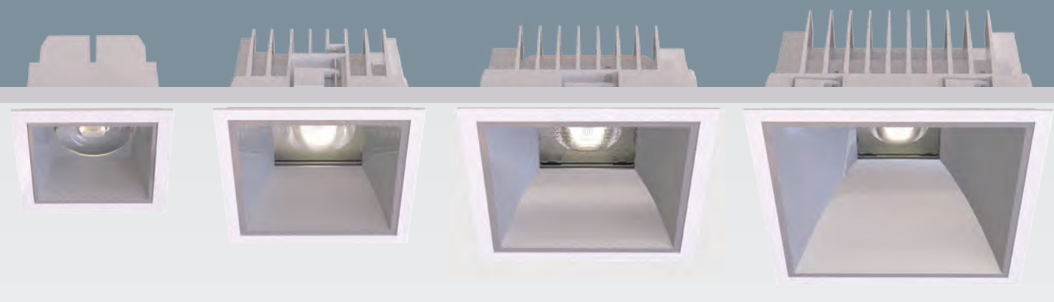




3``

TAKEO TS68
7.5W 770lm-820lm
11W 1150lm-1250lm



4``

TAKEO TS100 Pro
8.5W 900lm-1000lm
12W 1200lm-1300lm



6``

TAKEO TS150 Pro
17W 1700lm-1850lm
24W 2250lm-2400lm



8``

TAKEO TS200 Pro
24W 2300lm-2500lm
36W 3400lm-3650lm



White



Black



White



Black

TAKEO – High Efficiency Fixed Downlight

Project: FIX4 Office, Saasveld, Netherlands







Project: Les Maçons Parisiens, Massy, France




Project: Malaysia International Exhibition Convention Centre, Malaysia



TAKEO T75 – High Efficiency Fixed Downlight







Quick Info

- Ceiling Cut-out: Ø75mm
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 25°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Trim Finsh



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T75 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	200mA	90	2700K	25°	1000lm	750lm	TT1-9272509N-WM
						50°	1000lm	800lm	TT1-9275009N-WM
					3000K	25°	1100lm	770lm	TT1-9302509N-WM
						50°	1100lm	850lm	TT1-9305009N-WM
					4000K	25°	1200lm	800lm	TT1-9402509N-WM
						50°	1200lm	870lm	TT1-9405009N-WM
11W	13W	34V	300mA	90	2700K	25°	1500lm	1100lm	TT2-9272511N-WM
						50°	1500lm	1150lm	TT2-9275011N-WM
					3000K	25°	1600lm	1150lm	TT2-9302511N-WM
						50°	1600lm	1200lm	TT2-9305011N-WM
					4000K	25°	1700lm	1200lm	TT2-9402511N-WM
						50°	1700lm	1250lm	TT2-9405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding


TT1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TT1 T75-7.5W	**927** CRI>90/ 2700K	**25** 25°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
TT2 T75-11W	**930** CRI>90/ 3000K	**50** 50°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			



TAKEO T100 Pro – High Efficiency Fixed Downlight





30° 50° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19


IP54 CE CB UKCA ETL intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT®

Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 8.5W, 12W, 17W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

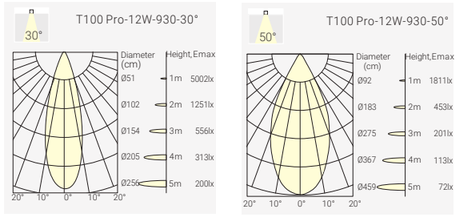

Trim Finsh



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	30°	1200lm	1100lm	TS4-9272009N-WM
						50°	1200lm	900lm	TS4-9274009N-WM
					3000K	30°	1300lm	1150lm	TS4-9302009N-WM
						50°	1300lm	950lm	TS4-9305009N-WM
					4000K	30°	1400lm	1200lm	TS4-9402009N-WM
						50°	1400lm	1000lm	TS4-9404009N-WM
12W	14W	34V	350mA	90	2700K	30°	1700lm	1400lm	TS4-9272012N-WM
						50°	1700lm	1250lm	TS4-9274012N-WM
					3000K	30°	1800lm	1450lm	TS4-9302012N-WM
						50°	1800lm	1300lm	TS4-9304012N-WM
					4000K	30°	1900lm	1500lm	TS4-9402012N-WM
						50°	1900lm	1350lm	TS4-9404012N-WM
17W	20W	35V	500mA	90	2700K	30°	2400lm	2000lm	TS4-9272017N-WM
						50°	2400lm	1700lm	TS4-9274017N-WM
					3000K	30°	2500lm	2100lm	TS4-9302017N-WM
						50°	2500lm	1800lm	TS4-9304017N-WM
					4000K	30°	2600lm	2200lm	TS4-9402017N-WM
						50°	2600lm	1850lm	TS4-9404017N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

TS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TS4 TAKEO T100 Pro	**927** CRI>90/ 2700K	**30** 30°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**50** 50°	**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K		**17** 17W	**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			




TAKEO T100-DW – High Efficiency Fixed Downlight



50° | Cut-off 35° | 1800K 3000K Dim to Warm | CRI <95 | UGR<19 | IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 50°
- Lumen Output: Up to Max.1000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim , Casambi Wireless Dim



Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO T100-DW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	50°	Max.1000lm	TS2-9D35012N-WM

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



Reflector Options



White Matt Black

Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
TS2 TAKEO T100-DW		9D3 CRI>95 1800K-3000K	50 50°	12 12W	N No Driver P Phase Dim A 0-10V Dim D DALI Dim		W White B Black	B Black M Matt W White		


TAKEO T100-TW – High Efficiency Fixed Downlight



50° | Cut-off 35° | 2700K 6500K Tunable White | CRI <90 | UGR<19 | IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 13W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim



Light Distribution

3000K

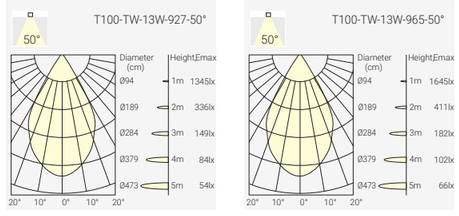

Trim Finsh



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T100-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13W	15W	36V	350mA	90	2700K-6500k	50°	Max.900lm	TS2-9TW5013N-WM
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	


Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
TS2 TAKEO T100-TW		9TW CRI>90 2700K-6500K	50 50°	13 13W	N No Driver D DALI DT8 Dim		W White B Black	B Black M Matt W White		


TAKEO T150 Pro – High Efficiency Fixed Downlight



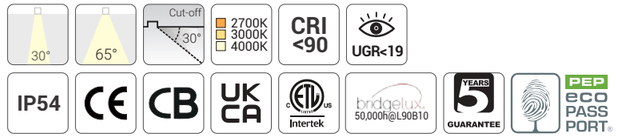


Quick Info

- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 17W, 24W, CRI>90, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30°, 65°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

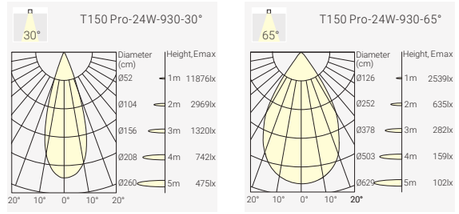

Trim Finsh



White Black

Order Info (TAKEO T150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	30°	2600lm	2200lm	TM4-9273017N-WM
						65°	2600lm	1850lm	TM4-9276517N-WM
					3000K	30°	2700lm	2300lm	TM4-9303017N-WM
						65°	2700lm	1900lm	TM4-9306517N-WM
					4000K	30°	2800lm	2350lm	TM4-9403017N-WM
						65°	2800lm	2000lm	TM4-9406517N-WM
24W	26W	35V	700mA	90	2700K	30°	3700lm	2900lm	TM4-9273024N-WM
						65°	3700lm	2400lm	TM4-9276524N-WM
					3000K	30°	3800lm	3000lm	TM4-9303024N-WM
						65°	3800lm	2500lm	TM4-9306524N-WM
					4000K	30°	3900lm	3100lm	TM4-9403024N-WM
						65°	3900lm	2600lm	TM4-9406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TM4	–	***	**	**	*	–	*	*	–	*
MODEL		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TM4 TAKEO T150 Pro		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	30 30° 65 65°	17 17W 24 24W	N No Driver F On-Off P Phase Dim A 0-10V Dim D DALI Dim		W White B Black	B Black M Matt W White		


TAKEO T150-TW – High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim



Light Distribution

3000K

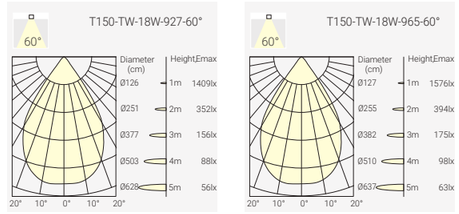

Trim Finsh



White Black

Order Info (TAKEO T150-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18W	21W	36V	500mA	90	2700K-6500k	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black

Coding

TM1	_	***	**	**	*	_	*	*	_	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TM1 TAKEO T150-18W TM2 TAKEO T150-25W		9TW CRI>90 2700K-6500K	60 60°	18 18W 25 25W	N No Driver D DALI DT8 Dim		W White B Black	B Black M Matt W White		

TAKEO T200 Pro – High Efficiency Fixed Downlight





18° 30° 65° | Cut-off 35° | 2700K 3000K 4000K | CRI <90 | UGR<19

IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 24W, 36W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 65°
- Lumen Output: Up to 5000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K







Trim Finsh



White Black

Order Info (TAKEO T200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	35V	700mA	90	2700K	18°	3700lm	3100lm	TL4-9271824N-WM
						30°	3700lm	3150lm	TL4-9273024N-WM
						65°	3700lm	2300lm	TL4-9276524N-WM
					3000K	18°	3800lm	3200lm	TL4-9301824N-WM
						30°	3800lm	3250lm	TL4-9303024N-WM
						65°	3800lm	2400lm	TL4-9306524N-WM
					4000K	18°	3900lm	3300lm	TL4-9401824N-WM
						30°	3900lm	3350lm	TL4-9403024N-WM
						65°	3900lm	2450lm	TL4-9406524N-WM
36W	40W	35V	1050mA	90	2700K	18°	5500lm	4700lm	TL4-9271836N-WM
						30°	5500lm	4500lm	TL4-9273036N-WM
						65°	5500lm	3800lm	TL4-9276536N-WM
					3000K	18°	5700lm	4900lm	TL4-9301836N-WM
						30°	5700lm	4700lm	TL4-9303036N-WM
						65°	5700lm	3950lm	TL4-9306536N-WM
					4000K	18°	5900lm	5000lm	TL4-9401836N-WM
						30°	5900lm	4800lm	TL4-9403036N-WM
						65°	5900lm	4050lm	TL4-9406536N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TL4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL4 TAKEO T200 Pro	927 CRI>90/ 2700K	18 18°	24 24W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	30 30°	36 36W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K	65 65°		P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			

TAKEO T200-TW – High Efficiency Fixed Downlight





60° | Cut-off 35° | 2700K 6500K Tunable White | CRI <90 | UGR<19

IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim






Light Distribution

3000K





Trim Finsh



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T200-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Coding

TL1 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL1 TAKEO T200 TW	9TW CRI>90 2700K-6500K	60 60°	25 25W	N No Driver	W White	B Black	
				D DALI DT8 Dim	B Black	M Matt	
						W White	

TAKEO T150C Pro – High Efficiency Fixed Downlight







Quick Info

- Bridgelux LED: 17W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30° , 65°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K





Housing Finsh



White Black

Order Info (TAKEO T150C Pro in White Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	30°	2600lm	2200lm	TMC4-9273017N-WM
						65°	2600lm	1850lm	TMC4-9276517N-WM
					3000K	30°	2700lm	2300lm	TMC4-9303017N-WM
						65°	2700lm	1900lm	TMC4-9306517N-WM
					4000K	30°	2800lm	2350lm	TMC4-9403017N-WM
						65°	2800lm	2000lm	TMC4-9406517N-WM
24W	26W	35V	700mA	90	2700K	30°	3700lm	2900lm	TMC4-9273024N-WM
						65°	3700lm	2400lm	TMC4-9276524N-WM
					3000K	30°	3800lm	3000lm	TMC4-9303024N-WM
						65°	3800lm	2500lm	TMC4-9306524N-WM
					4000K	30°	3900lm	3100lm	TMC4-9403024N-WM
						65°	3900lm	2600lm	TMC4-9406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TMC4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Housing Finish	Reflector Color	Accessory
TMC4 TAKEO T150C Pro	927 CRI>90/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			



Project: JBF Kontorer, Norway

TAKEO – High Efficiency Fixed Downlight

Project: Sparkasse, Hamm, Germany



TAKEO TS68 – High Efficiency Fixed Downlight




25° 60° Cut-off 40° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 68x68mm
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 25°, 60°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K





Trim Finsh



White Black

Order Info (TAKEO TS68 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	200mA	90	2700K	25°	1000lm	770lm	TTS1-9272508N-WM
						60°	1000lm	770lm	TTS1-9276008N-WM
					3000K	25°	1100lm	800lm	TTS1-9302508N-WM
						60°	1100lm	800lm	TTS1-9306008N-WM
					4000K	25°	1200lm	820lm	TTS1-9402508N-WM
						60°	1200lm	820lm	TTS1-9406008N-WM
11W	13W	34V	300mA	90	2700K	25°	1500lm	1150lm	TTS2-9272511N-WM
						60°	1500lm	1150lm	TTS2-9276011N-WM
					3000K	25°	1600lm	1200lm	TTS2-9302511N-WM
						60°	1600lm	1200lm	TTS2-9306011N-WM
					4000K	25°	1700lm	1250lm	TTS2-9402511N-WM
						60°	1700lm	1250lm	TTS2-9406011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TTS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TTS1 TAKEO TS68-7.5W	**927** CRI>90/ 2700K	**25** 25°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
TTS2 TAKEO TS68-11W	**930** CRI>90/ 3000K	**60** 60°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			

TAKEO TS100 Pro – High Efficiency Fixed Downlight




60° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 100x100mm
- Bridgelux LED: 8.5W, 12W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 60°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh



White Black

Reflector Options



White Matt Black

Order Info (TAKEO TS100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	60°	1200lm	900lm	TSS4-9276009N-WM
					3000K	60°	1300lm	950lm	TSS4-9306009N-WM
					4000K	60°	1400lm	1000lm	TSS4-9406009N-WM
12W	14W	34V	350mA	90	2700K	60°	1700lm	1200lm	TSS4-9276012N-WM
					3000K	60°	1800lm	1250lm	TSS4-9306012N-WM
					4000K	60°	1900lm	1300lm	TSS4-9406012N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

TSS4 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSS4 TAKEO TS100 Pro	**927** CRI>90/ 2700K	**60** 60°	**09** 8.5W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K		**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			


TAKEO TS150 Pro – High Efficiency Fixed Downlight



70° | Cut-off 30° | 2700K 3000K 4000K | CRI <90 | UGR<19 | IP54 | CE | CB | UKCA | ETL US Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: 150x150mm
- Bridgelux LED: 17W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 70°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	70°	2600lm	1700lm	TSM4-9277017N-WM
					3000K	70°	2700lm	1800lm	TSM4-9307017N-WM
					4000K	70°	2800lm	1850lm	TSM4-9407017N-WM
24W	26W	35V	700mA	90	2700K	70°	3700lm	2250lm	TSM4-9277024N-WM
					3000K	70°	3800lm	2350lm	TSM4-9307024N-WM
					4000K	70°	3900lm	2400lm	TSM4-9407024N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TSM4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSSM4 TAKEO TS150 Pro	927 CRI>90/ 2700K	70 70°	17 17W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K		24 24W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			


TAKEO TS200 Pro – High Efficiency Fixed Downlight



70° | Cut-off 35° | 2700K 3000K 4000K | CRI <90 | UGR<19 | IP54 | CE | CB | UKCA | ETL US Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: 200x200mm
- Bridgelux LED: 24W, 36W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 70°
- Lumen Output: Up to 3650lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	35V	700mA	90	2700K	70°	3700lm	2300lm	TSL4-9277024N-WM
					3000K	70°	3800lm	2400lm	TSL4-9307024N-WM
					4000K	70°	3900lm	2500lm	TSL4-9407024N-WM
36W	40W	35V	1050mA	90	2700K	70°	5500lm	3400lm	TSL4-9277036N-WM
					3000K	70°	5700lm	3550lm	TSL4-9307036N-WM
					4000K	70°	5900lm	3650lm	TSL4-9407036N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TSL4 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSL4 TAKEO TS200 Pro	927 CRI>90/ 2700K	70 70°	24 24W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K		36 36W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			


PASSION

Excellent balance between eye comfort and high efficiency
Light source deep integrated for glare control (UGR<19) with a 30° shielding angle
Beam angle in 60° with opal cover
Single CCT version available in 3000K or 4000K, for high efficiency (up to 140lm/W)
Switchable CCT version in 3000K-3500K-4000K switchable, easier for keeping stock.
IP54 rating, suitable for indoor environments with moderate moisture and dust levels
Product finish in White-Specular(WS). White-Matt(WM), White-White(WW), Black-Black(BB)




PASSION 100 – The High Efficiency Fixed Downlight





Quick Info


- Ceiling Cut-out: Ø100mm
- LED: 8W, 12W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 1750lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

Order Info (PASSION 100 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	3000K	60°	1500lm	1100lm	PAN4-8306008N-WS
					4000K	60°	1600lm	1200lm	PAN4-8406008N-WS
12W	14W	33V	350mA	80	3000K	60°	2100lm	1650lm	PAN4-8306012N-WS
					4000K	60°	2300lm	1750lm	PAN4-8406012N-WS
8W	10W	33V	250mA	80	3000K-3500K-4000K	60°	1500lm	Max.1150lm	PAN4-8S306008N-WS
13W	15W	33V	350mA	80	3000K-3500K-4000K	60°	2100lm	Max.1600lm	PAN4-8S306013N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

PAN4 – *** ** ** * – ** – *


Model	CRI/. CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN4 PASSION 100	**830** CRI>80/ 3000K	**60** 60°	**08** 8W	**N** No Driver	**WS** White-Specular	
	840 CRI>80/ 4000K		**12** 12W	**F** On-Off	**WM** White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			**P** Phase Dim	**WW** White-White	
	930 CRI>90/ 3000K			**A** 0-10V Dim	**BB** Black-Black	
	940 CRI>90/ 4000K			**D** DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					



Project: Application Reference


PASSION 150 – The High Efficiency Fixed Downlight




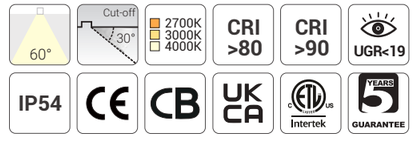

Quick Info

- Ceiling Cut-out: Ø150mm
- LED: 16W, 23W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 3500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular White-Matt White-White Black-Black

Order Info (PASSION 150 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	3000K	60°	3100lm	2450lm	PAN6-8306016N-WS
					4000K	60°	3400lm	2600lm	PAN6-8406016N-WS
23W	25W	33V	700mA	80	3000K	60°	3900lm	3350lm	PAN6-8306023N-WS
					4000K	60°	4200lm	3500lm	PAN6-8406023N-WS
18W	20W	33V	500mA	80	3000K-3500K-4000K	60°	3100lm	Max.2450lm	PAN6-8S306018N-WS
25W	28W	33V	700mA	80	3000K-3500K-4000K	60°	3900lm	Max.3350lm	PAN6-8S306025N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

PAN6 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN6	**830**	**60**	**16**	**N**	**WS**	
PASSION 150	CRI>80/ 3000K	60°	16W	No Driver	White-Specular	
	840		**23**	**F**	**WM**	
	CRI>80/ 4000K		23W	On-Off	White-Matt	
	8S3			**P**	**WW**	
	CRI>80/ 3000K-3500K-4000K			Phase Dim	White-White	
	930			**A**	**BB**	
	CRI>90/ 3000K			0-10V Dim	Black-Black	
	940			**D**		
	CRI>90/ 4000K			DALI Dim		
	9S3					
	CRI>90/ 3000K-3500K-4000K					


PASSION 200 – The High Efficiency Fixed Downlight





Quick Info


- Ceiling Cut-out: Ø175mm-200mm
- LED: 23W, 30W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 4600lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular White-Matt White-White Black-Black

Order Info (PASSION 200 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
23W	25W	33V	700mA	80	3000K	60°	3900lm	3500lm	PAN8-8306023N-WS
					4000K	60°	4200lm	3650lm	PAN8-8406023N-WS
30W	33W	33V	900mA	80	3000K	60°	5000lm	4350lm	PAN8-8306030N-WS
					4000K	60°	5300lm	4600lm	PAN8-8406030N-WS
25W	28W	33V	700mA	80	3000K-3500K-4000K	60°	3900lm	Max.3550lm	PAN8-8S306025N-WS
30W	33W	33V	900mA	80	3000K-3500K-4000K	60°	5000lm	Max.4350lm	PAN8-8S306030N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

PAN8 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN8	**830**	**60**	**23**	**N**	**WS**	
PASSION 200	CRI>80/ 3000K	60°	23W	No Driver	White-Specular	
	840		**30**	**F**	**WM**	
	CRI>80/ 4000K		30W	On-Off	White-Matt	
	8S3			**P**	**WW**	
	CRI>80/ 3000K-3500K-4000K			Phase Dim	White-White	
	930			**A**	**BB**	
	CRI>90/ 3000K			0-10V Dim	Black-Black	
	940			**D**		
	CRI>90/ 4000K			DALI Dim		
	9S3					
	CRI>90/ 3000K-3500K-4000K					

CLUB

Modular Downlight System
Power from 6W to 18W
Round & Square, Trim & Trimless
Various Trims for Different Applications



Project: Le Bellune Paris Hotel, France





Project: Hotel Bellune, Paris, France



Project: Pavilion Damansara, Malaysia

CLUB – Modular Downlight System

Project: The Papolion, Indonesia




Project: Private Residence Schuettorf, Germany



CLUB – M1, M2, M3 & M4 LED Module

- The NEKO M1, M2, M3 & M4 LED Modules is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee

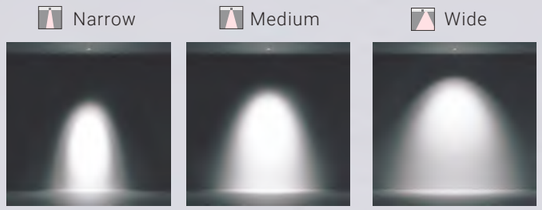

Verschiedene Abstrahlwinkel für architektonische Designs
Three beam angles for various architectural design requirements.



CLUB – M4 Pro Architectural LED Module

- The NEKO M4 Pro LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO M4 Pro LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee



Verschiedene Abstrahlwinkel für architektonische Designs
Five beam angles for various architectural design requirements.









CLUB – M1 LED Module



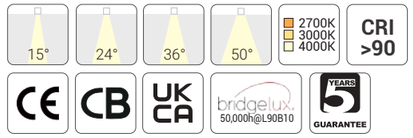


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 6W, 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

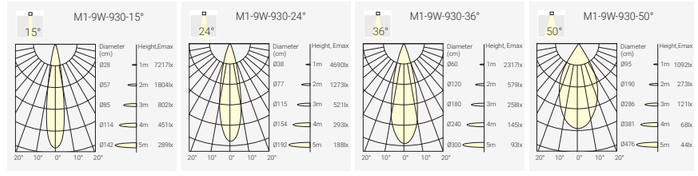


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M1-9271509N-NN
						24°	950lm	800lm	M1-9272409N-NN
						36°	950lm	800lm	M1-9273609N-NN
						50°	950lm	800lm	M1-9275009N-NN
					3000K	15°	1050lm	750lm	M1-9301509N-NN
						24°	1050lm	850lm	M1-9302409N-NN
						36°	1050lm	850lm	M1-9303609N-NN
						50°	1050lm	850lm	M1-9305009N-NN
					4000K	15°	1150lm	800lm	M1-9401509N-NN
						24°	1150lm	950lm	M1-9402409N-NN
						36°	1150lm	950lm	M1-9403609N-NN
						50°	1150lm	950lm	M1-9405009N-NN
6W	8W	36V	180mA	90	2700K	15°	720lm	520lm	M1-9271506N-N N
						24°	720lm	550lm	M1-9272406N-NN
						36°	720lm	550lm	M1-9273606N-NN
						50°	720lm	550lm	M1-9275006N-NN
					3000K	15°	750lm	570lm	M1-9301506N-NN
						24°	750lm	600lm	M1-9302406N-NN
						36°	750lm	600lm	M1-9303606N-NN
						50°	750lm	600lm	M1-9305006N-NN
					4000K	15°	800lm	620lm	M1-9401506N-NN
						24°	800lm	650lm	M1-9402406N-NN
						36°	800lm	650lm	M1-9403606N-NN
						50°	800lm	650lm	M1-9405006N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M2 LED Module



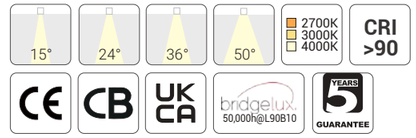


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

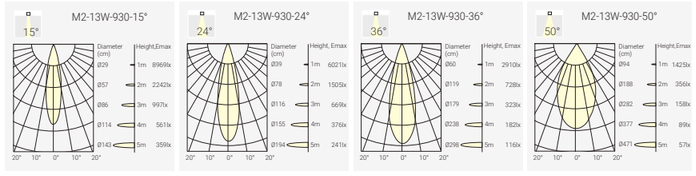


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1300lm	900lm	M2-9271513N-NN
						24°	1300lm	980lm	M2-9272413N-NN
						36°	1300lm	980lm	M2-9273613N-NN
						50°	1300lm	950lm	M2-9275013N-NN
					3000K	15°	1450lm	950lm	M2-9301513N-NN
						24°	1450lm	1150lm	M2-9302413N-NN
						36°	1450lm	1150lm	M2-9303613N-NN
						50°	1450lm	1100lm	M2-9305013N-NN
					4000K	15°	1600lm	1100lm	M2-9401513N-NN
						24°	1600lm	1250lm	M2-9402413N-NN
						36°	1600lm	1250lm	M2-9403613N-NN
						50°	1600lm	1200lm	M2-9405013N-NN
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M2-9271509N-NN
						24°	950lm	800lm	M2-9272409N-NN
						36°	950lm	800lm	M2-9273609N-NN
						50°	950lm	780lm	M2-9275009N-NN
					3000K	15°	1050lm	780lm	M2-9301509N-NN
						24°	1050lm	850lm	M2-9302409N-NN
						36°	1050lm	850lm	M2-9303609N-NN
						50°	1050lm	800lm	M2-9305009N-NN
					4000K	15°	1150lm	850lm	M2-9401509N-NN
						24°	1150lm	950lm	M2-9402409N-NN
						36°	1150lm	950lm	M2-9403609N-NN
						50°	1150lm	900lm	M2-9405009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M3 LED Module



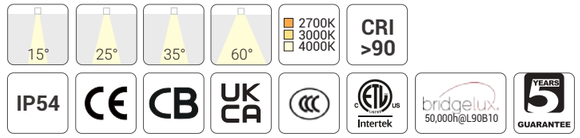


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 25°, 35°, 60°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

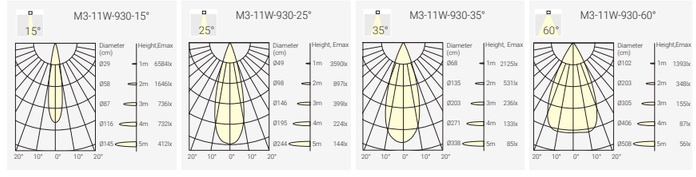

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	34V	300mA	90	2700K	15°	1200lm	1000lm	M3-9271511N-NN
						25°	1200lm	1000lm	M3-9272511N-NN
						35°	1200lm	1050lm	M3-9273511N-NN
						60°	1200lm	1100lm	M3-9276011N-NN
					3000K	15°	1300lm	1050lm	M3-9301511N-NN
						25°	1300lm	1050lm	M3-9302511N-NN
						35°	1300lm	1100lm	M3-9303511N-NN
						60°	1300lm	1150lm	M3-9306011N-NN
					4000K	15	1400lm	1100lm	M3-9401511N-NN
						25°	1400lm	1100lm	M3-9402511N-NN
						35°	1400lm	1150lm	M3-9403511N-NN
						60°	1400lm	1200lm	M3-9406011N-NN
7.5W	9W	33V	200mA	90	2700K	15°	850lm	750lm	M3-9271508N-NN
						25°	850lm	750lm	M3-9272508N-NN
						35°	850lm	780lm	M3-9273508N-NN
						60°	850lm	800lm	M3-9276008N-NN
					3000K	15°	900lm	780lm	M3-9301508N-NN
						25°	900lm	780lm	M3-9302508N-NN
						35°	900lm	800lm	M3-9303508N-NN
						60°	900lm	840lm	M3-9306008N-NN
					4000K	15°	950lm	800lm	M3-9401508N-NN
						25°	950lm	800lm	M3-9402508N-NN
						35°	950lm	840lm	M3-9403508N-NN
						60°	950lm	870lm	M3-9406008N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M3 LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

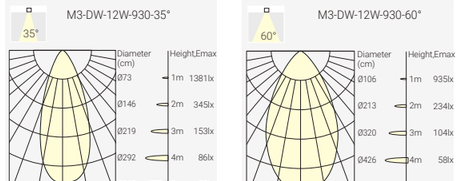

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	35°	1100lm	Max.850lm	M3-9D33512N-NN
						60°	1100lm	Max.850lm	M3-9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)




CLUB – M4 LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 35°, 60°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

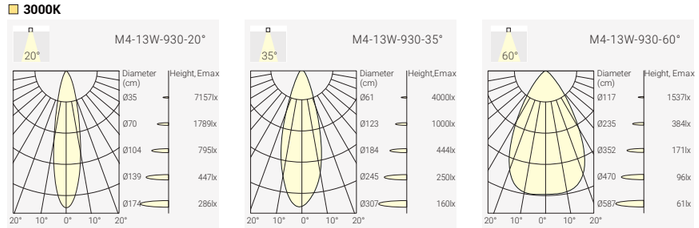

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	M4-9272013N-NN
						35°	1700lm	1550lm	M4-9273513N-NN
						60°	1700lm	1550lm	M4-9276013N-NN
					3000K	20°	1800lm	1550lm	M4-9302013N-NN
						35°	1800lm	1600lm	M4-9303513N-NN
						60°	1800lm	1600lm	M4-9306013N-NN
					4000K	20	1900lm	1600lm	M4-9402013N-NN
						35°	1900lm	1650lm	M4-9403513N-NN
						60°	1900lm	1650lm	M4-9406013N-NN
9W	11W	34V	250mA	90	2700K	20°	1200lm	1100lm	M4-9272009N-NN
						35°	1200lm	1150lm	M4-9273509N-NN
						60°	1200lm	1150lm	M4-9276009N-NN
					3000K	20°	1300lm	1150lm	M4-9302009N-NN
						35°	1300lm	1200lm	M4-9303509N-NN
						60°	1300lm	1200lm	M4-9306009N-NN
					4000K	20°	1400lm	1200lm	M4-9402009N-NN
						35°	1400lm	1250lm	M4-9403509N-NN
						60°	1400lm	1250lm	M4-9406009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M4 LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

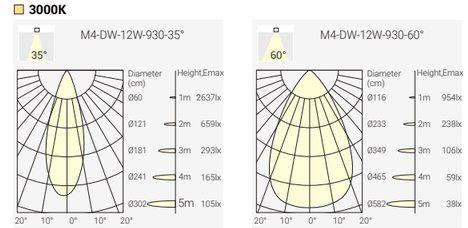

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	35°	1100lm	Max.850lm	M4-9D33512N-NN
						60°	1100lm	Max.850lm	M4-9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module

M4 Pro LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

M4 Pro LED Module



Accessory:



Honeycomb



Diffusion Filter



Linear Spread Filter



Single Asmmetric Filter




Double Asmmetric Filter


CLUB Trim:



Honeycomb Effect



Diffusion Filter Effect




Linear Spread Filter Effect



Single Asymmetric Filter Effect



Double Asymmetric Filter Effect






18° 30° 36° 50° | 2700K 3000K 3500K 4000K | CRI >97

IP54 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 13W, 18W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K
- Beam Angle: 15°/18°, 25°/30° , 35°/36°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

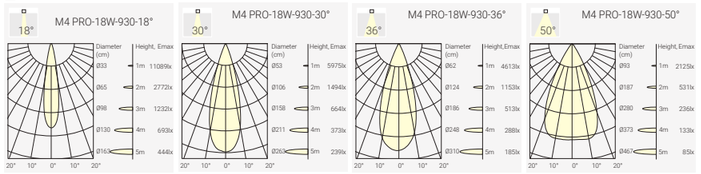

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	97	2700K	15°	1300lm	1050lm	M4P3-0271513N-NN
						25°	1300lm	1050lm	M4P3-0272513N-NN
						35°	1300lm	1050lm	M4P3-0273513N-NN
						50°	1300lm	1000lm	M4P3-0276013N-NN
					3000K	15°	1400lm	1100lm	M4P3-0301513N-NN
						25°	1400lm	1100lm	M4P3-0302513N-NN
						35°	1400lm	1100lm	M4P3-0303513N-NN
						50°	1400lm	1050lm	M4P3-0306013N-NN
					3500K	15°	1450lm	1150lm	M4P3-0351513N-NN
						25°	1450lm	1150lm	M4P3-0352513N-NN
						35°	1450lm	1150lm	M4P3-0353513N-NN
						50°	1450lm	1100lm	M4P3-0356013N-NN
					4000K	15	1500lm	1200lm	M4P3-0401513N-NN
						25°	1500lm	1200lm	M4P3-0402513N-NN
						35°	1500lm	1200lm	M4P3-0403513N-NN
						50°	1500lm	1150lm	M4P3-0406013N-NN
18W	21W	36V	500mA	97	2700K	18°	1900lm	1500lm	M4P4-0271818N-NN
						30°	1900lm	1500lm	M4P4-0273018N-NN
						36°	1900lm	1500lm	M4P4-0273618N-NN
						50°	1900lm	1400lm	M4P4-0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4-0301818N-NN
						30°	2000lm	1600lm	M4P4-0303018N-NN
						36°	2000lm	1600lm	M4P4-0303618N-NN
						50°	2000lm	1500lm	M4P4-0305018N-NN
					3500K	18°	2150lm	1650lm	M4P4-0301818N-NN
						30°	2150lm	1650lm	M4P4-0353018N-NN
						36°	2150lm	1650lm	M4P4-0353618N-NN
						50°	2150lm	1500lm	M4P4-0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4-0401818N-NN
						30°	2200lm	1700lm	M4P4-0403018N-NN
						36°	2200lm	1700lm	M4P4-0403618N-NN
						50°	2200lm	1650lm	M4P4-0405018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)




10° | 2700K 3000K 3500K 4000K | CRI >97

IP54 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K
- Beam Angle: 10°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	97	2700K	10°	650lm	500lm	M4P1-0271007N-NN
					3000K	10°	700lm	550lm	M4P1-0301007N-NN
					3500K	10°	725lm	570lm	M4P1-0351007N-NN
					4000K	10°	750lm	600lm	M4P1-0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

CLUB – M4 Pro Architectural LED Module





38° 50° Dim to Warm CRI >90


IP54 CE CB UKCA Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°, 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	90	1800K-3000K	38°	1100lm	Max.900lm	M4P5-0D33812N-NN
						50°	1100lm	Max.850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module





20° 38° 50° Tunable White CRI >90


IP54 CE CB UKCA Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90,
- CCT: Tunable White 2700K-6500K
- Beam Angle: 20°, 35°, 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: DALI DT8 Dim

Light Distribution

3000K








Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9W	11W	36V	250mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	700lm-850lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13W	15W	36V	350mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

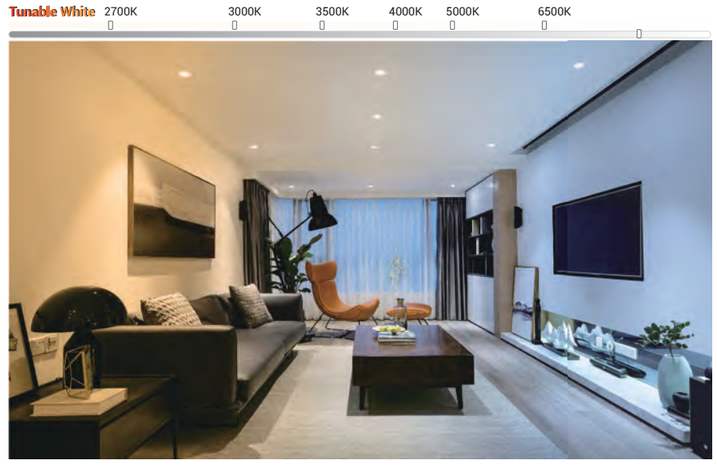

CLUB – Vanity Downlight

New




50° (Asymmetrical) | 3500K 4000K | CRI >97

IP54 | CE | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- CLUB Vanity Downlight
- Bridgelux LED: 9W, CRI>97
- CCT: 3500K, 4000K
- Beam Angle: 50°(Asymmetrical)
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3500K



Trim Finsh



White Black

Reflector Options



Black Dark Light

Optional accessary



Single Asmmetric Filter

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	3500K	50°	1050lm	650lm	CVDR1-0355009N-WC
					4000K	50°	1100lm	700lm	CVDR1-0405009N-WC

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

CVDR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
CVDR1 CLUB Vanity	**035** CRI97/ 3500K **040** CRI97/ 4000K	**50** 50° Asymmetrical	**09** 9W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black **C** Dark Light	Single Asmmetric Filter

CLUB VANITY

Vanity Downlight
Targeted Facial Lighting – CRI 97 for True-to-Life Beauty

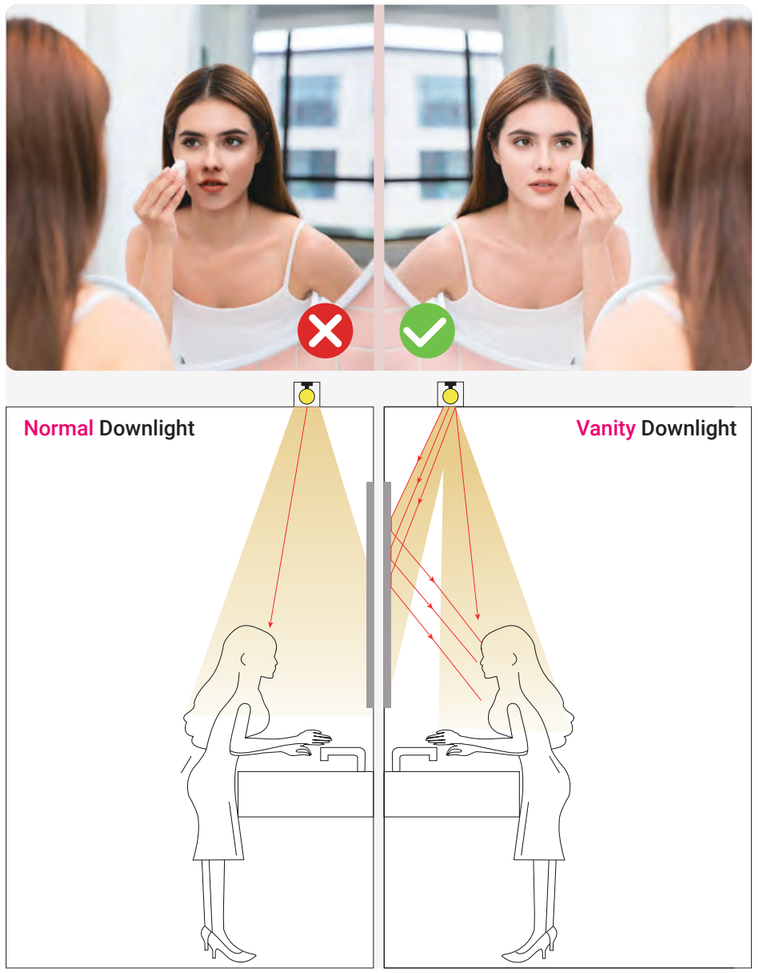

CLUB – Modular Downlight System

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

Module


M1


M2


M3


M4


M4 Pro

Ring




Holding Ring-R


Honeycomb


Linear Spread Filter


Diffusion Filter




Holding Ring-S

Trim

TA Pre-installation Trim




KA-EI Pre-installation Trim




KA Pre-installation Trim




TSA Pre-installation Trim



KSA-EI Pre-installation Trim



KSA Pre-installation Trim



Reflector




Decoration Ring

Decoration Ring Cover


Decoration Ring

Decoration Ring Cover



Decoration Ring

Decoration Ring Cover


TA8


TF5


TRF1-IP44


TA5


TA5-IP65


TA6


TA7


TSF1


TSA1


TSA2


TSA3


KA8-EI


KF5-EI


KRF1-EI-IP44

KA5-EI

KA6-EI

KA7-EI

KSF1-EI

KSA1-EI

KSA2-EI

KSA3-EI

KA8

KF5

KRF1-IP44

KA5

KA6

KA7

KSF1

KSA1

KSA2

KSA3

White
Code: W1 WW

White-Matt
Code: A8 WM

White-White
Code: A8 WW

White-Black
Code: A8 WB

White-Gold
Code: A8 WG

Matt
Code: RF1 MR

White
Code: RF1 WR

Matt
Code: A5 MR

White
Code: A5 WR

Matt
Code: A6 MD

White
Code: A6 WD

Black
Code: A6 BD

Gold
Code: A6 GD

Black
Code: W1 BB

Black-Matt
Code: A8 BM

Black-Black
Code: A8 BB

Black-Gold
Code: A8 BG

Black
Code: RF1 BR

Gold
Code: RF1 GR

Dark Light
Code: RF1 CR

Black
Code: A5 BR

Gold
Code: A5 GR

Black
Code: A6 BDC

White
Code: A6 WDC

Wood
Code: A6 WODC

Marble
Code: A6 MBDC

Matt
Code: F5 MR

White
Code: F5 WR

Gold
Code: F5 GR

Black
Code: F5 BR

Matt
Code: A7 MD

White
Code: A7 WD

Black
Code: A7 BD

Gold
Code: A7 GD

Matt
Code: SA1 MR

White
Code: SA1 WR

Matt
Code: SA2 MD

White
Code: SA2 WD

Black
Code: SA2 BD

Gold
Code: SA2 GD

White-Matt
Code: SA3 WM

White-White
Code: SA3 WW

White-Black
Code: SA3 WB

White-Gold
Code: SA3 WG

Black
Code: A7 BDC

White
Code: A7 WDC

Wood
Code: A7 WODC

Marble
Code: A7 MBDC

Black
Code: SA1 BR

Gold
Code: SA1 GR

Black
Code: SA2 BDC

White
Code: SA2 WDC

Wood
Code: SA2 WODC

Marble
Code: SA2 MBDC

Black-Matt
Code: SA3 BM

Black-Black
Code: SA3 BB

Black-Gold
Code: SA3 BG

Matt
Code: SF1 MS

White
Code: SF1 WS

Gold
Code: SF1 GR


Black
Code: SF1 BS

CLUB – Modular Downlight System


Module



Ring

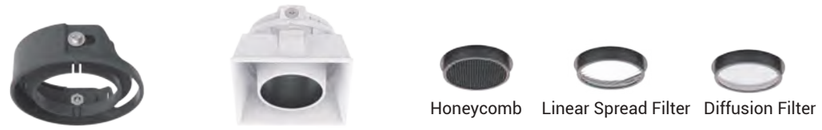

Trim

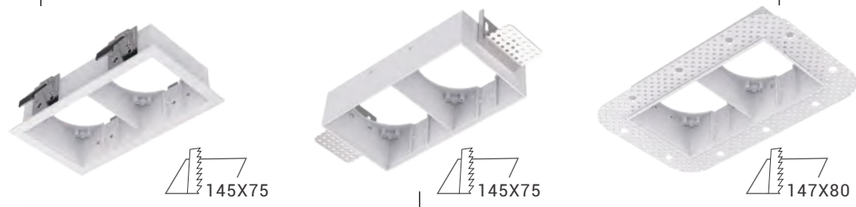

Reflector

Decoration Ring





TSA1D



TSA2D



TSA3D



KSA1D-EI



KSA2D-EI



KSA3D-EI



KSA1D



KSA2D




KSA3D







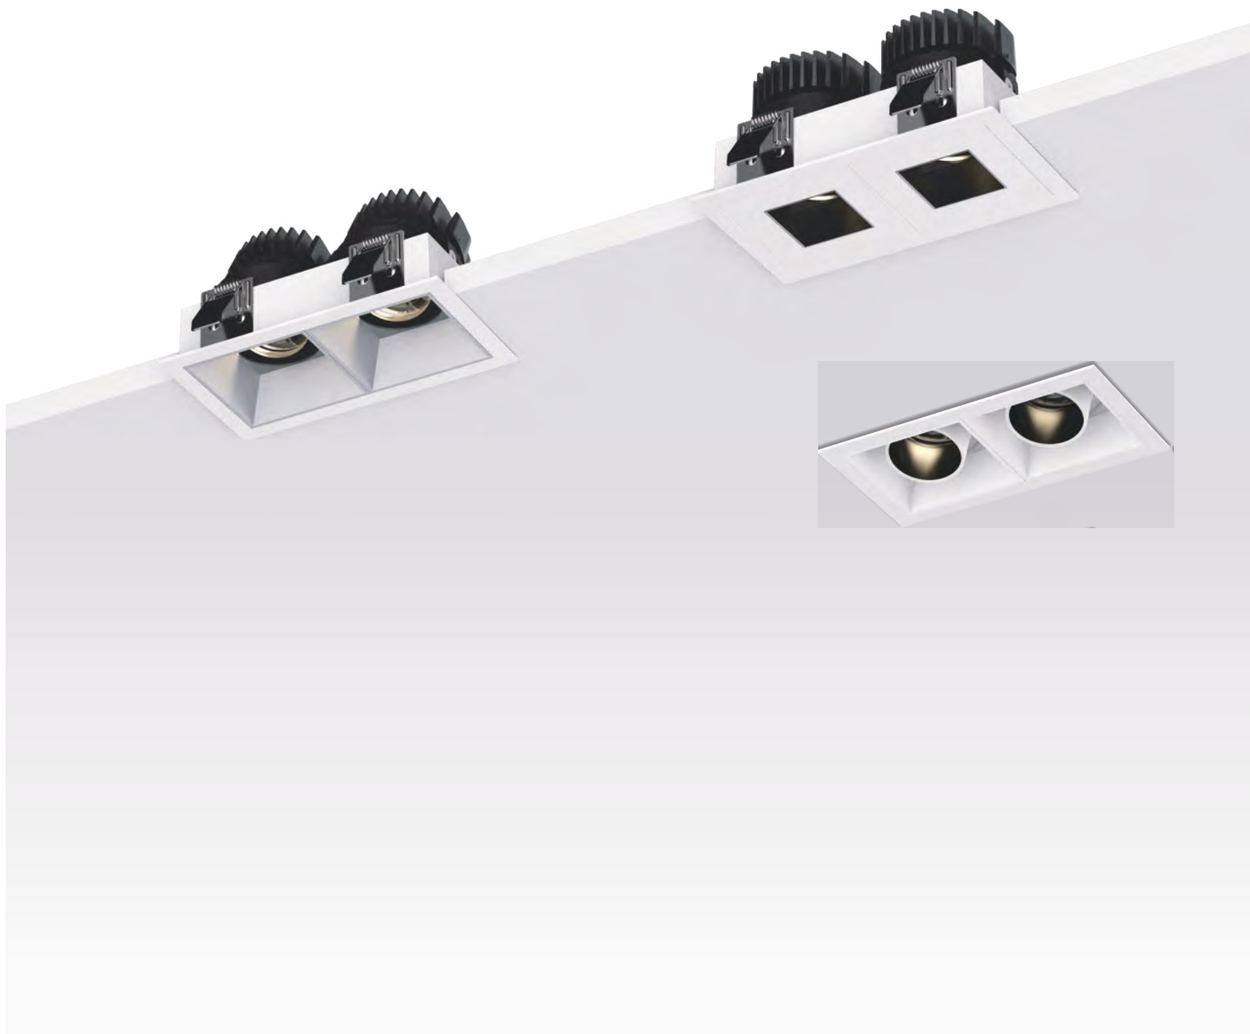



TF5 TA5 TA6 TA7 TA8




TSF1 TSA1 TSA2 TSA3






TSA1D

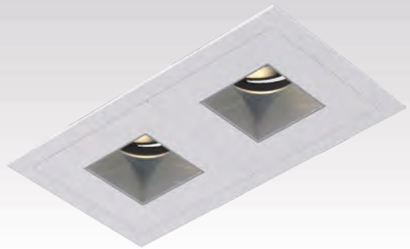



TSA2D

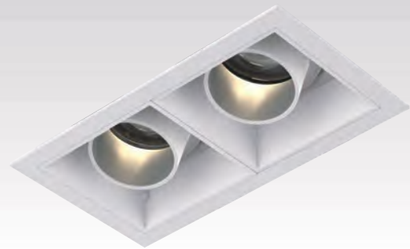



TSA3D





Silicone Gasket






Matt White Black Gold

New TF5









Clear Diffuser
Silicone Gasket


Matt
White
Black
Gold
Dark Light

TRF1-IP44





49
Ø85
75


Matt
White
Black
Gold
Frosted Glass
Silicone Gasket
ALUMINIUM COVER

TA5-IP65




54
Ø90


75






Silicone Gasket




TSF1



Matt White Black Gold

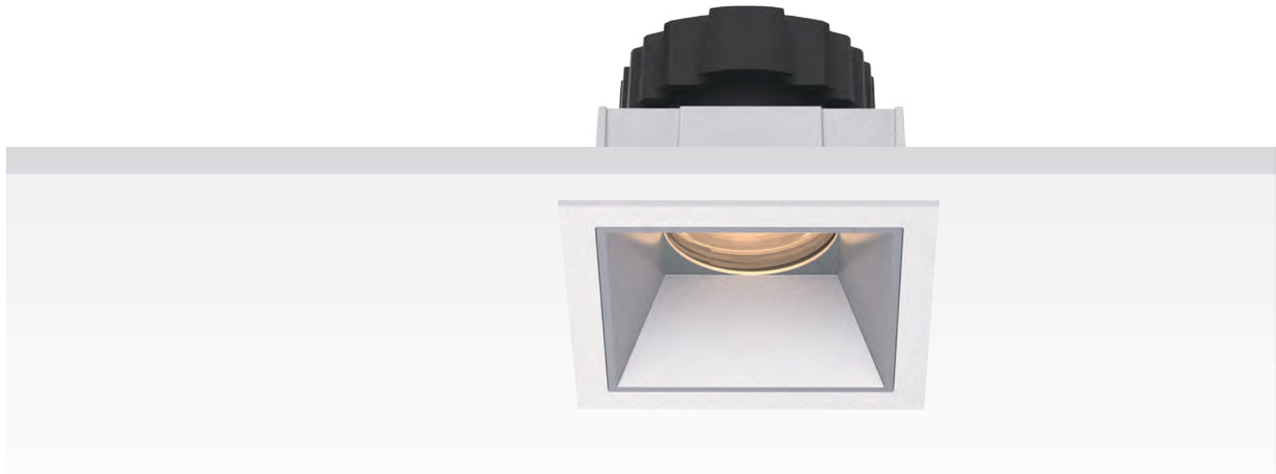









TSA1-IP44




Matt White Black Gold







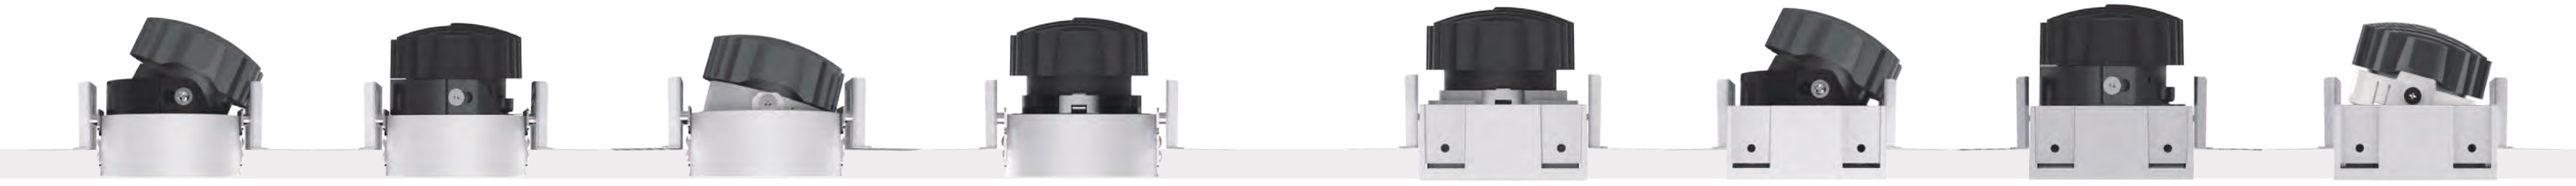



KA5




KA6



KA8



KF5




KSF1



KSA1



KSA2



KSA3



KA7



KSA1D-EI





KSA2D-EI





KSA3D-EI


Installation Trimless Trims










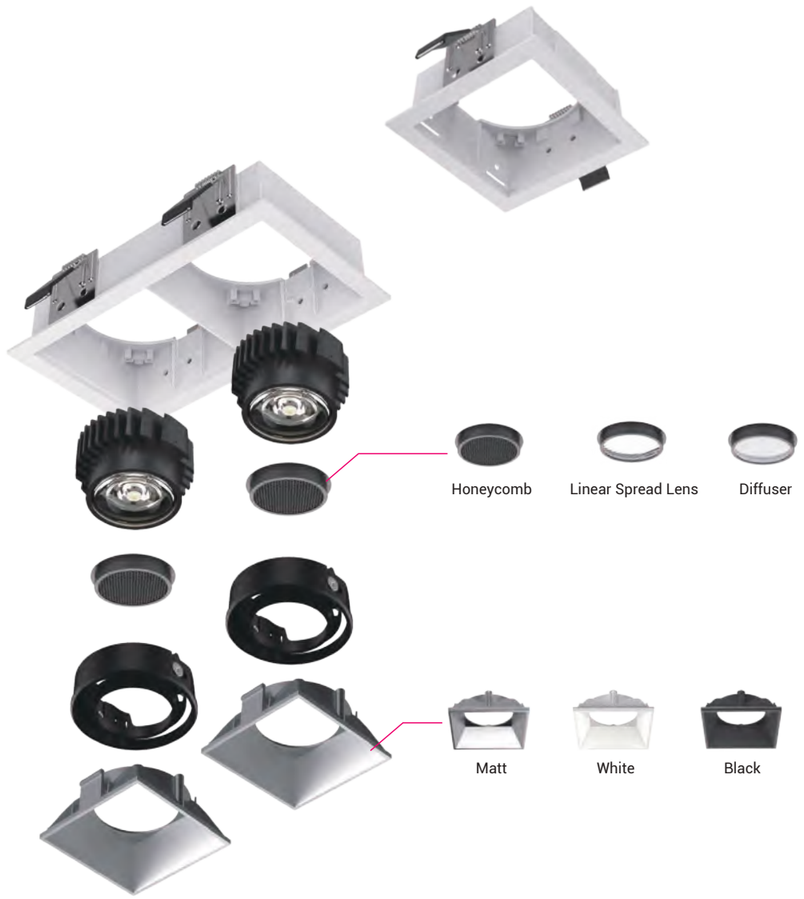


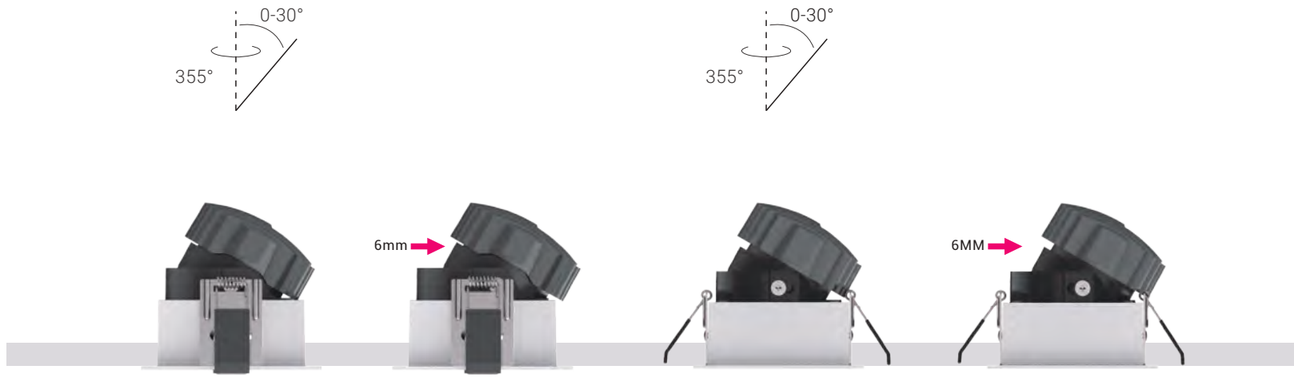




TSA1

TSA1D



75X75



145X75

TA5

75° | 355° | 30° | UK CA | CE





M3+TA5



M4+TA5



M4 PRO+TA5

TA6

75° | UK CA | CE





M3+TA6



M4+TA6



M4 PRO+TA6

KA5-EI

75° | 355° | 30° | UK CA | CE





M3+KA5-EI



M4+KA5-EI



M4 PRO+KA5-EI

KA6-EI

75° | UK CA | CE





M3+KA6-EI



M4+KA6-EI



M4 PRO+KA6-EI

KA5

75° | 355° | 30° | UK CA | CE





M3+KA5



M4+KA5



M4 PRO+KA5

KA6

75° | UK CA | CE





M3+KA6



M4+KA6



M4 PRO+KA6

TA7

75° | UK CA | CE





M3+TA7



M4+TA7



M4 PRO+TA7

TA8

75° | 355° | 18° | UK CA | CE





M3+TA8



M4+TA8



M4 PRO+TA8

KA7-EI

75° | UK CA | CE





M3+KA7-EI



M4+KA7-EI



M4 PRO+KA7-EI

KA8-EI

75° | 355° | 18° | UK CA | CE





M3+KA8-EI



M4+KA8-EI



M4 PRO+KA8-EI

KA7

75° | UK CA | CE





M3+KA7



M4+KA7



M4 PRO+KA7

KA8

75° | 355° | 18° | UK CA | CE





M3+KA8



M4+KA8



M4 PRO+KA8

TF5




M3+TF5




M4+TF5




M4 PRO+TF5



TRF1/ TRF1-IP44




M3+TRF1-IP44




M4+TRF1-IP44




M4 PRO+TRF1-IP44



TA5-IP65




M3+TA5-IP65




M4+TA5-IP65




M4 PRO+TA5-IP65



KF5-EI




M3+KF5-EI




M4+KF5-EI




M4 PRO+KF5-EI



KRF1-EI/ KRF1-EI-IP44




M3+KRF1-EI-IP44




M4+KRF1-EI-IP44




M4 PRO+KRF1-EI-IP44



KF5




M3+KF5




M4+KF5




M4 PRO+KF5



KRF1/ KRF1-IP44




M3+KRF1-IP44





M4+KRF1-IP44




M4+PRO-KRF1-IP44



TSF1




M+TSF1




M4+TSF1




M4 PRO+TSF1



TSA1




M3+TSA1




M4+TSA1




M4 PRO+TSA1



KSF1-EI




M3+KSF1-EI




M4+KSF1-EI




M4 PRO+KSF1-EI



KSA1-EI




M3+KSA1-EI




M4+KSA1-EI




M4 PRO+KSA1-EI



KSF1




M3+KRF1




M4+KRF1




M4 PRO+KRF1



KSA1




M3+KSA1




M4+KSA1




M4 PRO+KSA1



TSA2




M3+TSA2




M4+TSA2




M4 PRO+TSA2



TSA3




M3+TSA3




M4+TSA3




M4 PRO+TSA3



KSA2-EI




M3+KSA2-EI




M4+KSA2-EI




M4 PRO+KSA2-EI



KSA3-EI




M3+KSA3-EI




M4+KSA3-EI




M4 PRO+KSA3-EI



KSA2




M3+KSA2




M4+KSA2




M4 PRO+KSA2



KSA3




M3+KSA3




M4+KSA3





M4 PRO+KSA3



TSA1D

145X75 | 355° | 30° | UK CA | CE






TSA2D

145X75 | UK CA | CE






TSA3D

145X75 | 355° | 18° | UK CA | CE






KSA1D-EI

145X80 | 355° | 30° | UK CA | CE






KSA2D-EI


145X80 | UK CA | CE






KSA3D-EI

145X80 | 355° | 18° | UK CA | CE






KSA1D

145X75 | 355° | 30° | UK CA | CE






KSA2D

145X75 | UK CA | CE






KSA3D

145X75 | 355° | 18° | UK CA | CE





SKYJACK

Incl. Phase Dim Driver
And Fast Connection Box




SKYJACK A68 – Classic Tiltable Downlight



38° | ±30° Tiltable | 2700K 3000K | CRI >90 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finsh



Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
							900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-WW
							950lm	750lm	SJA1-9303809P-BB

Code Remark: P=P(Phase Dim)


SKYJACK A68 – Classic Tiltable Downlight



38° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 6W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution

3000K



Trim Finsh



Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	18V	350mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-WW
							650lm	Max.450lm	SJA1-9D33806P-BB

Code Remark: P=P(Phase Dim)




SKYJACK D – Recessed Architectural Tiltable Downlight



38° | Cut-off 30° | ±30° Tiltable | 2700K 3000K | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finsh



Black(BB)

White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
							900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	750lm	SJD-9303809P-WW
							950lm	700lm	SJD-9303809P-BB

Code Remark: P=P(Phase Dim)


SKYJACK D-DW – Recessed Architectural Tiltable Downlight



38° | Cut-off 30° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 6W, CRI>90, Bridgelux
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution

3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	18V	350mA	90	1800K-3000k	38°	650lm	Max.450lm	SJA1-9D33806P-WW
							650lm	Max.400lm	SJA1-9D33806P-BB

Code Remark: P=P(Phase Dim)




SKYJACK F – IP65 Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finsh



Black(BB)

White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
							900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-WW
							950lm	750lm	SJF-9303809P-BB

Code Remark: P=P(Phase Dim)



FUSION

The Narrow Linear Downlight Series
Featuring Fixed Downlights,
Adjustable Downlights,
Spotlights,
Wall Washer Downlights,
General Light Downlights.



FUSION – The Narrow Linear Downlight Series

Create a circle of light from a line of LED Downlights
A narrow line of nano LED Downlights for pure minimalism
Superior glare control for high performance and visual comfort

Fixed, Adjustable, Wall Washer, General Light, Spotlight and Trimless versions for choice
Aluminum housing and in powder-coated finish, excellent dissipation performance & antirust

LED chip in standard CRI>90 and 3-step MacAdam for perfect color consistency
Color temperature in 2700K, 3000K and 4000K for selection
Different functions LED driver in On-Off, Phase Dim, 1-10V Dim and DALI Dim

Trimless Version



Trim Version



FUSION – The Narrow Linear Downlight Series

Fixed | Adjustable | Wall Washer | General Light | Spotlight | Trimless Spotlight





37X37 FF1 / 1 LED / 2W / 160 lm



62X37 FF2 / 2 LED / 4W / 330 lm



90X37 FF3 / 3 LED / 7W / 500 lm



65X65 FX4 / 4 LED / 9W / 650 lm



144X37 FF5 / 5 LED / 11W / 750 lm



282X37 FF10 / 10 LED / 22W / 1650 lm



152X44 FFT5 / 5LED / 11W / 750 lm



290X44 FFT10 / 10 LED / 22W / 1650 lm



160X52 FA5 / 5 LED / 11W / 750 lm



298X52 FA10 / 10 LED / 22W / 1650 lm





144X37 FW5 / 5 LED / 11W / 550 lm



282X37 FW10 / 10 LED / 22W / 1200 lm



152X44 FWT5 / 5 LED / 11W / 550 lm



290X44 FWT10 / 10 LED / 22W / 1200 lm



Secondary Reflector




Black




Specular

Beam



Medium 24°



Wide 40°



144X37 FG5 / 5 LED / 11W / 400 lm



282X37 FG10 / 10 LED / 22W / 850 lm




152X44 FGT5 / 5 LED / 11W / 400 lm



290X44 FGT10 / 10 LED / 22W / 850 lm



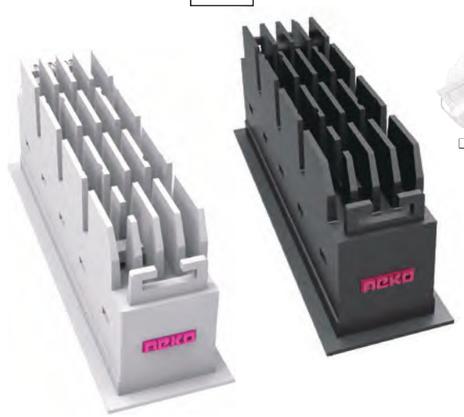



62X37 FS1 / 1 LED / 2W / 160 lm



90X37 FS2 / 2 LED / 4W / 330 lm



144X37 FS3 / 3 LED / 7W / 500 lm



282X37 FS6 / 6 LED / 14W / 900 lm



144X37 FF3-FS1 / 4 LED / 9W / 600 lm



282X37 FF6-FS2 / 8 LED / 18W / 1200 lm



152X44 FST3 / 3 LED / 7W / 500 lm



290X44 FST6 / 6 LED / 14W / 900 lm



152X44 FFT3-FST1 / 4 LED / 9W / 600 lm



290X44 FFT6-FST2 / 8 LED / 18W / 1200 lm

FUSION – The Narrow Linear Downlight Series





Black Reflector



1 LED / 2W / 160lm



2 LED / 4W / 330lm



3 LED / 7W / 500lm



5 LED / 11W / 750lm



10 LED / 22W / 1650lm

Specular Reflector



1 LED / 2W / 180lm



2 LED / 4W / 360lm



3 LED / 7W / 540lm



5 LED / 11W / 850lm



10 LED / 22W / 1850lm

Secondary Reflector



Black



Specular


Beam





Medium 24°





Wide 40°

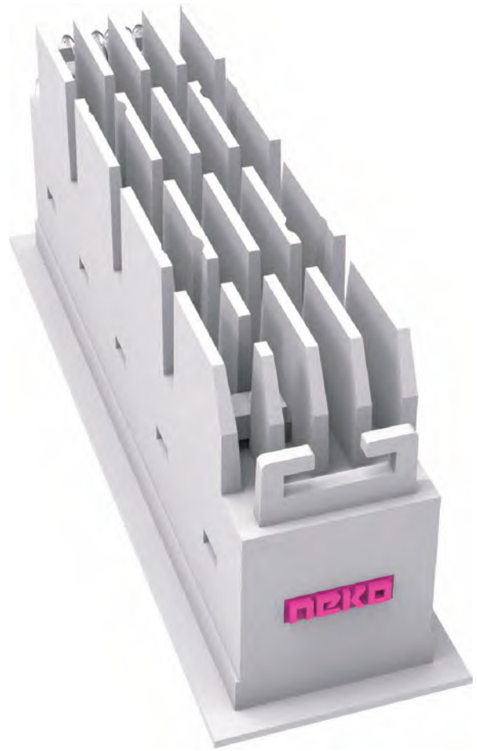






















Project: Bvlgari Hotel, Shanghai, China





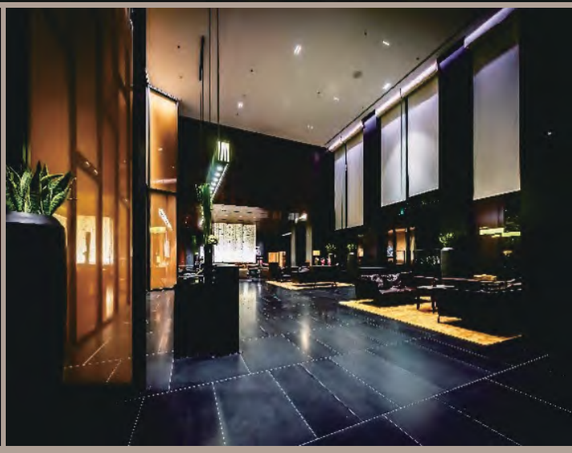





Project: Eggen Restaurant, Norway

Project: Oslo Hall, City Hall Gallery, Norway



FUSION MINI

Mini-profile linear downlight
Multi-head configurations
Modular platform for design flexibility
Trim and trimless options available



Project: Eggen Restaurant, Norway

New

FUSION MINI


A compact linear downlight system designed for minimal visual presence, offering multi-head configurations and modular construction to ensure ceiling consistency, flexible installation, and easy maintenance for refined architectural interiors.



unit:mm



Honeycomb (Optional)



FM2



FM3



FM4



FM6



FUSION MINI FM2 – Fixed LED Downlight

New




24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 45x25mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

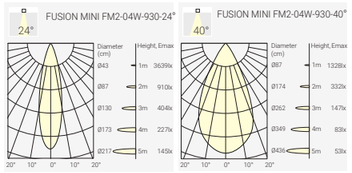

Finish



White Black

Order Info (FUSION MINI FM2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	24°	460lm	320lm	FM2-9272404N-WB
						40°	460lm	370lm	FM2-9274004N-WB
					3000K	24°	480lm	330lm	FM2-9302404N-WB
						40°	480lm	380lm	FM2-9304004N-WB
					4000K	24°	510lm	350lm	FM2-9402404N-WB
						40°	510lm	400lm	FM2-9404004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FM2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM2 FUSION MINI FM2	**927** CRI>90/ 2700K	**24** 24°	**04** 4W	**N** No Driver	**W** White	**B** Black	**H** Honeycob
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION MINI FM3 – Fixed LED Downlight

New




24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 63x25mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 580lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

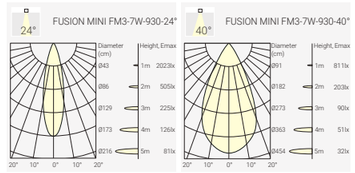

Finish




White Black

Trimless Version



FUSION MINI FMT3



Order Info (FUSION MINI FM3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	24°	700lm	440lm	FM3-9272407N-WB
						40°	700lm	530lm	FM3-9274007N-WB
					3000K	24°	720lm	450lm	FM3-9302407N-WB
						40°	720lm	550lm	FM3-9304007N-WB
					4000K	24°	780lm	470lm	FM3-9402407N-WB
						40°	780lm	580lm	FM3-9404007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FM3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM3 FUSION MINI FM3	**927** CRI>90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycob
FMT3 FUSION MINI FMT3	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION MINI FM4 – Fixed LED Downlight

New




24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 84x25mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

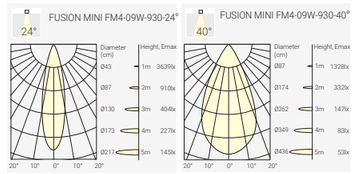

Finish



White Black

Order Info (FUSION MINI FM4 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	920lm	600lm	FM4-9272409N-WB
						40°	920lm	740lm	FM4-9274009N-WB
					3000K	24°	960lm	630lm	FM4-9302409N-WB
						40°	960lm	760lm	FM4-9304009N-WB
					4000K	24°	1020lm	660lm	FM4-9402409N-WB
						40°	1020lm	800lm	FM4-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION MINI FMT4



Coding

FM4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM4 FUSION MINI FM4	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**B** Black	**H** Honeycob
FMT4 FUSION MINI FMT4	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION MINI FM6 – Fixed LED Downlight

New





24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 120x25mm
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

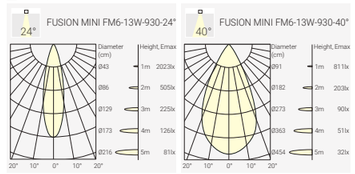

Finish



White Black

Order Info (FUSION MINI FM6 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	24°	1400lm	900lm	FM6-92724013N-WB
						40°	1400lm	1050lm	FM6-92740013N-WB
					3000K	24°	1440lm	950lm	FM6-93024013N-WB
						40°	1440lm	1100lm	FM6-93040013N-WB
					4000K	24°	1560lm	1000lm	FM6-94024013N-WB
						40°	1560lm	1150lm	FM6-94040013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION MINI FMT6




Coding


FM6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM6 FUSION MINI FM6	**927** CRI>90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycob
FMT6 FUSION MINI FMT6	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION FF1 – Fixed LED Downlight











Quick Info

- Ceiling Cut-out: 37x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3 W	3 V	700mA	90	2700K	24°	200lm	130lm	FF1-9272402N-WB
						40°	200lm	130lm	FF1-9274002N-WB
					3000K	24°	210lm	140lm	FF1-9302402N-WB
						40°	210lm	140lm	FF1-9304002N-WB
					4000K	24°	230lm	155lm	FF1-9402402N-WB
						40°	230lm	155lm	FF1-9404002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1 FUSION FF1	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**24** 24° **40** 40°	**02** 2W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	



FUSION FF2 – Fixed LED Spotlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 62x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6 V	700mA	90	2700K	24°	400lm	290lm	FF2-9272404N-WB
						40°	400lm	290lm	FF2-9274004N-WB
					3000K	24°	450lm	300lm	FF2-9302404N-WB
						40°	450lm	300lm	FF2-9304004N-WB
					4000K	24°	500lm	330lm	FF2-9402404N-WB
						40°	500lm	330lm	FF2-9404004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FUSION FF2	**927** CRI>90/ 2700K	**24** 24°	**04** 4W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			



FUSION FF3 – Fixed LED Spotlight



24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Shielding Angle:50°

Light Distribution

3000K

Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9 W	9V	700mA	90	2700K	24°	600lm	420lm	FF3-9272407N-WB
						40°	600lm	420lm	FF3-9274007N-WB
					3000K	24°	650lm	450lm	FF3-9302407N-WB
						40°	650lm	450lm	FF3-9304007N-WB
					4000K	24°	700lm	500lm	FF3-9402407N-WB
						40°	700lm	500lm	FF3-9404007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FUSION FF3	**927** CRI>90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			



Project: Hallunda Station, Sweden


FUSION FF4 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 65x65mm
- OSRAM LED: 9W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FX4 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	750lm	550lm	FX4-9272409N-WB
						40°	750lm	550lm	FX4-9274009N-WB
					3000K	24°	800lm	600lm	FX4-9302409N-WB
						40°	800lm	600lm	FX4-9304009N-WB
					4000K	24°	900lm	650lm	FX4-9402409N-WB
						40°	900lm	650lm	FX4-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FX4 FUSION FX4	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

Project: Office Helsinki, Finland


FUSION FF5 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White Black

Reflector Options




Black Specular

Trimless Version



FFT5



Order Info (FUSION FF5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	24°	950lm	650lm	FF5-9272411N-WB
						40°	950lm	650lm	FF5-9274011N-WB
					3000K	24°	1050lm	700lm	FF5-9302411N-WB
						40°	1050lm	700lm	FF5-9304011N-WB
					4000K	24°	1150lm	750lm	FF5-9402411N-WB
						40°	1150lm	750lm	FF5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF5 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FUSION FF5 **FFT5** FUSION FFT5	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**24** 24° **40** 40°	**11** 11W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black **S** Specualr	


Project: World Health Organization Building, Philippines



FUSION FF10 – Fixed LED Spotlight







Finish



White



Black

Reflector Options



Specualr




Black

Trimless Version



FFT10







Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (FUSION FF10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	90	2700K	24°	1900lm	1400lm	FF10-9272422N-WB
						40°	1900lm	1400lm	FF10-9274022N-WB
					3000K	24°	2050lm	1500lm	FF10-9302422N-WB
						40°	2050lm	1500lm	FF10-9304022N-WB
					4000K	24°	2200lm	1650lm	FF10-9402422N-WB
						40°	2200lm	1650lm	FF10-9404022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF10	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FUSION FF10	**927** CRI>90/ 2700K	**24** 24°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FFTA FUSION FFT10	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			



FUSION FF2-IP65 – Surface IP65 FUSION Downlight




35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 66x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 270lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	35°	400lm	240lm	FF2-9273504N-WB-IP
						45°	400lm	205lm	FF2-9274504N-WB-IP
					3000K	35°	450lm	250lm	FF2-9303504N-WB-IP
						45°	450lm	215lm	FF2-9304504N-WB-IP
					4000K	35°	500lm	270lm	FF2-9403504N-WB-IP
						45°	500lm	230lm	FF2-9404504N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FF2-IP65	**927** CRI>90/ 2700K	**35** 35°	**04** 4W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION FF3-IP65 – Surface IP65 FUSION Downlight




35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF3-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	35°	600lm	360lm	FF3-9273507N-WB-IP
						45°	600lm	315lm	FF3-9274507N-WB-IP
					3000K	35°	650lm	385lm	FF3-9303507N-WB-IP
						45°	650lm	335lm	FF3-9304507N-WB-IP
					4000K	35°	700lm	410lm	FF3-9403507N-WB-IP
						45°	700lm	350lm	FF3-9404507N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF3 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FF3-IP65	**927** CRI>90/ 2700K	**35** 35°	**07** 7W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION FF5-IP65 – Surface IP65 FUSION Downlight




35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 148x37mm
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF5-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	35°	950lm	745lm	FF5-9273511N-WB-IP
						45°	950lm	620lm	FF5-9274511N-WB-IP
					3000K	35°	1050lm	785lm	FF5-9303511N-WB-IP
						45°	1050lm	650lm	FF5-9304511N-WB-IP
					4000K	35°	1150lm	840lm	FF5-9403511N-WB-IP
						45°	1150lm	700lm	FF5-9404511N-WB-IP


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FF5-IP65	**927** CRI>90/ 2700K	**35** 35°	**11** 11W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION FF10-IP65 – Surface IP65 FUSION Downlight

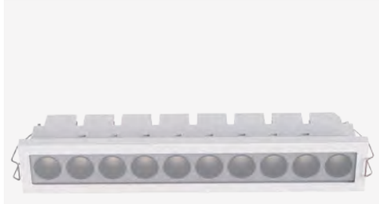


35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 286x37mm
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 40°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF10-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	35°	1900lm	1250lm	FF10-9272422N-WB-IP
						45°	1900lm	1200lm	FF10-9274022N-WB-IP
					3000K	35°	2050lm	1300lm	FF10-9302422N-WB-IP
						45°	2050lm	1250lm	FF10-9304022N-WB-IP
					4000K	35°	2200lm	1400lm	FF10-9402422N-WB-IP
						45°	2200lm	1300lm	FF10-9404022N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FF10-IP65	**927** CRI>90/ 2700K	**35** 35°	**22** 22W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION FA5– Adjustable LED Downlight




24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 160x53mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Reflector Options



Black



Specular

Order Info (FUSION FA5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	24°	950lm	650lm	FA5-9272411N-WB
						40°	950lm	650lm	FA5-9274011N-WB
					3000K	24°	1050lm	700lm	FA5-9302411N-WB
						40°	1050lm	700lm	FA5-9304011N-WB
					4000K	24°	1150lm	750lm	FA5-9402411N-WB
						40°	1150lm	750lm	FA5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5 FUSION FA5	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**24** 24° **40** 40°	**11** 11W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black **S** Specular	

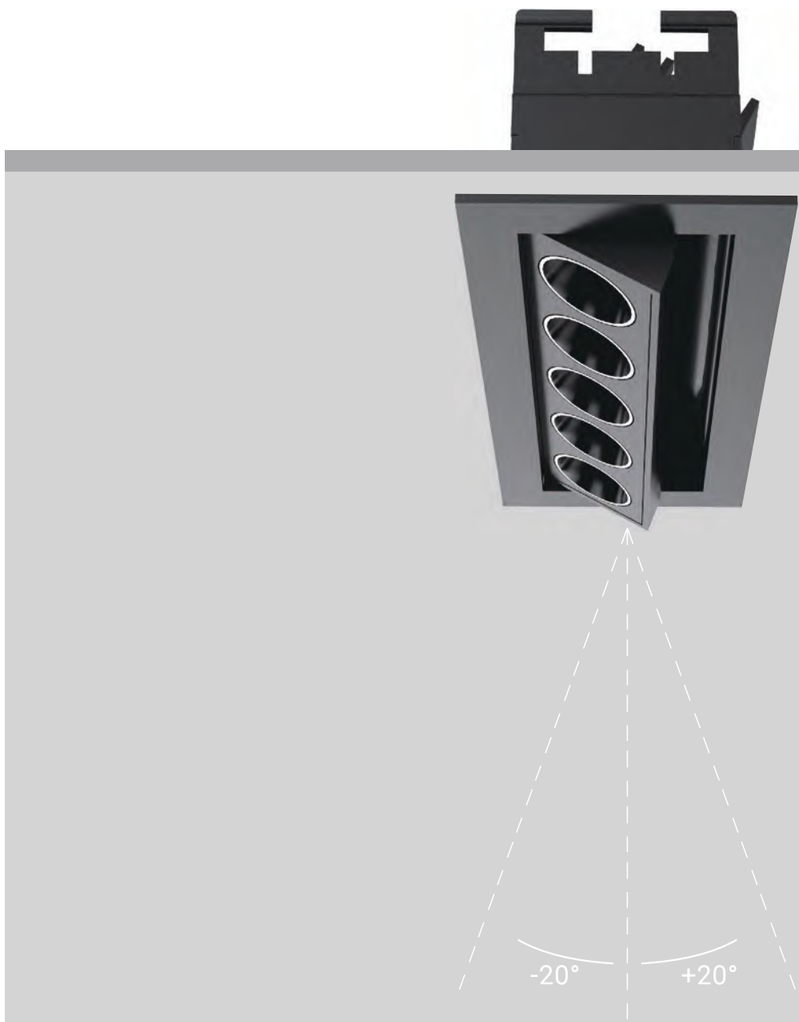

FUSION FA10 – Adjustable LED Downlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 198x53mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Reflector Options



Black



Specular

Order Info (FUSION FFA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	24°	1900lm	1400lm	FA10-9272422N-WB
						40°	1900lm	1400lm	FA10-9274022N-WB
					3000K	24°	2050lm	1500lm	FA10-9302422N-WB
						40°	2050lm	1500lm	FA10-9304022N-WB
					4000K	24°	2200lm	1650lm	FA10-9402422N-WB
						40°	2200lm	1650lm	FA10-9404022N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FA10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10 FUSION FA10	927 CRI>90/ 2700K	24 24°	22 22W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specular	
	940 CRI>90/ 4000K			P Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

Project: Bvlgari Hotel, Shanghai, China

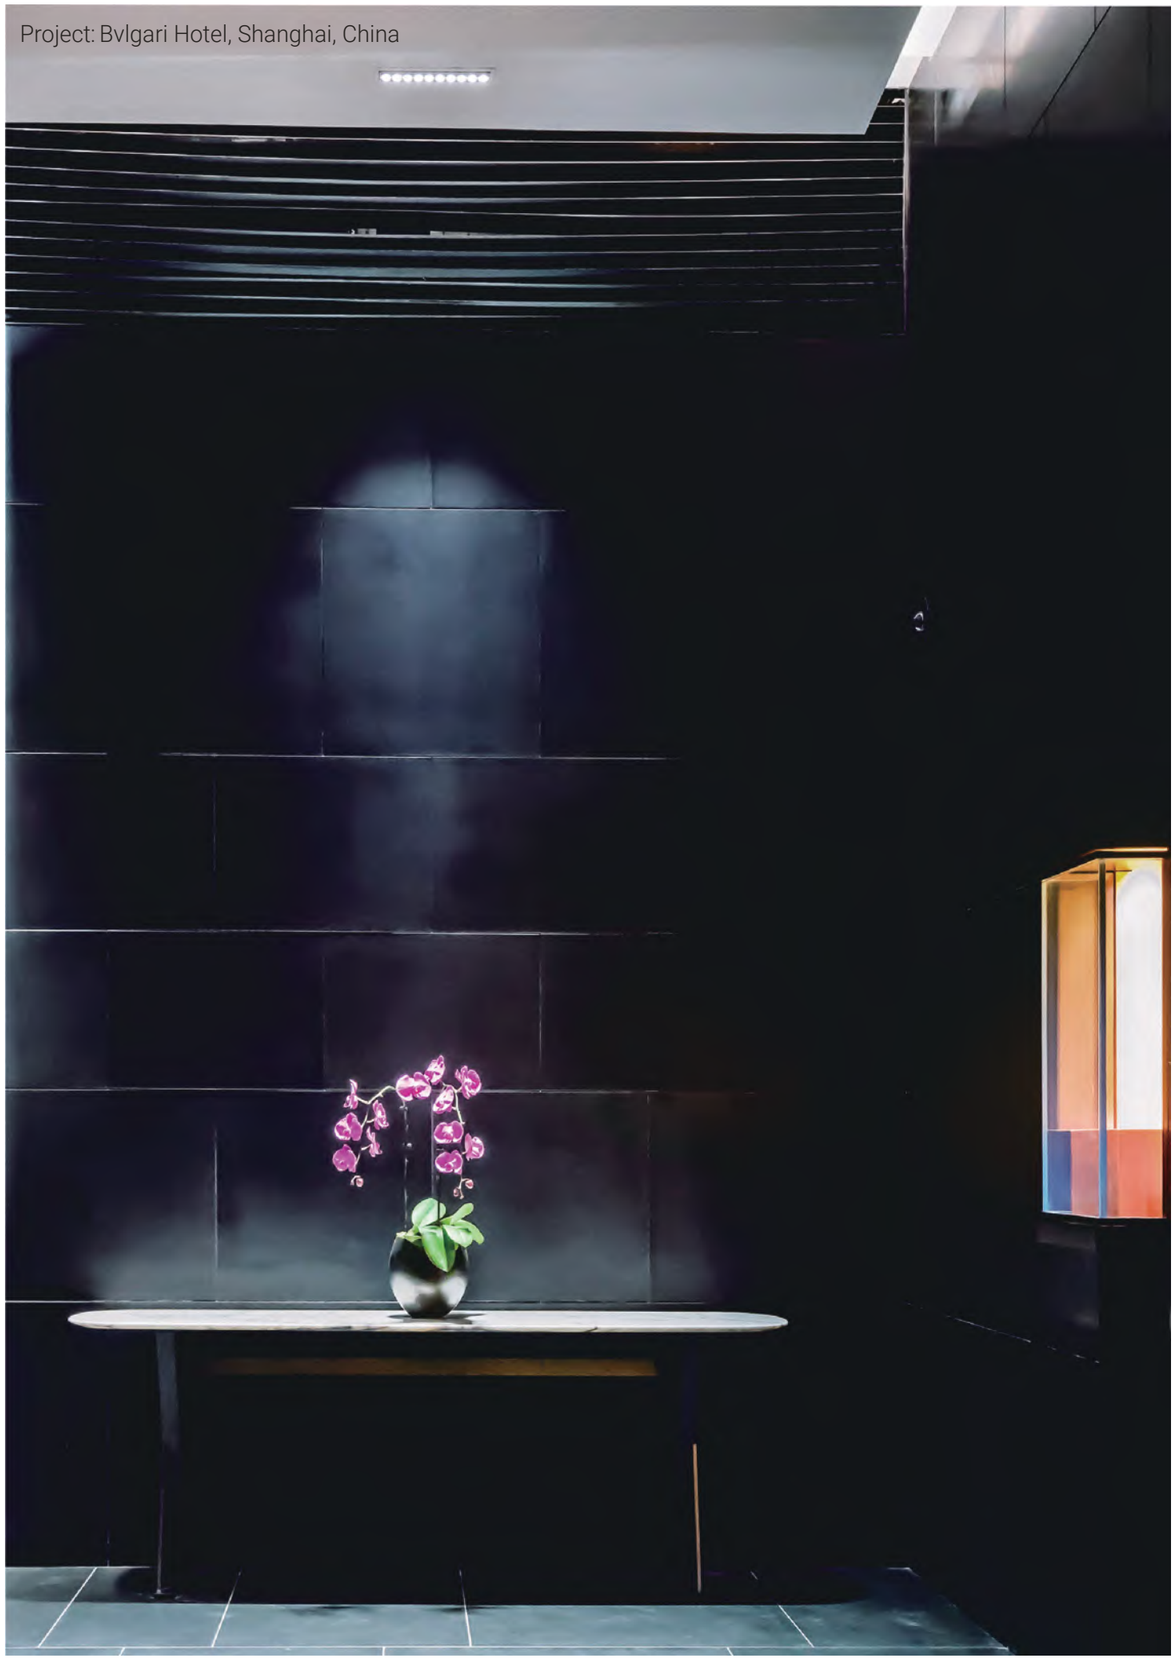


FUSION FW5 – Wall Washer LED Downlight



Wall Washer | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FW5 in White Trim & Matt Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	WW	900lm	450lm	FW5-927WW11N-WM
					3000K	WW	950lm	500lm	FW5-930WW11N-WM
					4000K	WW	1050lm	550lm	FW5-940WW11N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FWT5



Coding

FW5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW5 FUSION FW5	**927** CRI>90/ 2700K	**WW** Wall Washer	**11** 11W	**N** No Driver	**W** White	**M** Matt	
FWT5 FUSION FWT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			



FUSION FW10– Wall Washer LED Downlight




Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FW10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	WW	2000lm	1000lm	FW10-927WW22N-WM
					3000K	WW	2200lm	1100lm	FW10-930WW22N-WM
					4000K	WW	2400lm	1200lm	FW10-940WW22N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version




FWT10




Coding

FW10 – * ** ** * – * * – ***

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW10 FUSION FW10	**927** CRI>90/ 2700K	**WW** Wall Washer	**22** 22W	**N** No Driver	**W** White	**M** Matt	
FWTA FUSION FWT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

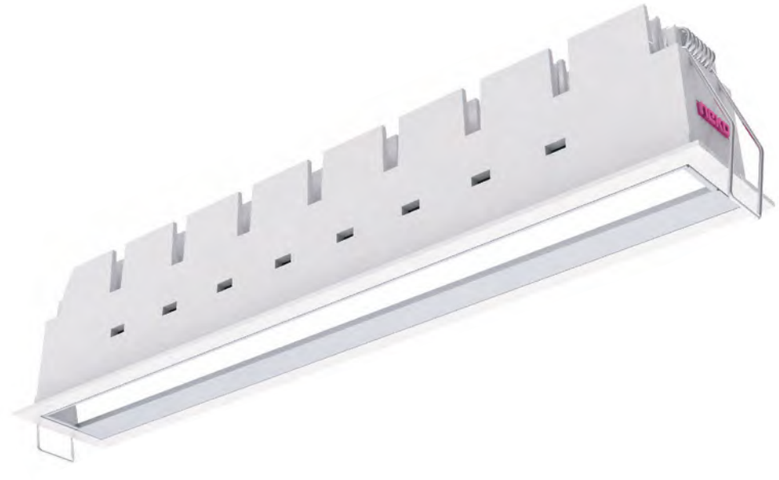





High quality wall washer illumination




FUSION FG5 – General LED Downlight



75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FG5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	75°	900lm	330lm	FG5-9277511N-WB
					3000K	75°	950lm	350lm	FG5-9277511N-WB
					4000K	75°	1050lm	400lm	FG5-9307511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FGT5



Coding

FG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG5 FUSION FG5	**927** CRI>90/ 2700K	**75** 75°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FGT5 FUSION FGT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION FG10 – General LED Downlight



75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø55mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White

Black

Order Info (FUSION FG10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	75°	2000lm	750lm	FG10-9277522N-WB
					3000K	75°	2200lm	800lm	FG10-9307522N-WB
					4000K	75°	2400lm	850lm	FG10-9407522N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FGT10



Coding

FG10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG10 FUSION FG10	**927** CRI>90/ 2700K	**75** 75°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FGTA FUSION FGT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

Project: Medical Office Celle Germany, Germany





Diversity Design with Adjustable Spot Light

















FUSION FS1 – Adjustable Spotlight




15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 62x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, No-Off, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	200lm	130lm	FS1-9271502N-WN
						30°	200lm	130lm	FS1-9273002N-WN
					3000K	15°	210lm	140lm	FS1-9301502N-WN
						30°	210lm	140lm	FS1-9303002N-WN
					4000K	15°	230lm	160lm	FS1-9401502N-WN
						30°	230lm	160lm	FS1-9403002N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS1 FUSION FS1	**927** CRI>90/ 2700K	**15** 15°	**02** 2W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**A** 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS2 – Adjustable Spotlight




15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	400lm	280lm	FS2-9271504N-WN
						30°	400lm	280lm	FS2-9273004N-WN
					3000K	15°	450lm	300lm	FS2-9301504N-WN
						30°	450lm	300lm	FS2-9303004N-WN
					4000K	15°	500lm	330lm	FS2-9401504N-WN
						30°	500lm	330lm	FS2-9403004N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS2 FUSION FS2	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS3– Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS3 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	15°	600lm	420lm	FS3-9271507N-WN
						30°	600lm	420lm	FS3-9273007N-WN
					3000K	15°	650lm	450lm	FS3-9301507N-WN
						30°	650lm	450lm	FS3-9303007N-WN
					4000K	15°	700lm	500lm	FS3-9401507N-WN
						30°	700lm	500lm	FS3-9403007N-WN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FST3





Coding

FS3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS3 FUSION FS3	**927** CRI>90/ 2700K	**15** 15°	**07** 7W	**N** No Driver	**W** White	**N** None	
FST3 FUSION FST3	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS6– Adjustable Spotlight




15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K





Finish




Black White

Order Info (FUSION FS6 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	15°	1200lm	800lm	FS6-9271513N-WN
						30°	1200lm	800lm	FS6-9273013N-WN
					3000K	15°	1300lm	850lm	FS6-9301513N-WN
						30°	1300lm	850lm	FS6-9303013N-WN
					4000K	15°	1400lm	900lm	FS6-9401513N-WN
						30°	1400lm	900lm	FS6-9403013N-WN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FST6





Coding

FS6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS6 FUSION FS6	**927** CRI>90/ 2700K	**15** 15°	**22** 22W	**N** No Driver	**W** White	**N** None	
FST6 FUSION FST6	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF3-FS3 – Adjustable Spotlight




24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FFS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12 V	700mA	90	2700K	24°	750lm	500lm	FFS1-9272409N-WB
						40°	750lm	500lm	FFS1-9274009N-WB
					3000K	24°	800lm	550lm	FFS1-9302409N-WB
						40°	800lm	550lm	FFS1-9304009N-WB
					4000K	24°	900lm	600lm	FFS1-9402409N-WB
						40°	900lm	600lm	FFS1-9404009N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FFT3-FST1





Coding

FFS1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Finish	Reflector Color		Accessory
FFS1 FUSION FFS1		**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver		**W** White	**N** None		
FFS3 FUSION FFT3-FST1		**930** CRI>90/ 3000K	**40** 40°		**F** On-Off		**B** Black			
		940 CRI>90/ 4000K			**P** Phase Dim					
					A 0-10V Dim					
					D DALI Dim					

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF6-FS2 – Adjustable Spotlight




24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K





Finish



White Black

Order Info (FUSION FFS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	24	700mA	90	2700K	24°	1500lm	1050lm	FFS2-9272417N-WB
						40°	1500lm	1050lm	FFS2-9274017N-WB
					3000K	24°	1600lm	1100lm	FFS2-9302417N-WB
						40°	1600lm	1100lm	FFS2-9304017N-WB
					4000K	24°	1800lm	1200lm	FFS2-9402417N-WB
						40°	1800lm	1200lm	FFS2-9404017N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FFT6-FST2





Coding

FFS2	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Finish	Reflector Color		Accessory
FFS2 FUSION FFS2		**927** CRI>90/ 2700K	**24** 24°	**17** 17W	**N** No Driver		**W** White	**N** None		
FFS4 FUSION FFT6-FST2		**930** CRI>90/ 3000K	**40** 40°		**F** On-Off		**B** Black			
		940 CRI>90/ 4000K			**P** Phase Dim					
					A 0-10V Dim					
					D DALI Dim					

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION G2 – Higher Efficiency Version

FUSION G2 Fixed



FUSION G2 FF1
2W/ 200lm @CRI90 3000K




FUSION G2 FF2
4W/ 400lm @CRI90 3000K



FUSION G2 FF3
6W/ 580lm @CRI90 3000K

FUSION G2 FF5
11W/ 900lm @CRI90 3000K

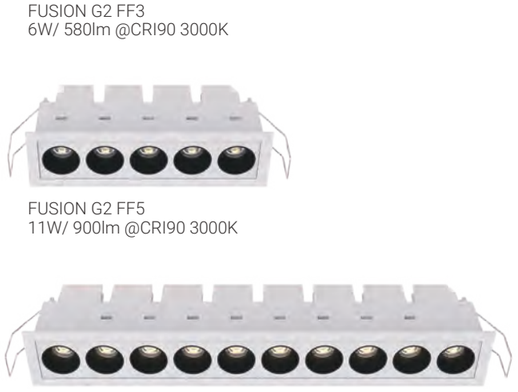

FUSION G2 FF10
22W/ 1900lm @CRI90 3000K


FUSION G2 Trimless Fixed



FUSION G2 FFT5
11W/ 900lm @CRI90 3000K




FUSION G2 FFT10
22W/ 1900lm @CRI90 3000K



Shielding Angle:50°

VS



Shielding Angle:35°

FUSION

LED: OSRAM
Beam: 24°, 40°
Shielding Angle: 50°
UGR: <16

FUSION G2

LED: Bridgelux
Beam:15°, 24°, 48°, 60°
Shielding Angle: 35°
UGR:<19
Higher Efficiency
Higher R9 Value

FUSION G2 Adjustable




FUSION G2 FA5
11W/ 900lm @CRI90 3000K



FUSION G2 FA10
22W/ 1900lm @CRI90 3000K

Beam Angles

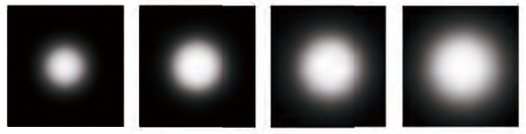

Spot 15° Medium 24° Flood 48° Wide Flood 60°

Finsh



White



Black

FUSION G2 FF1 – Fixed LED Downlight




15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 37x37mm
- Bridgelux LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

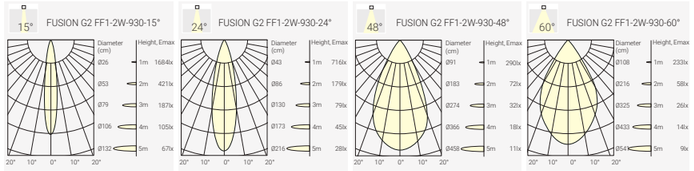

Finish



White Black

Order Info (FUSION G2 FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	230lm	190lm	FF1G2-9271502N-WB
						24°	230lm	180lm	FF1G2-9272402N-WB
						48°	230lm	180lm	FF1G2-9274802N-WB
						60°	230lm	180lm	FF1G2-9276002N-WB
					3000K	15°	240lm	200lm	FF1G2-9301502N-WB
						24°	240lm	190lm	FF1G2-9302402N-WB
						48°	240lm	190lm	FF1G2-9304802N-WB
						60°	240lm	190lm	FF1G2-9306002N-WB
					4000K	15°	260lm	220lm	FF1G2-9401502N-WB
						24°	260lm	200lm	FF1G2-9402402N-WB
						48°	260lm	200lm	FF1G2-9404802N-WB
						60°	260lm	200lm	FF1G2-9406002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1G2 FUSION G2 FF1	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**02** 2W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	

FUSION G2 FF2 – Fixed LED Downlight




15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 68x37mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

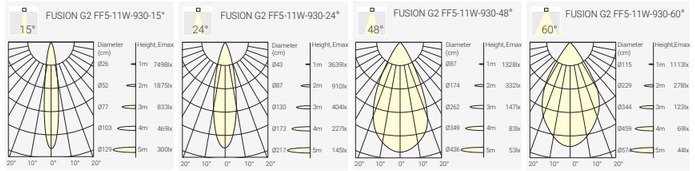

Finish



White Black

Order Info (FUSION G2 FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	460lm	380lm	FF2G2-8271510N-WB
						24°	460lm	350lm	FF2G2-8272410N-WB
						48°	460lm	350lm	FF2G2-8274810N-WB
						60°	460lm	350lm	FF2G2-8276010N-WB
					3000K	15°	480lm	400lm	FF2G2-8301510N-WB
						24°	480lm	360lm	FF2G2-8302410N-WB
						48°	480lm	360lm	FF2G2-8304810N-WB
						60°	480lm	360lm	FF2G2-8306010N-WB
					4000K	15°	510lm	420lm	FF2G2-8401510N-WB
						24°	510lm	380lm	FF2G2-8402410N-WB
						48°	510lm	380lm	FF2G2-8404810N-WB
						60°	510lm	380lm	FF2G2-8406010N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2G2 FUSION G2 FF2	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**04** 4W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	

FUSION G2 FF3 – Fixed LED Downlight




15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 90x37mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

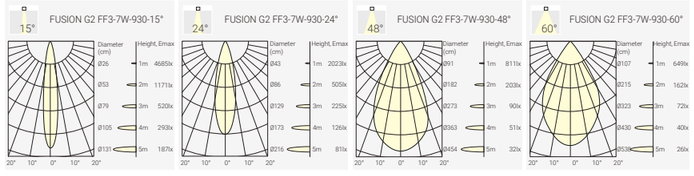

Finish



White Black

Order Info (FUSION G2 FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	80	2700K	15°	700lm	560lm	FF3G2-9271507N-WB
						24°	700lm	500lm	FF3G2-9272407N-WB
						48°	700lm	500lm	FF3G2-9274807N-WB
						60°	700lm	500lm	FF3G2-9276007N-WB
					3000K	15°	720lm	580lm	FF3G2-9301507N-WB
						24°	720lm	520lm	FF3G2-9302407N-WB
						48°	720lm	520lm	FF3G2-9304807N-WB
						60°	720lm	520lm	FF3G2-9306007N-WB
					4000K	15°	780lm	600lm	FF3G2-9401507N-WB
						24°	780lm	550lm	FF3G2-9402407N-WB
						48°	780lm	550lm	FF3G2-9404807N-WB
						60°	780lm	550lm	FF3G2-9406007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF3G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3G2 FUSION G2 FF3	**927** CRI>90/ 2700K	**15** 15°	**07** 7W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V Dim			
				D DALI Dim			

FUSION G2 FF5 – Fixed LED Downlight




15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

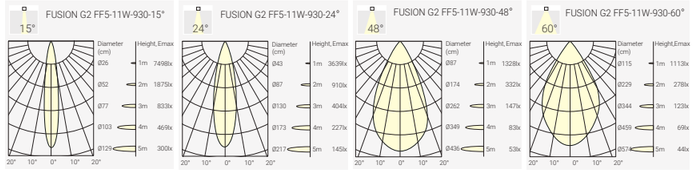

Finish



White Black

Order Info (FUSION G2 FF5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FF5G2-9271511N-WB
						24°	1150lm	830lm	FF5G2-9272411N-WB
						48°	1150lm	830lm	FF5G2-9274811N-WB
						60°	1150lm	830lm	FF5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FF5G2-9301511N-WB
						24°	1200lm	850lm	FF5G2-9302411N-WB
						48°	1200lm	850lm	FF5G2-9304811N-WB
						60°	1200lm	850lm	FF5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FF5G2-9401511N-WB
						24°	1300lm	900lm	FF5G2-9402411N-WB
						48°	1300lm	900lm	FF5G2-9404811N-WB
						60°	1300lm	900lm	FF5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT5




Coding

FF5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5G2 FUSION G2 FF5	**927** CRI>90/ 2700K	**15** 15°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5G2 FUSION G2 FFT5	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V Dim			
				D DALI Dim			

FUSION G2 FF10 – Fixed LED Downlight

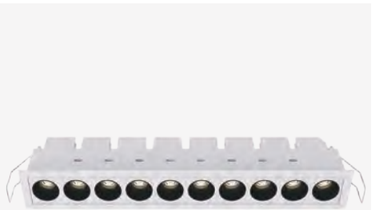



15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

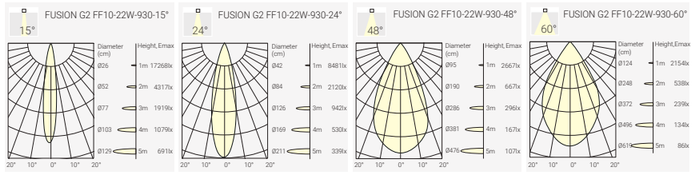

Finish



White




Black

Trimless Version



FUSION G2 FFT10





Order Info (FUSION G2 FF10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FF10G2-9271522N-WB
						24°	2300lm	1800lm	FF10G2-9272422N-WB
						48°	2300lm	1800lm	FF10G2-9274822N-WB
						60°	2300lm	1850lm	FF10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FF10G2-9301522N-WB
						24°	2450lm	1850lm	FF10G2-9302422N-WB
						48°	2450lm	1850lm	FF10G2-9304822N-WB
						60°	2450lm	1900lm	FF10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FF10G2-9401522N-WB
						24°	2600lm	1950lm	FF10G2-9402422N-WB
						48°	2600lm	1950lm	FF10G2-9404822N-WB
						60°	2600lm	2000lm	FF10G2-9406022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF3G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10G2 FUSION G2 FF10	**927** CRI>90/ 2700K	**15** 15°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FFT10G2 FUSION G2 FFT10	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V Dim			
				D DALI Dim			



FUSION G2 FA5 – Adjustable LED Downliht





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 160x53mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

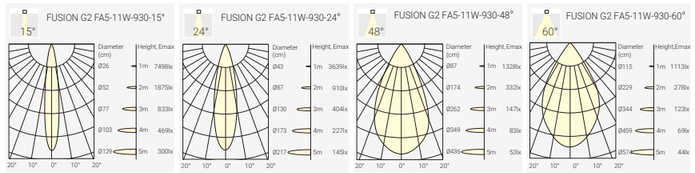

Finish



White Black

Order Info (FUSION G2 FA5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FA5G2-9271511N-WB
						24°	1150lm	830lm	FA5G2-9272411N-WB
						48°	1150lm	830lm	FA5G2-9274811N-WB
						60°	1150lm	830lm	FA5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FA5G2-9301511N-WB
						24°	1200lm	850lm	FA5G2-9302411N-WB
						48°	1200lm	850lm	FA5G2-9304811N-WB
						60°	1200lm	850lm	FA5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FA5G2-9401511N-WB
						24°	1300lm	900lm	FA5G2-9402411N-WB
						48°	1300lm	900lm	FA5G2-9404811N-WB
						60°	1300lm	900lm	FA5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FA5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5G2 FUSION G2 FA5	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**11** 11W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	

FUSION G2 FA10 – Adjustable LED Downliht





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 198x53mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K

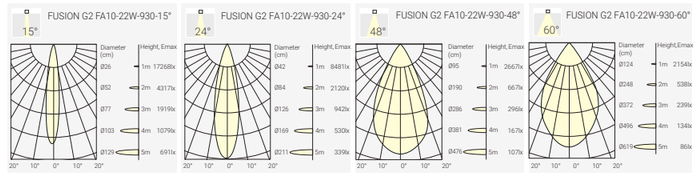

Finish



White Black

Order Info (FUSION G2 FA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FA10G2-9271522N-WB
						24°	2300lm	1800lm	FA10G2-9272422N-WB
						48°	2300lm	1800lm	FA10G2-9274822N-WB
						60°	2300lm	1850lm	FA10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FA10G2-9301522N-WB
						24°	2450lm	1850lm	FA10G2-9302422N-WB
						48°	2450lm	1850lm	FA10G2-9304822N-WB
						60°	2450lm	1900lm	FA10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FA10G2-9401522N-WB
						24°	2600lm	1950lm	FA10G2-9402422N-WB
						48°	2600lm	1950lm	FA10G2-9404822N-WB
						60°	2600lm	2000lm	FA10G2-9406022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FA5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10G2 FUSION G2 FA10	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**22** 22W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	

Project: Application Reference



FUSION FX4FC – Fixed Ceiling Light


New



30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- BRIDGELUX LED: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 790lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K



Finish



White Black

Order Info (FUSION FX4 in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	12V	700mA	90	2700K	30°	950lm	720lm	FX4FC-9273010F-WB
						30°	950lm	720lm	FX4FC-9273010F-BB
					3000K	30°	1000lm	750lm	FX4FC-9303010F-WB
						30°	1000lm	750lm	FX4FC-9303010F-BB
					4000K	30°	1050lm	790lm	FX4FC-9403010F-WB
						30°	1050lm	790lm	FX4FC-9403010F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black

Coding

FX4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FX4FC FX4FC-10W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	30 30°	10 10W	F On-Off D DALI Dim	W White B Black	B Black	

FUSION FF5FC – Fixed Ceiling Light


New



38° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- BRIDGELUX LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FF5 in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	38°	1250lm	970lm	FF5FC-9273813F-WB
						38°	1250lm	970lm	FF5FC-9273813F-BB
					3000K	38°	1300lm	1000lm	FF5FC-9303813F-WB
						38°	1300lm	1000lm	FF5FC-9303813F-BB
					4000K	38°	1350lm	1050lm	FF5FC-9403813F-WB
						38°	1350lm	1050lm	FF5FC-9403813F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black

Coding


FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5FC FF5FC-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	38 38°	11 11W	F On-Off D DALI Dim	W White B Black	B Black	

FUSION FF10FC – Fixed Ceiling Light

New






38° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- BRIDGELUX LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 2100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

3000K



Finish



White



Black

Reflector Options



Black

Order Info (FUSION FF10 in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	90	2700K	38°	2500lm	1940lm	FF10FC-9273822F-WB
						38°	2500lm	1940lm	FF10FC-9273822F-BB
					3000K	38°	2600lm	2000lm	FF10FC-9303822F-WB
						38°	2600lm	2000lm	FF10FC-9303822F-BB
					4000K	38°	2700lm	2100lm	FF10FC-9403822F-WB
						38°	2700lm	2100lm	FF10FC-9403822F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10FC FF10FC-22W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	38 38°	22 22W	F On-Off D DALI Dim	W White B Black	B Black	



Project: Application Reference

FUSION
Linear System

Modular design flexible linear profile system
Light line with 50mm profile width, customized lengths
Pendant, surface, trimless recessed, trim recessed
Opal, accent light, spotlight, wall washer optics
Can also put FUSION downlights into profile
On-Off, Phase Dim, 1-10V Dim, DALI Dim




FUSION Linear System – Modular Design Flexible Linear Profile System

Project: Office Shire House, U.K.



Project: TEM head office, Čatež, Slovenia



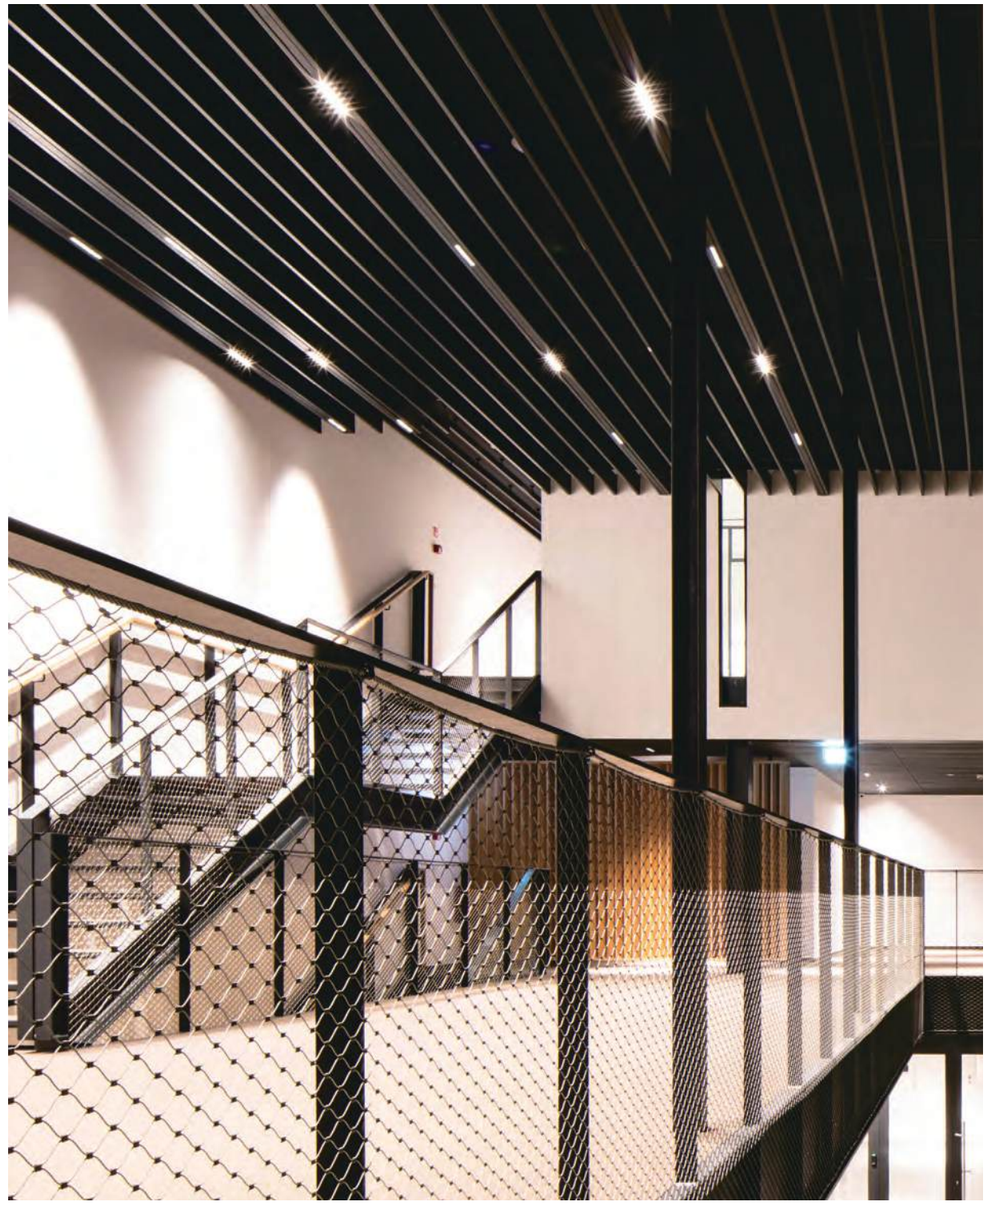

FUSION Linear System – Modular Design Flexible Linear Profile System


Project: Skyline Hill, Germany



FUSION Linear System – Modular Design Flexible Linear Profile System


Project: Office Les Macons Parisiens, France

FUSION Linear System – Modular Design Flexible Linear Profile System

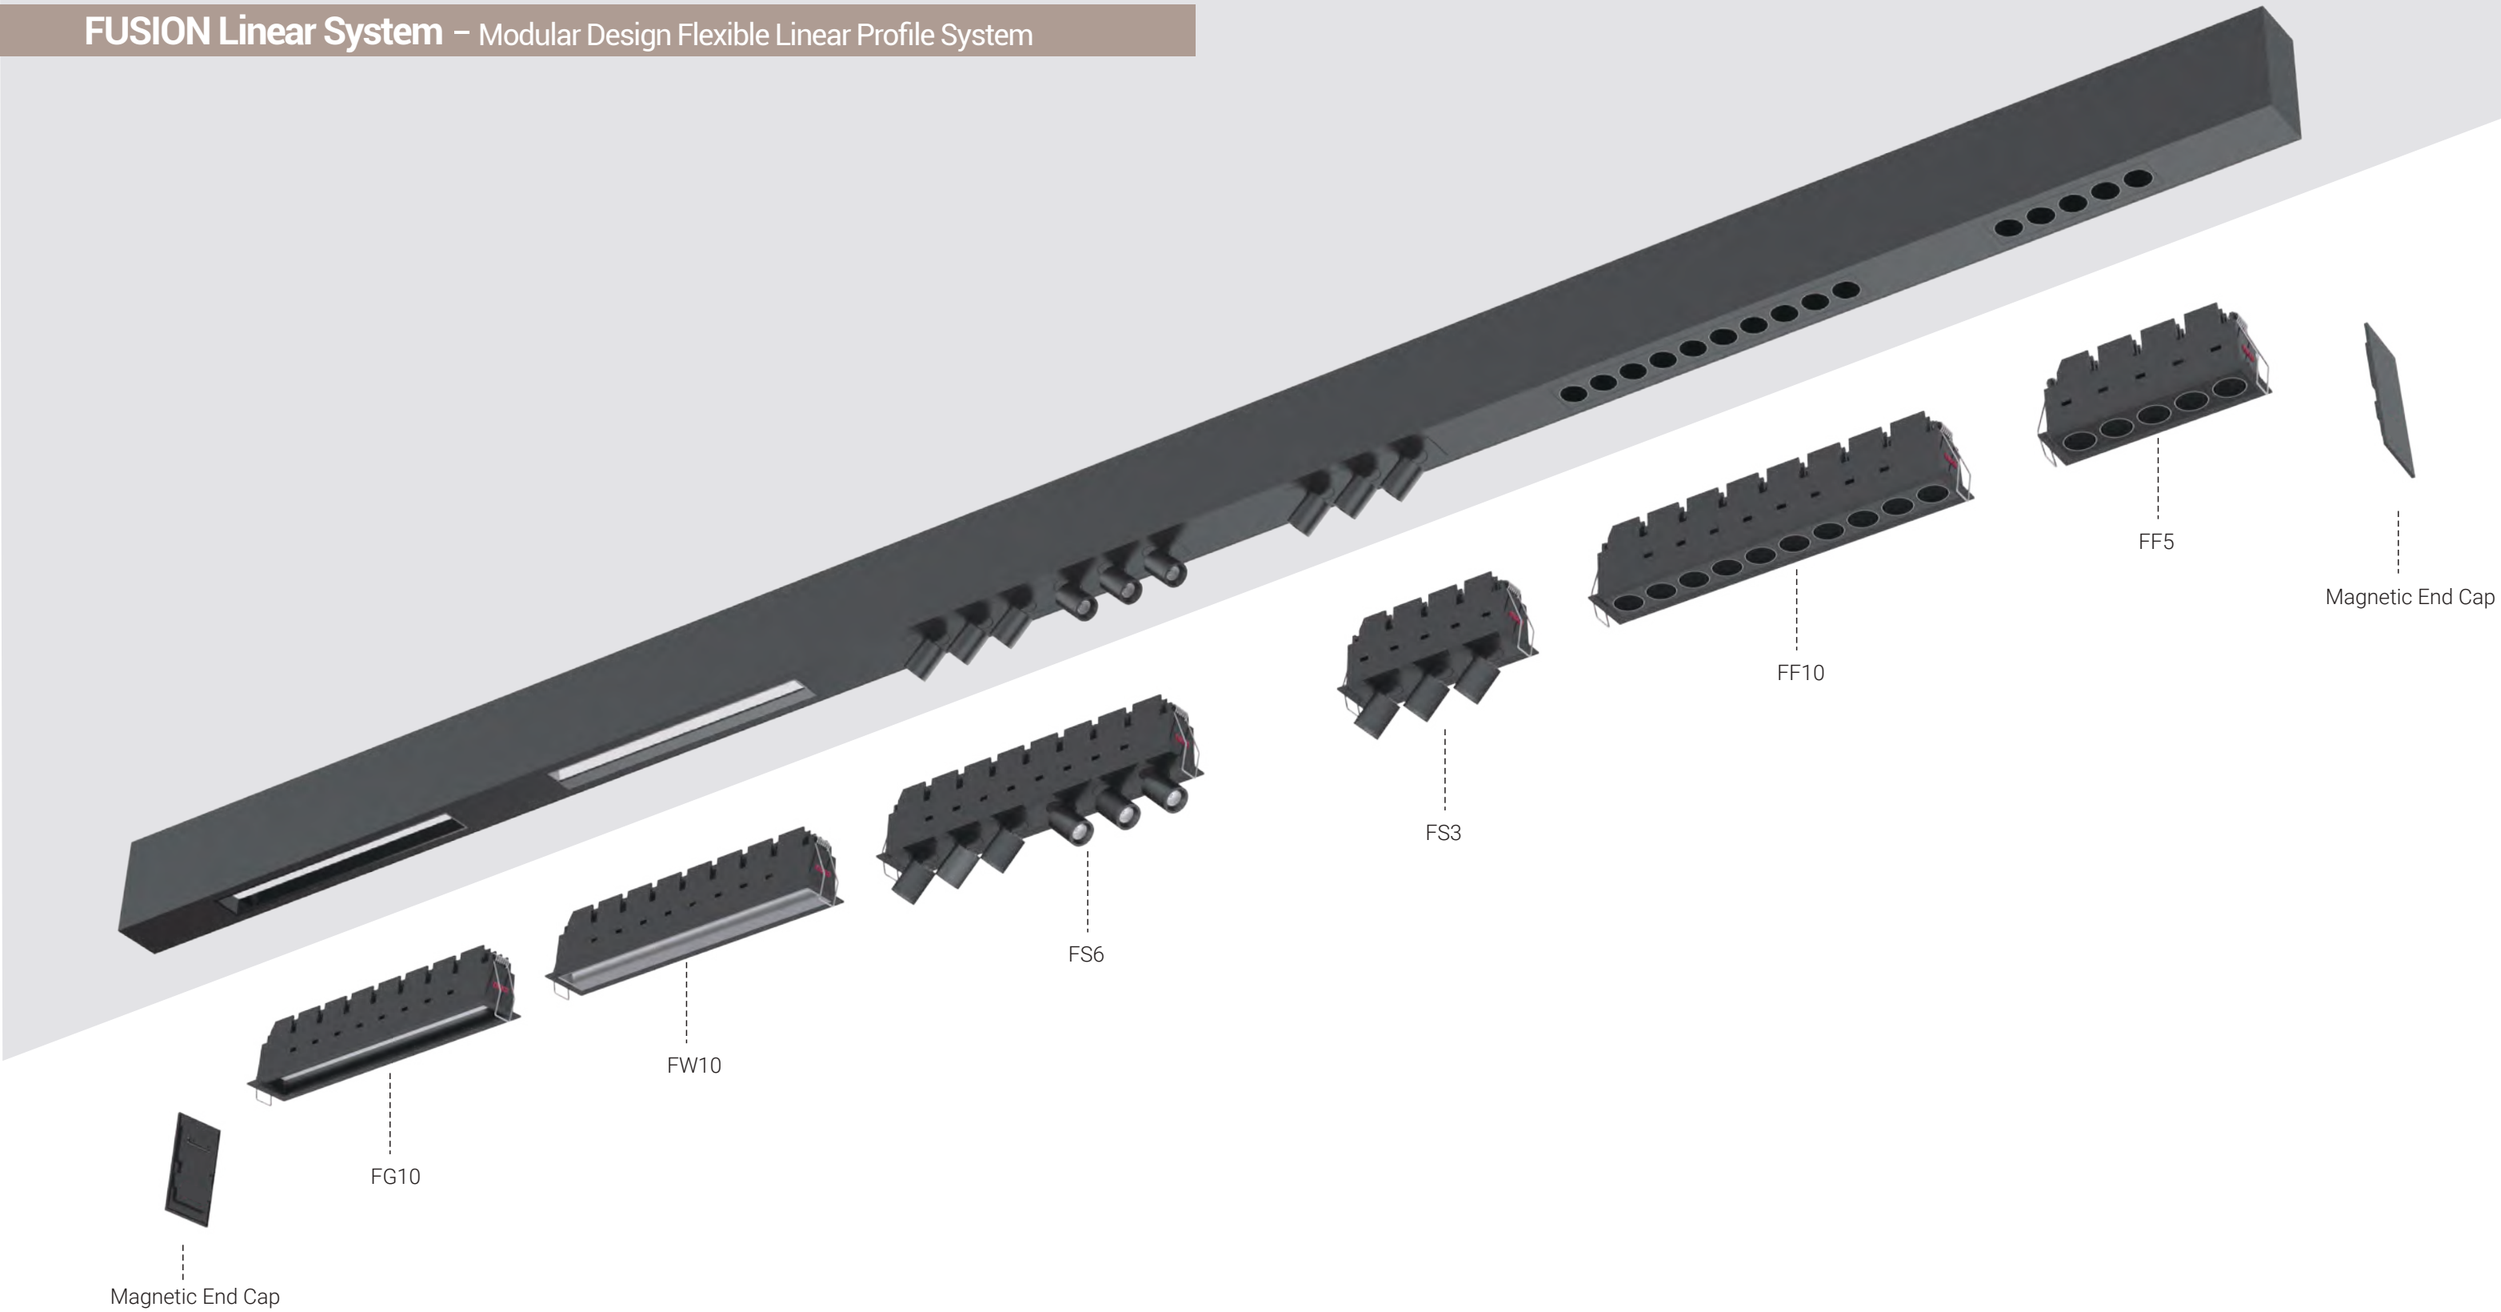

- Suspended, surface mounted and recessed mounted luminaires.
- Easy and unlimited length adjustment,seamless connection.
- Can be used as single fixed / general light / spotlight / wall washer / MIXED.
- Modular profile design with no visible screws, standard length 1.2m & 1.5mm.
- Aluminum profile, color choices white / black.
- Suspended luminaire with 2000mm cable suspension, tool free height adjustment.
- High visual comfort, UGR
- LED 3000K / 4000K, binning≤3 step MacAdam, CRI 80 / 90.

FUSION Linear System – Modular Design Flexible Linear Profile System

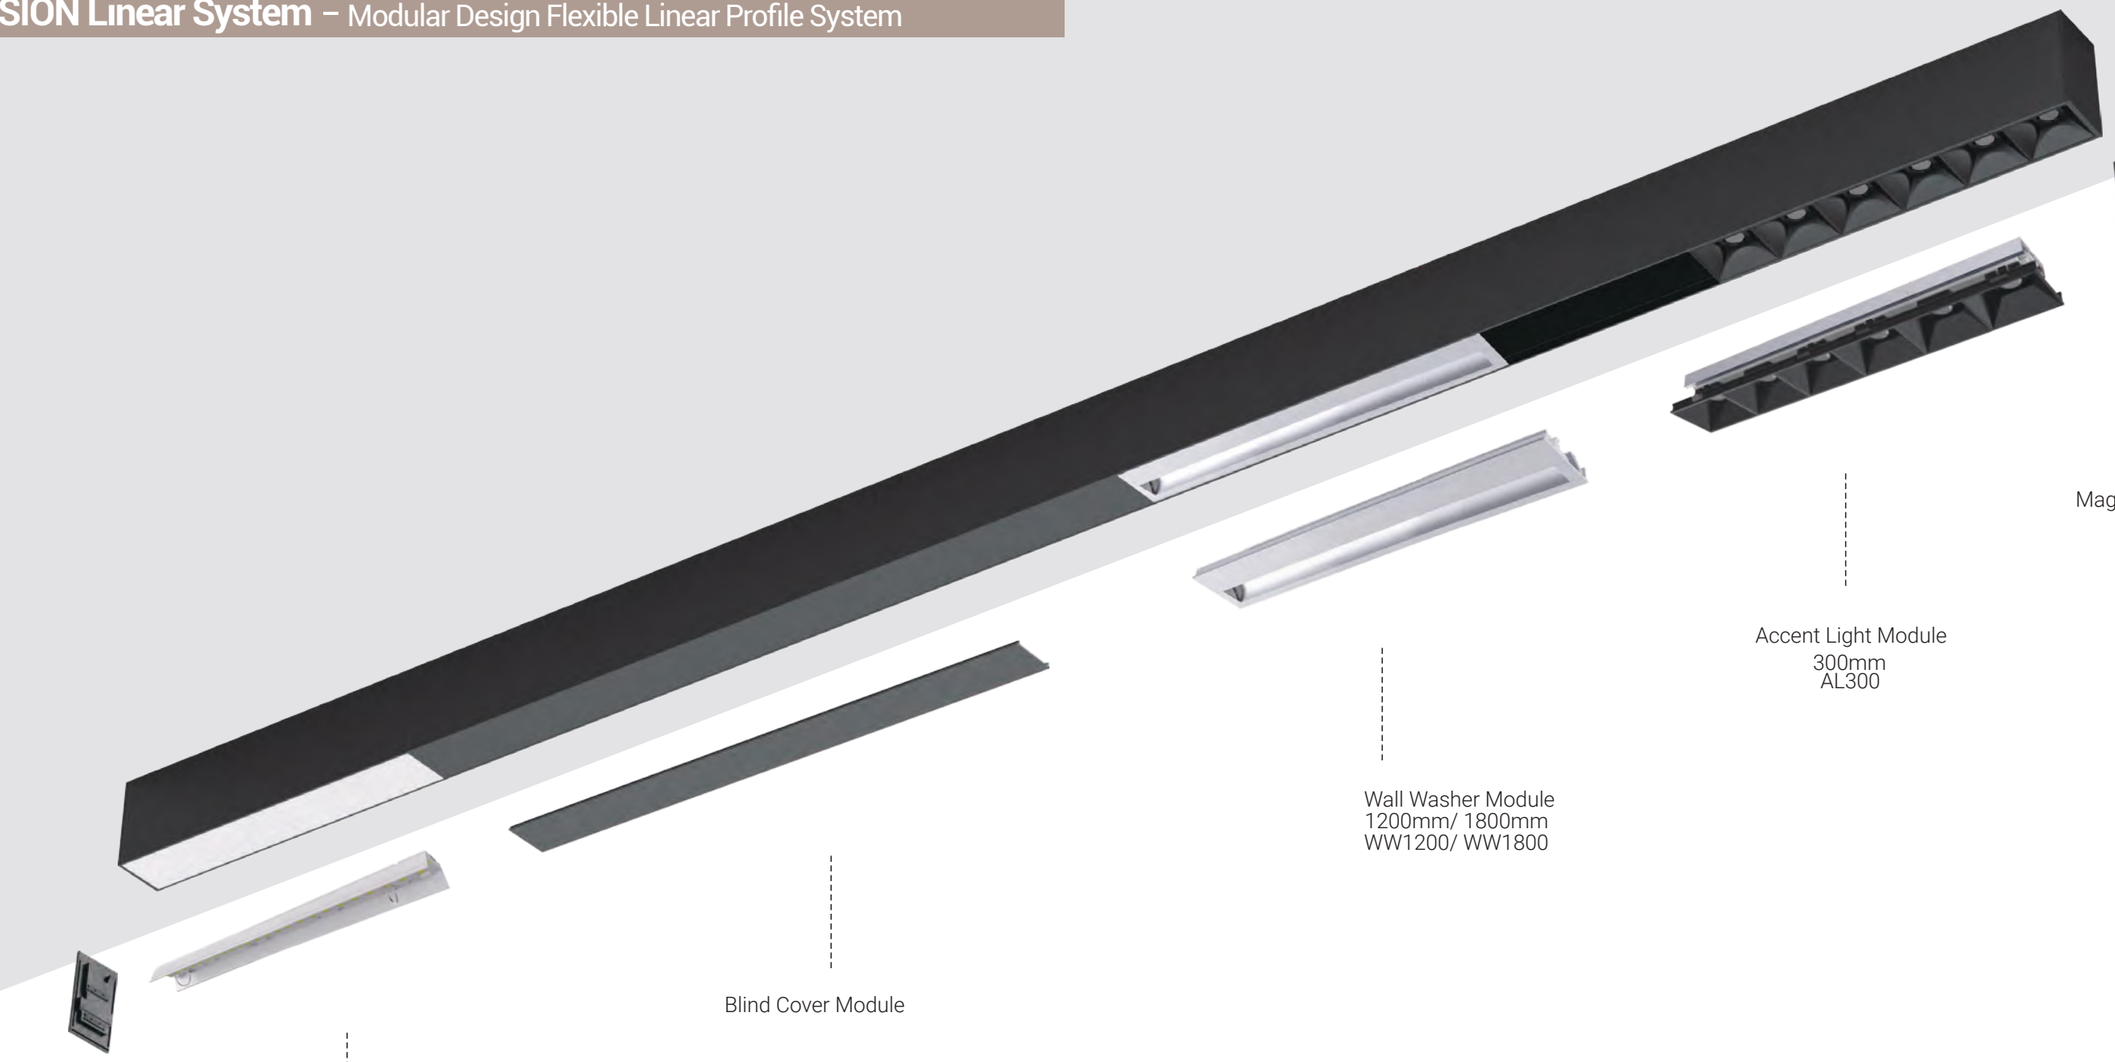

Magnetic End Cap

Accent Light Module
300mm
AL300

Wall Washer Module
1200mm/ 1800mm
WW1200/ WW1800

Blind Cover Module


General Light Module
600mm
GL600

Magnetic End Cap


- Schönes Profilsystem aus Aluminiumdruckguss und mit 50 mm Breite
- Verschiedenste Lichtmodule für beste und individuelle Lichtlösungen
- Akzent-, Allgemein- und Spotbeleuchtung - auch Wall washer Modul vorhanden
- Komplett werkzeuglose MontageStandard und kundenspezifische Längen
- Magnetische Endkappen-keine Schrauben sichtbar

- Profile system made of extruded aluminium with 50mm width,
- Various lighting modules with multiple lighting applications.
- General light, accent light, wall washer and spotlight module for choice.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover for high precise system.
- Magnetic end cap without fixing screws.

FUSION Linear System – Modular Design Flexible Linear Profile System

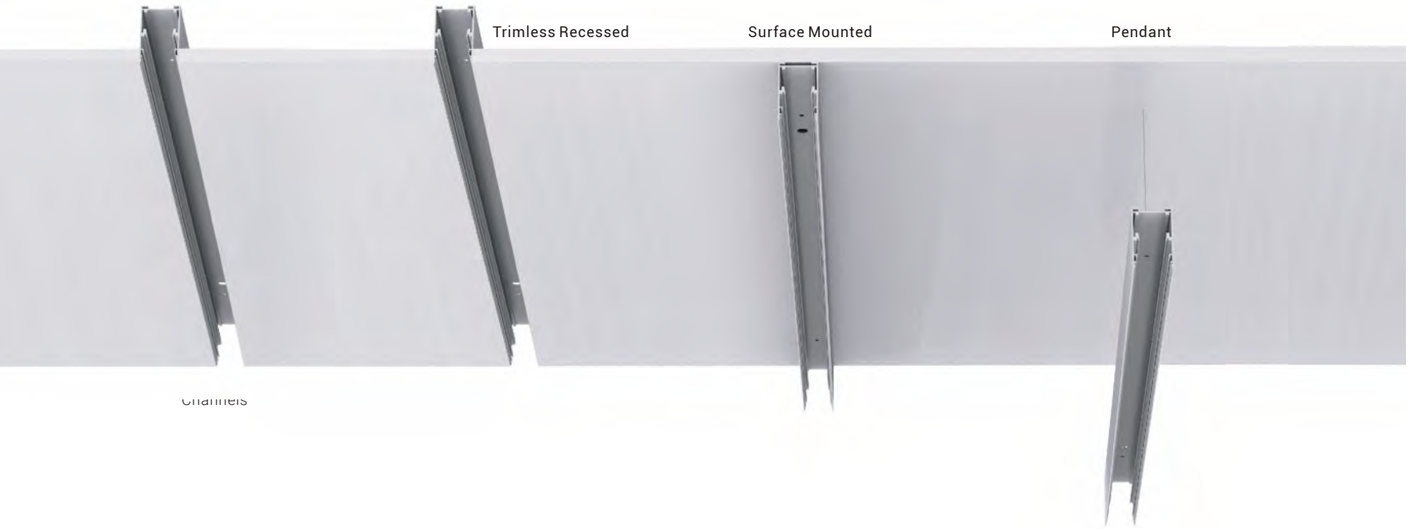

Inserts

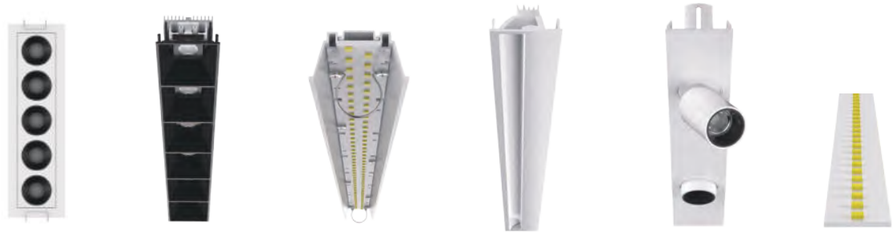

FUSION Module (FF/ FW/ FS/ FG)

Accent Light Module (300mm)

General Light Module (600mm)

Wall Washer Module (1200mm/1800mm)

Spot Light Module (300mm)

Uplight Module (1070mm/ 1605mm)

Covers




Blind Cover

Opal Cover

Flexible Opal Cover

Mounting Kits

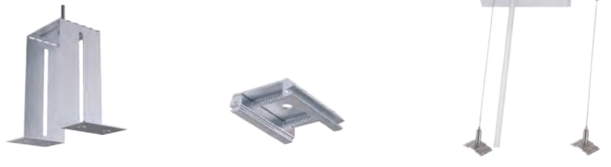


Recessed Mounting Kit (2pcs/ Set)


Surface Mounted Kit (2pcs/ Set)

Pendant Kit (Ceiling Box in White/ Black)

Corner Modules and Linear Connector

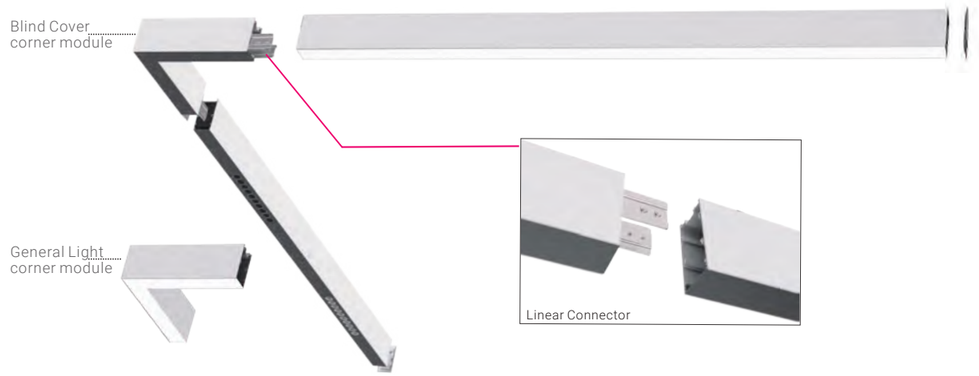

System details

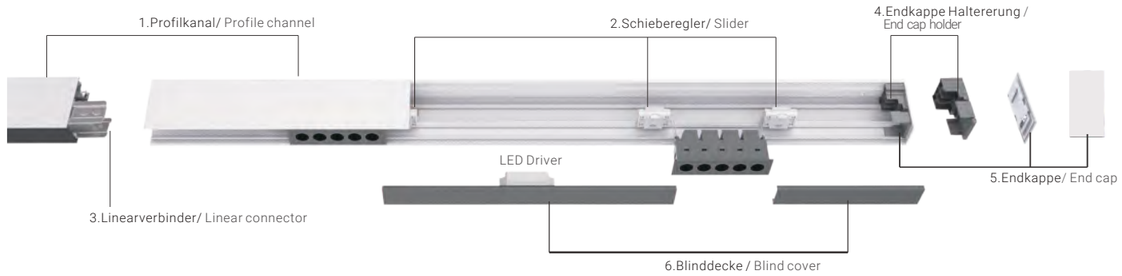




Intelligentes Linear-Profildesign
Einfachste Installation der Fusion-Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install fusion downlight into profile channel

FUSION Linear System – Modular Design Flexible Linear Profile System

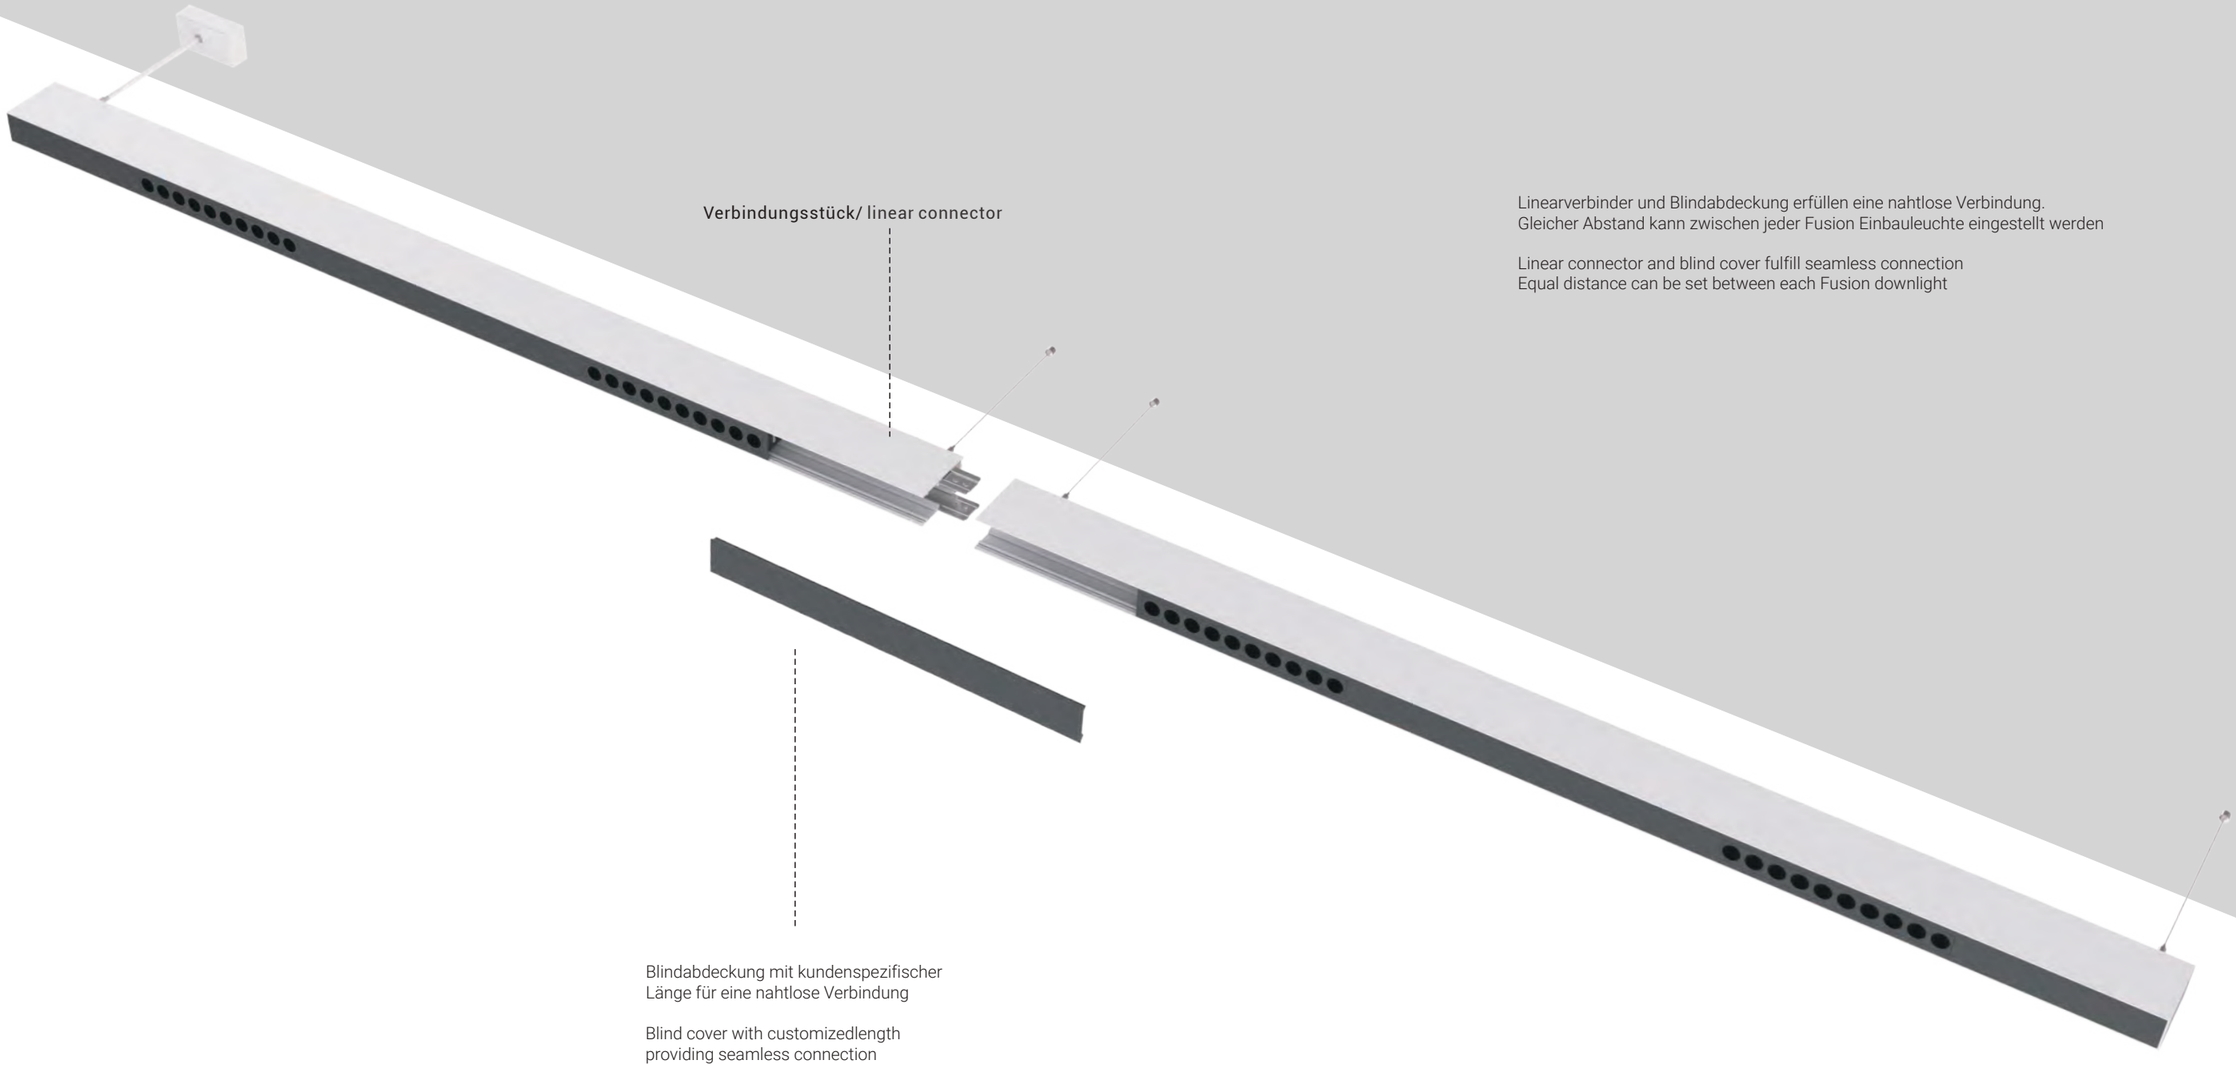

Linearverbinder und Blindabdeckung erfüllen eine nahtlose Verbindung.
Gleicher Abstand kann zwischen jeder Fusion Einbauleuchte eingestellt werden

Linear connector and blind cover fulfill seamless connection
Equal distance can be set between each Fusion downlight

Blindabdeckung mit kundenspezifischer
Länge für eine nahtlose Verbindung

Blind cover with customizedlength
providing seamless connection




FUSION Linear System – General Light Module



105° | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Linkable General Light Module
- General Light Version also Available
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 1900lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim





Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	46V	250mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
16W	18W	46V	300mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


FUSION Linear System – Wall Washer Light Module




Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Wall Wash Light Module
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim





Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
				90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
				90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-1S-4W Adjustable Spotlight Module




15° 30° 55° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP40 CE CB CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 4W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 420lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

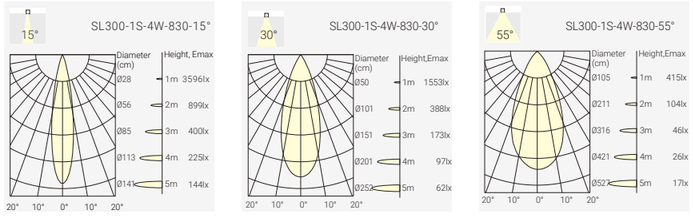

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12 V	350mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°N
						30°	470lm	350lm	SL300-1S-4W-827-30°N
						55°	470lm	350lm	SL300-1S-4W-827-55°N
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15°N
						30°	500lm	380lm	SL300-1S-4W-830-30°N
						55°	500lm	380lm	SL300-1S-4W-830-55°N
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°N
						30°	550lm	420lm	SL300-1S-4W-840-30°N
						55°	550lm	420lm	SL300-1S-4W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-2S-8W Adjustable Spotlight Module




15° 30° 55° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP40 CE CB CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 8W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 750lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

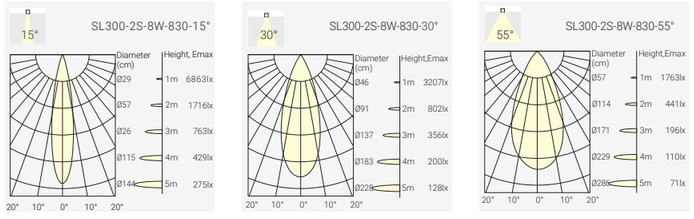

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	24 V	350mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N
						30°	850lm	650lm	SL300-2S-8W-827-30°N
						55°	850lm	650lm	SL300-2S-8W-827-55°N
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N
						30°	900lm	700lm	SL300-2S-8W-830-30°N
						55°	900lm	700lm	SL300-2S-8W-830-55°N
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N
						30°	950lm	750lm	SL300-2S-8W-840-30°N
						55°	950lm	750lm	SL300-2S-8W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL450-3S-13W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 1100lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K Per Single Spot:

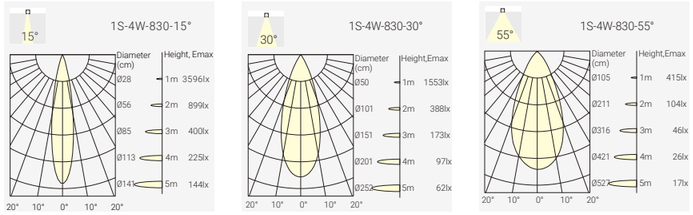

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36 V	350mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – AL300-13W Accent Light Module





15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

CE | CB | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Accent Light Module
- OSRAM LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 1300lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 1-10V Dim, DALI Dim





Light Distribution

3000K

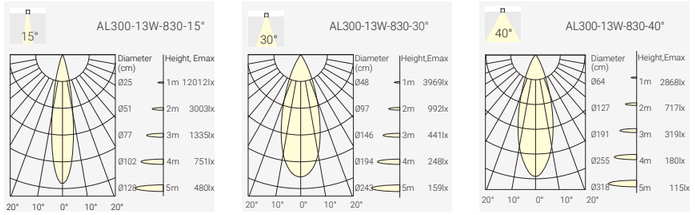

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18 V	700mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – UL1200-11W/ UL1800-16W Uplight Module




110° | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Uplight Module
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 2400lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim





Light Distribution

3000K Per Single Spot:



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	46 V	250mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°N
					3000K	110°	1800lm	1600lm	UL1200-11W-830-110°N
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°N
16W	18W	46 V	350mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°N
					3000K	110°	2500lm	2200lm	UL1800-16W-830-110°N
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



FUSION Linear System – Linear Downlight Profile System



24° 40° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19 IP20 CE CB OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- Linear Accent Light Profile System
- OSRAM LED: 44W, 22W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40° (FUSION G2 in 15°, 24°, 48°, 60°)
- Lumen Output: Up to 3800lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
44W	48W	31+31V	700mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82724F-BB
						40°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82740F-BB
					3000K	24°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83024F-BB
						40°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83040F-BB
					4000K	24°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84024F-BB
						40°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84040F-BB
22W	26W	16+16V	700mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82724F-BB
						40°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82740F-BB
					3000K	24°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83024F-BB
						40°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83040F-BB
					4000K	24°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84024F-BB
						40°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84040F-BB

Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Project: TEM Head Office, Čatež, Slovenia


FUSION Linear System – Linear General Light Profile System






Quick Info

- Linear General Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90,
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 5500lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(X)-GL1800-36W-827A1F-BN
					3000K	105°	4800lm	3600lm	1800mm	FL1800(X)-GL1800-36W-830A1F-BN
					4000K	105°	5000lm	3800lm	1800mm	FL1800(X)-GL1800-36W-840A1F-BN
48W	52W	46V	700+350mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(X)-GL1800-52W-827A1F-BN
					3000K	105°	6400lm	5200lm	1800mm	FL1800(X)-GL1800-52W-830A1F-BN
					4000K	105°	7000lm	5500lm	1800mm	FL1800(X)-GL1800-52W-840A1F-BN
22W	26W	46V	500mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(X)-GL1200-26W-827A1F-BN
					3000K	105°	3400lm	2700lm	1200mm	FL1200(X)-GL1200-26W-830A1F-BN
					4000K	105°	3600lm	2900lm	1200mm	FL1200(X)-GL1200-26W-840A1F-BN
32W	36W	46V	700mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(X)-GL1200-36W-827A1F-BN
					3000K	105°	4400lm	3600lm	1200mm	FL1200(X)-GL1200-36W-830A1F-BN
					4000K	105°	4800lm	3800lm	1200mm	FL1200(X)-GL1200-36W-840A1F-BN

Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Catalina Bay,New Zealand



FUSION Linear System – Linear Wall Washer Light Profile System



Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Linear Wall Washer Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(X)-WW1800-36W-827WWF-BN
					3000K	WW	4800lm	2700lm	1800mm	FL1800(X)-WW1800-36W-830WWF-BN
					4000K	WW	5000lm	2900lm	1800mm	FL1800(X)-WW1800-36W-840WWF-BN
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(X)-WW1800-52W-827WWF-BN
					3000K	WW	6400lm	3500lm	1800mm	FL1800(X)-WW1800-52W-830WWF-BN
					4000K	WW	6600lm	3700lm	1800mm	FL1800(X)-WW1800-52W-840WWF-BN
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(X)-WW1200-26W-827WWF-BN
					3000K	WW	3400lm	1800lm	1200mm	FL1200(X)-WW1200-26W-830WWF-BN
					4000K	WW	3600lm	1900lm	1200mm	FL1200(X)-WW1200-26W-840WWF-BN
32W	36W	46V	700mA	80	2700K	WW	4200lm	2300lm	1200mm	FL1200(X)-WW1200-36W-827WWF-BN
					3000K	WW	4400lm	2500lm	1200mm	FL1200(X)-WW1200-36W-830WWF-BN
					4000K	WW	5000lm	2700lm	1200mm	FL1200(X)-WW1200-36W-840WWF-BN


Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: School, Uruguay



FUSION Linear System – Linear Accent Light Profile System

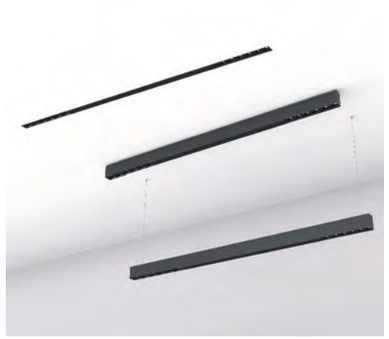

15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Linear Accent Light Profile System
- OSRAM LED: 26W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 2600lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K


Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1200mm	FL1200(X)-2*AL300-30W-84040F-BB
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1500mm	FL1500(X)-2*AL300-30W-84040F-BB

Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Skyline Hill, Germany

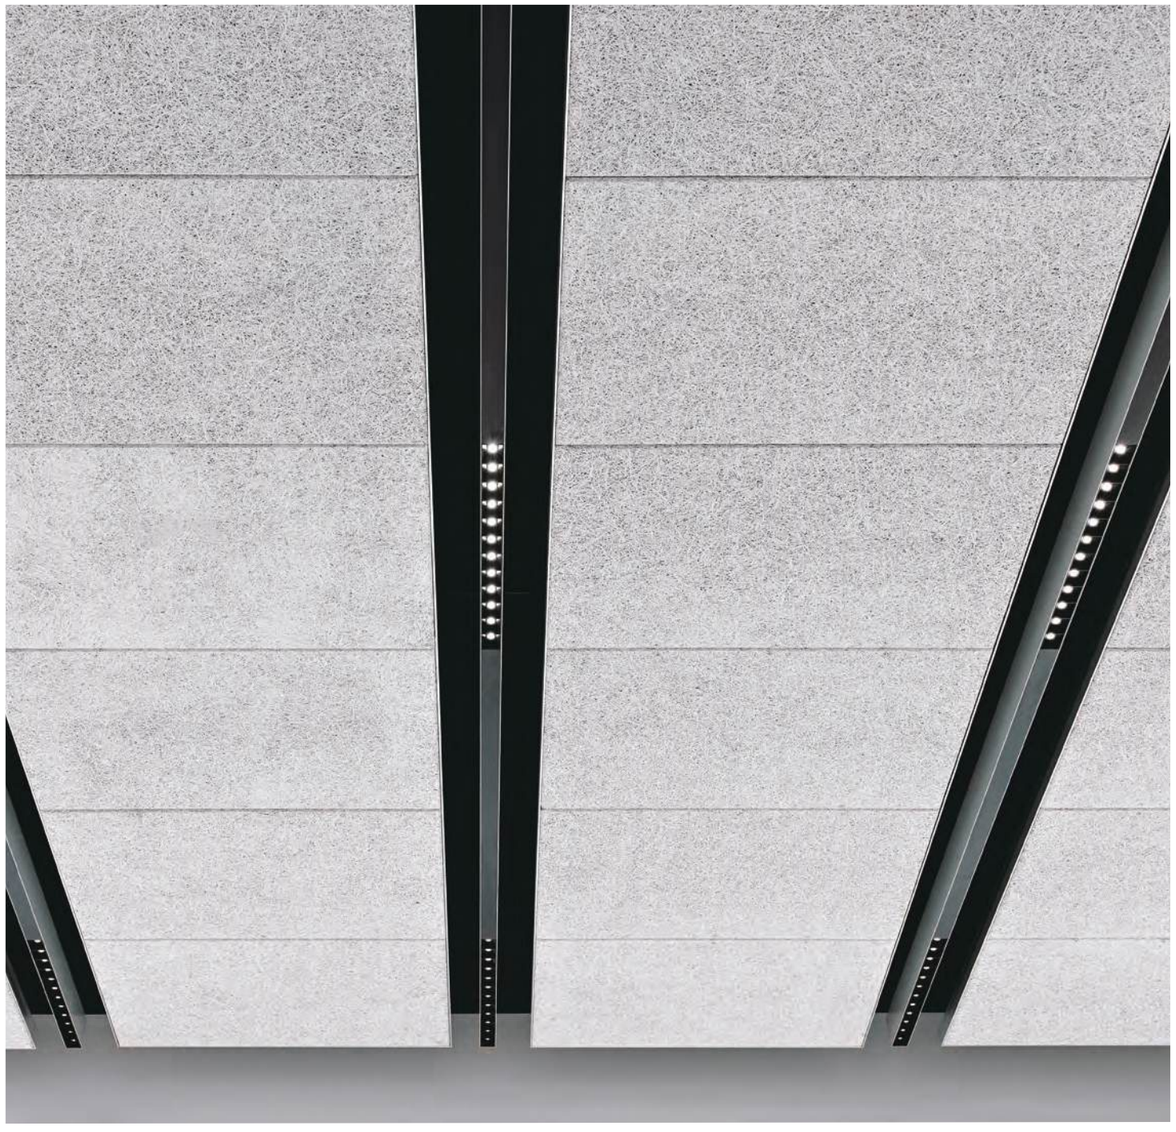

FUSION Linear System – Linear General Light & Accent Light Profile System






Quick Info

- Linear General Light & Accent Light Profile System
- SAMSUNG LED, OSRAM LED: 37W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°+105°, 30°+105°, 40°+105°
- Lumen Output: Up to 3300lm-4000lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

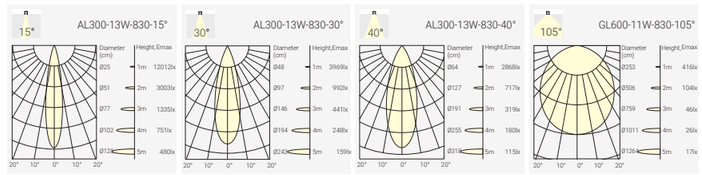

Order Info (in Black Housing as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
37W	41W	47 V	700mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82715F-BB
						30°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82730F-BB
						40°+105°	4500lm	3500lm	FL1200(X)-2*AL300+GL600-41W-82740F-BB
					3000K	15°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83015F-BB
						30°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83030F-BB
						40°+105°	4700lm	3700lm	FL1200(X)-2*AL300+GL600-41W-83040F-BB
					4000K	15°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84015F-BB
						30°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84030F-BB
						40°+105°	5100lm	4000lm	FL1200(X)-2*AL300+GL600-41W-84040F-BB

Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Office Shire House, U.K.



FUSION Linear System – Modular Design Flexible Linear Profile System

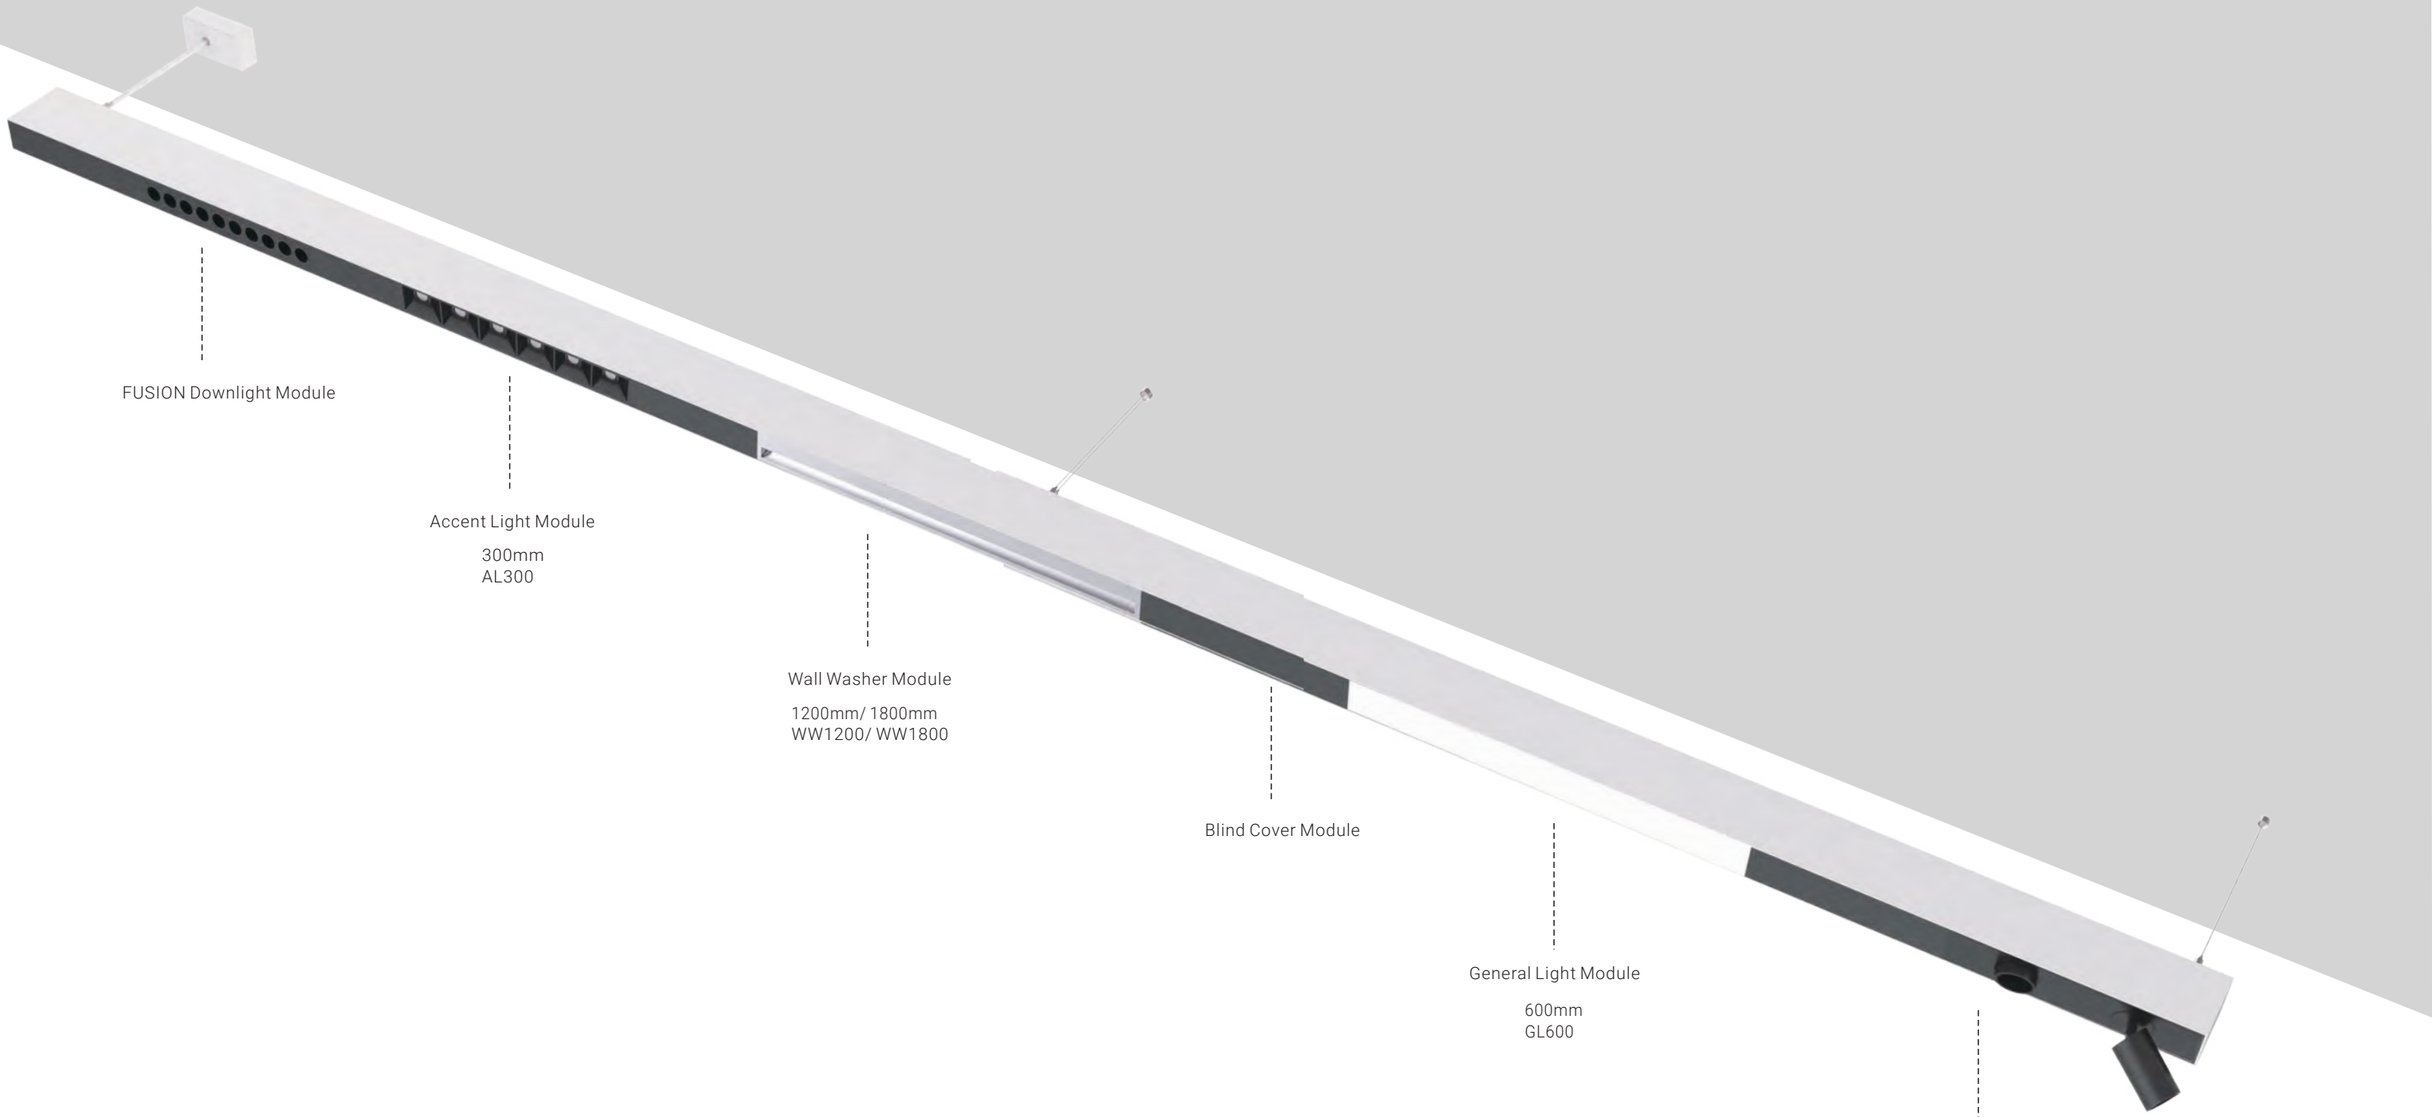

Linear System with more modules combination available.
All available with Suspended, surface mounted and recessed mounted versions.

SPACE 60

Ideal Profile System for Office Lighting Profile-based Basic Lighting




SPACE 60 – Linear System

SPACE 60 is an ideal profile system for any office lighting project, thanks to its wide range of configuration options. The profile is specially made with a 65mm width to ensure strict glare control (UGR<19) and homogeneous lighting. Available profile lengths include 600mm, 900mm, 1200mm, 1500mm, and 1800mm, which can be used individually or connected continuously to meet different spatial needs. Combined with L-shaped, T-shaped, and X-shaped modules, SPACE 60 opens up more possibilities for optimal integration in every project.


LENGTHS:




MOUNTINGS:

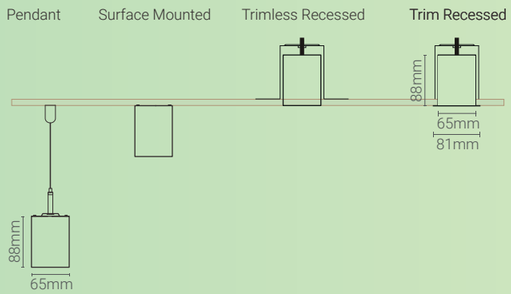

CORNER MODULES:

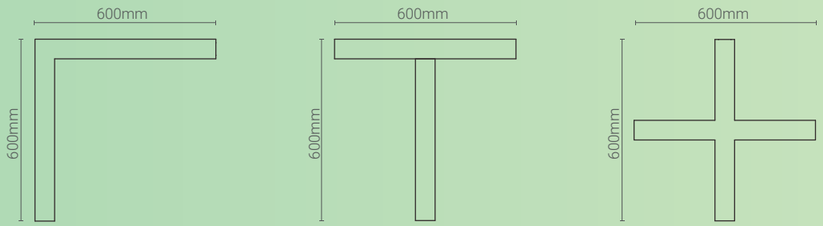




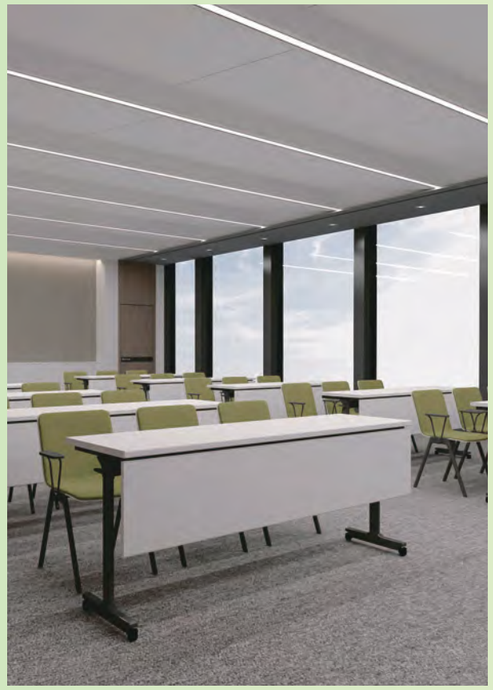



SPACE 60 – Linear System

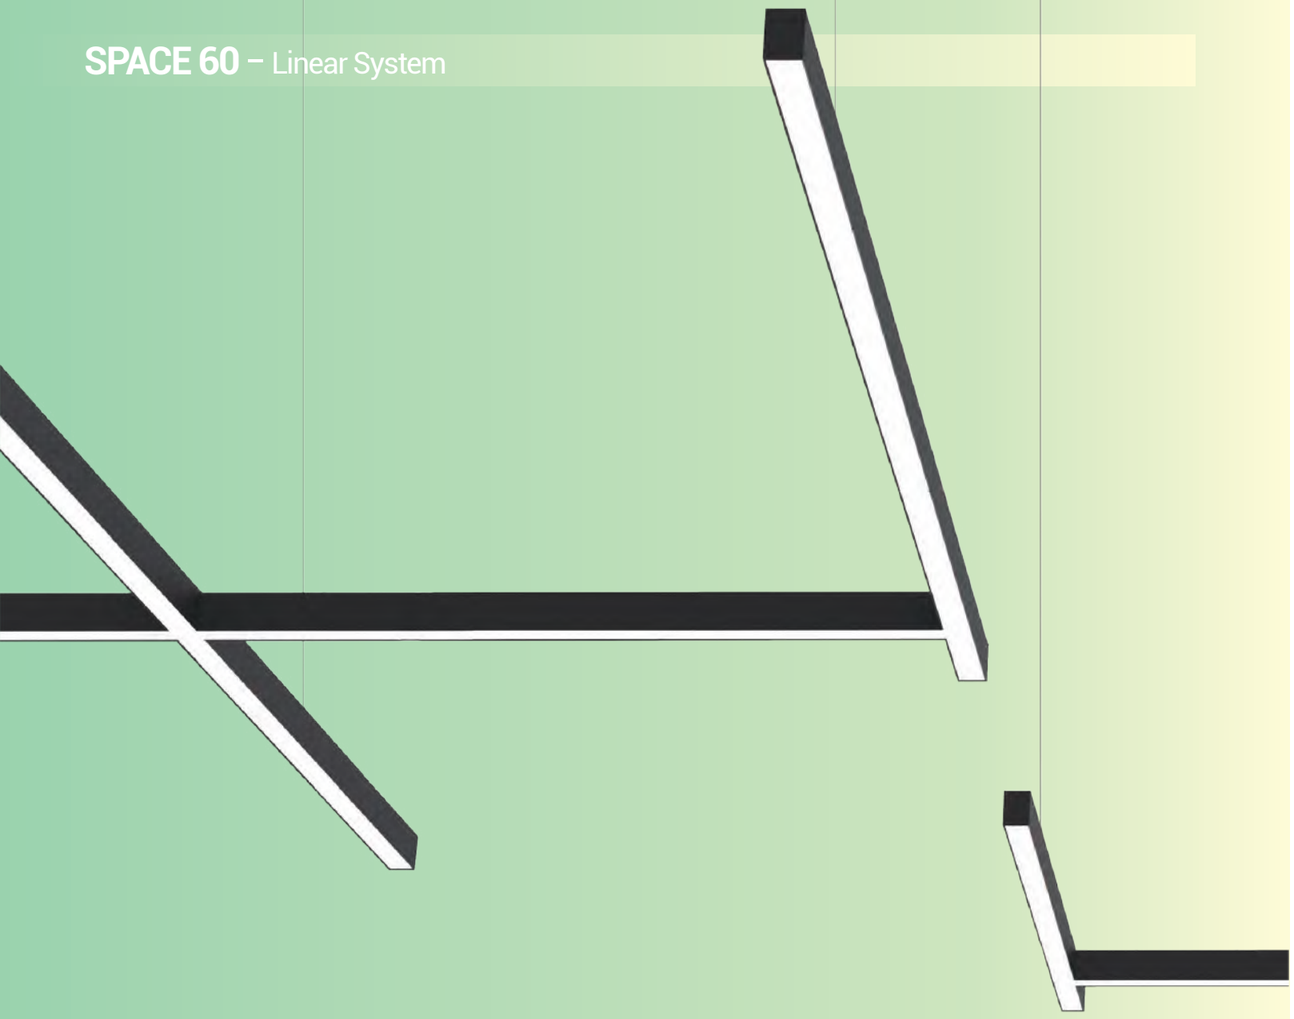

SPACE 60 standard version features a microprismatic cover to enhance visual comfort (UGR<19) combined with homogeneous lighting. Opal cover version is available as an option, offering even lighting and a wider beam angle (UGR<22).

Besides its elegant appearance, its detail-oriented design makes it favored by designers, electricians and users. All the profile connection joints and profile end caps (NO visible screw) are designed with anti-leakage measures, ensuring optimal & clean light performance. All profiles are equipped with quick-connectors, allowing for fast, easy installation and maintenance.

Mounting options include pendant direct, pendant direct & indirect, surface-mounted, trimless recessed & trim recessed. The LED driver, available in either ON-OFF or DALI Dim, is integrated into the light channel. Other dimming LED drivers are also available on demand.

It's elegant appearance and detail-oriented design make SPACE 60 an ideal profile system for office lighting or any profile-based basic lighting



Product Features



Microprismatic cover for visual comfort (UGR<19)



No visible screw




Perfect joints, no light gaps



Quick Linear Connector



Twist-lock design light module, easy installation & maintenance

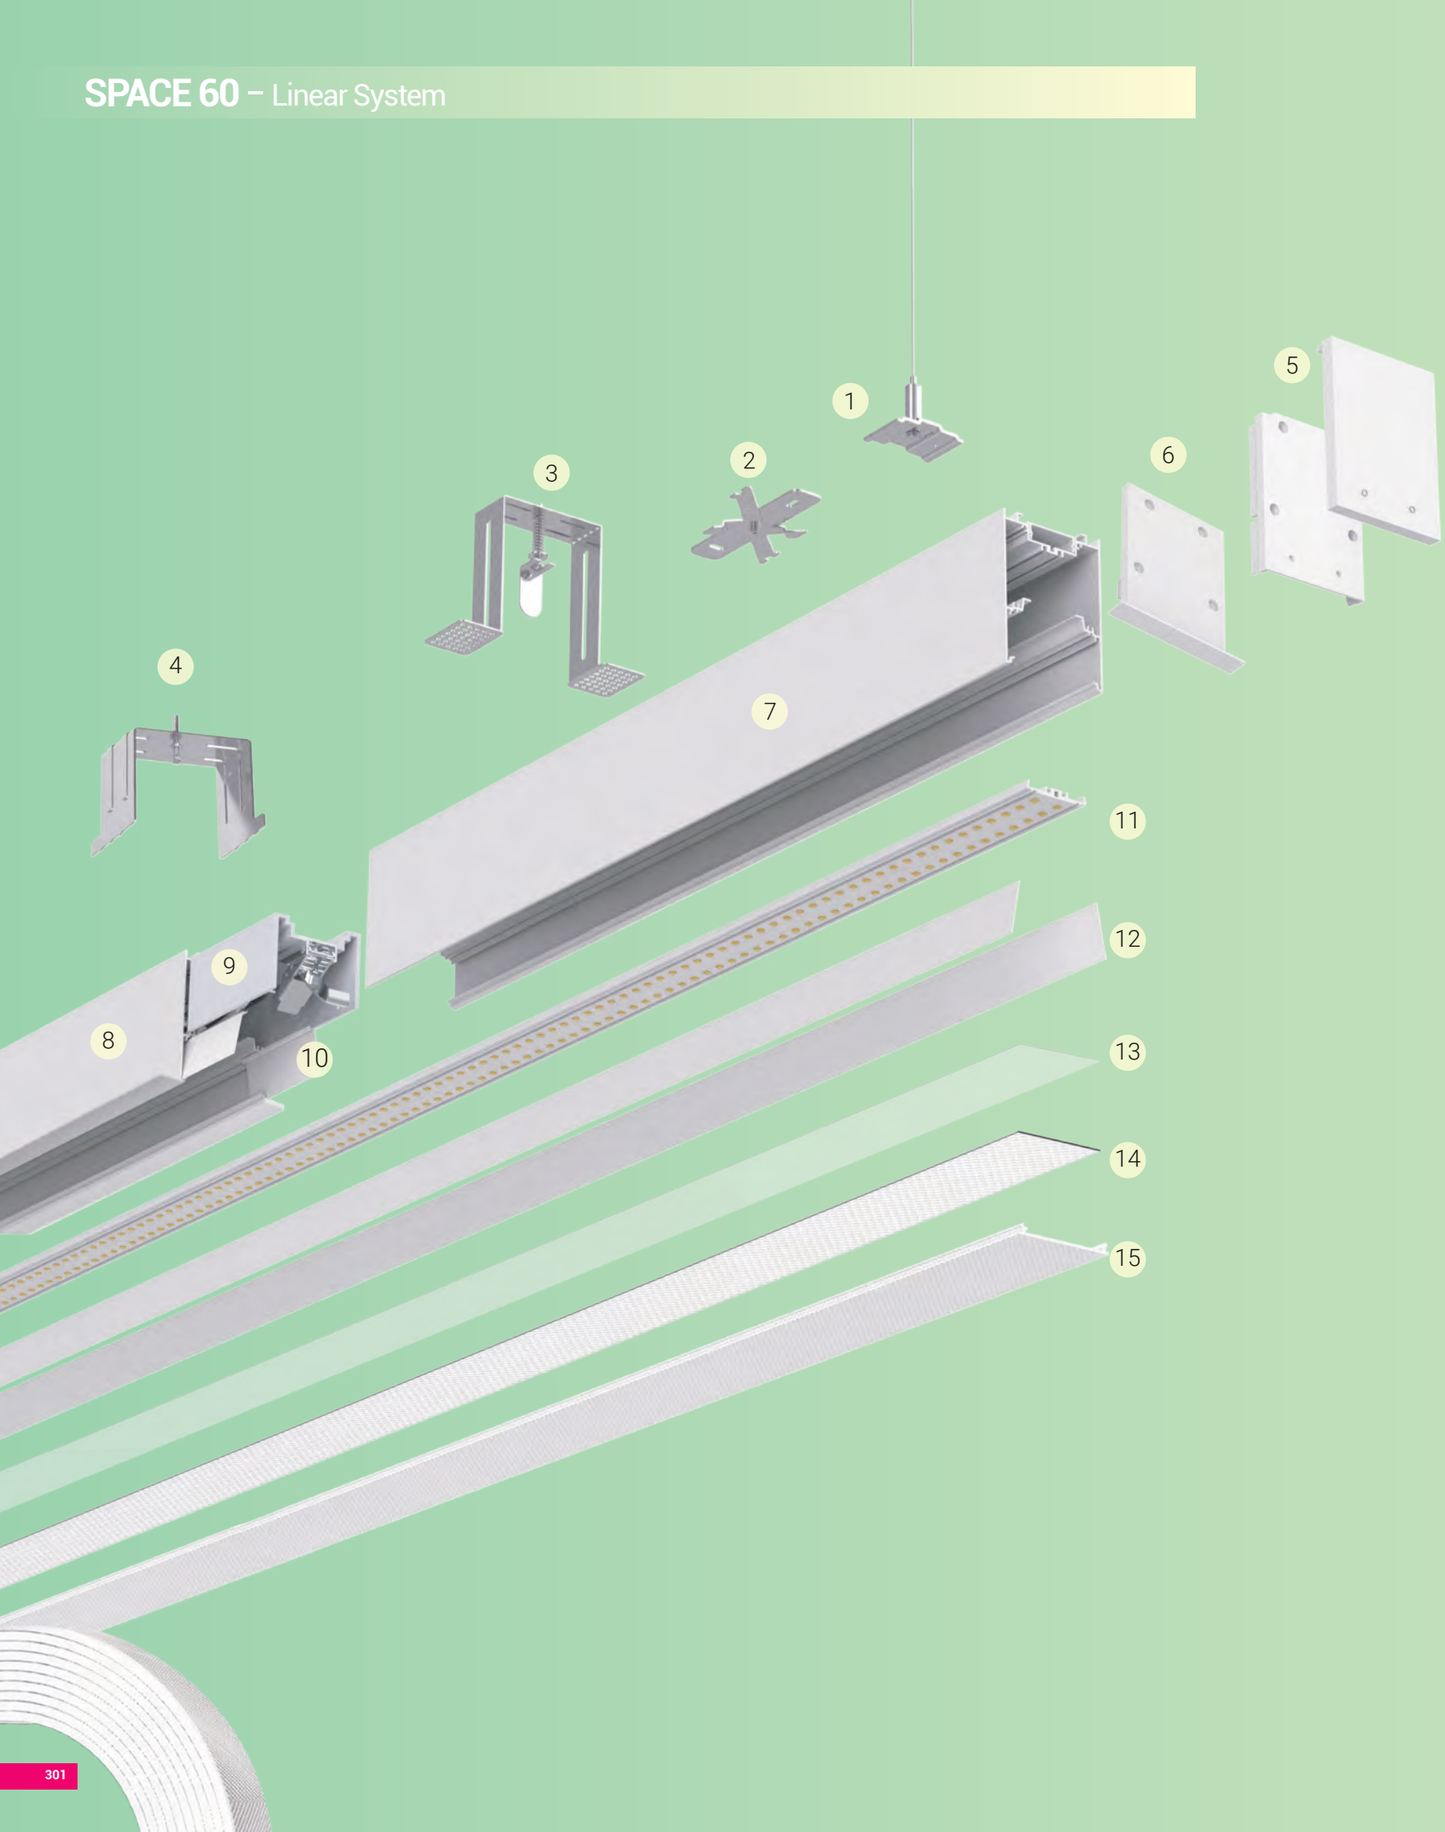

Construction

1. Pendant Insallation Steel Wire Kit
2. Surface Mounted Installation Brackets
3. Trimless Recessed Installation Brackets
4. Trim Recessed Installation Brackets
5. End Cap Set without Trim (no light leakage, no visible screw)
6. End Cap with Trim
7. Profile Channel without Trim
8. Profile Channel with Trim
9. Quick Linear Connector
10. Light Leakage Prevention Cover
11. LED Module
12. Light Reflection Film
13. Opal Diffuser Film
14. Microprismatic Film
15. Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
    30 meters per run, in-field cuttable

SPACE 60 – Linear System



UGR<19


SPACE 60 Linear System

· The profile is specially made with a 65mm width together with clever triple-layer optical design to ensure strict glare control (UGR<19), homogeneous lighting and efficiency.
· High quality surface treatment
· The end cap is no visible screw
·Quick-connector allows fast connection


Visual comfort



UGR<19



Photometric curves of
SPACE 60 P-CL1500U-47W-840-80°↑105°↓

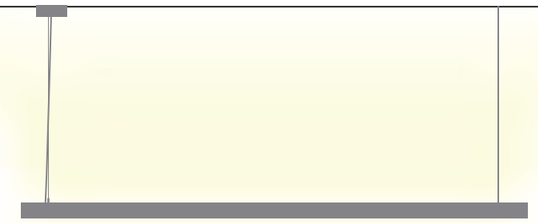





SPACE 60 – Linear System

Project: Nardo Bil Ålesund, Norway



Project: Janashakthi Group's corporate office, Sri Lanka




SPACE 60 – Pendant Direct & Indirect



105° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 21W, 31W, 38W, 47W, 58W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓105°↑
- Lumen Output: Up to 7000lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
19W	21W	33V	600mA	614mm	White	80	4000K	80°↓105°↑	1450lm↓1100lm↑	SE6M-8408021F-WN-U
29W	31W	33V	900mA	914mm	White	80	4000K	80°↓105°↑	2300lm↓1400lm↑	SE9M-8408031F-WN-U
35W	38W	33V	1050mA	1214mm	White	80	4000K	80°↓105°↑	2750lm↓1800lm↑	SEAP-8408038F-WN-U
43W	47W	33V	1300mA	1514mm	White	80	4000K	80°↓105°↑	3400lm↓2200lm↑	SEBP-8408047F-WN-U
52W	58W	33V	1600mA	1814mm	White	80	4000K	80°↓105°↑	4200lm↓2800lm↑	SECP-8408058F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


SE6M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80°↓	**21** 21W	**F** On-Off	**w** White	**N** None	**U** Uplight
SE9M 900mm Module	**840** CRI80/ 4000K	**80** 80°↓105°↑	**31** 21W	**A** 1-10V Dim	**B** Black		
SEAP Pendant 1200mm	**930** CRI90/ 3000K		**38** 38W	**D** DALI Dim			
SEBP Pendant 1500mm	**940** CRI90/ 4000K		**47** 47W				
SECP Pendant 1800mm			**58** 58W				



SPACE 60 – Pendant Direct






80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Light Version also Available
- Lumileds LED: 13W, 21W, 26W, 33W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1450lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2300lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2850lm	SEAP-8408026F-WN
30W	33W	33V	900mA	1514mm	White	80	4000K	80° ↓	3650lm	SEBP-8408033F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	4300lm	SECP-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SE6M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9M 900mm Module	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAP Pendant 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBP Pendant 1500mm	**940** CRI90/ 4000K		**33** 33W				
SECP Pendant 1800mm			**39** 39W				




SPACE 60 – Surface Mounted




Quick Info


- ••General Light Version also Available
- Lumileds LED: 13W, 21W, 26W, 33W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1450lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2300lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2850lm	SEAC-8408026F-WN
30W	33W	33V	900mA	1514mm	White	80	4000K	80° ↓	3650lm	SEBC-8408033F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	4300lm	SECC-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SE6M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9M 900mm Module	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAC Surface Mounted 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBC Surface Mounted 1500mm	**940** CRI90/ 4000K		**33** 33W				
SECC Surface Mounted 1800mm			**39** 39W				




SPACE 60 – Trim Recessed



80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- Lumileds LED: 13W, 21W, 26W, 33W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

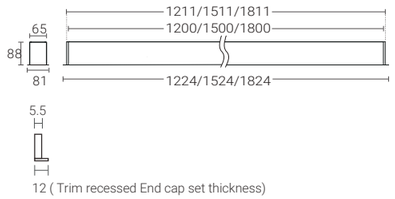

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	624mm	White	80	4000K	80° ↓	1450lm	SE6F-8408013F-WN
19W	21W	33V	600mA	924mm	White	80	4000K	80° ↓	2300lm	SE9F-8408021F-WN
23W	26W	33V	700mA	1224mm	White	80	4000K	80° ↓	2850lm	SEAF-8408026F-WN
30W	33W	33V	900mA	1524mm	White	80	4000K	80° ↓	3650lm	SEBF-8408033F-WN
35W	39W	33V	1050mA	1824mm	White	80	4000K	80° ↓	4300lm	SECF-8408039F-WN


Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SE6F – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6F Trim Recessed 600mm	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9F Trim Recessed 900mm	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAF Trim Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBF Trim Recessed 1500mm	**940** CRI90/ 4000K		**33** 33W				
SECF Trim Recessed 1800mm			**39** 39W				


SPACE 60 – Trimless Recessed

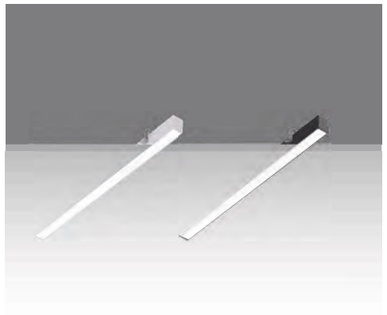

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- Lumileds LED: 13W, 21W, 26W, 33W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

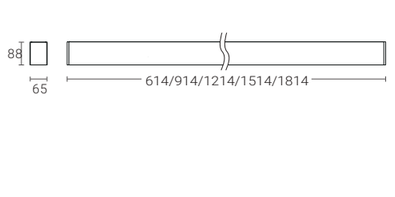

Light Distribution

3000K





Order Info


LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1450lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2300lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2850lm	SEAT-8408026F-WN
30W	33W	33V	900mA	1514mm	White	80	4000K	80° ↓	3650lm	SEBT-8408033F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	4300lm	SECT-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SE6M – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9M 900mm Module	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAT Trimless Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBT Trimless Recessed 1500mm	**940** CRI90/ 4000K		**33** 33W				
SECT Trimless Recessed 1800mm			**39** 39W				

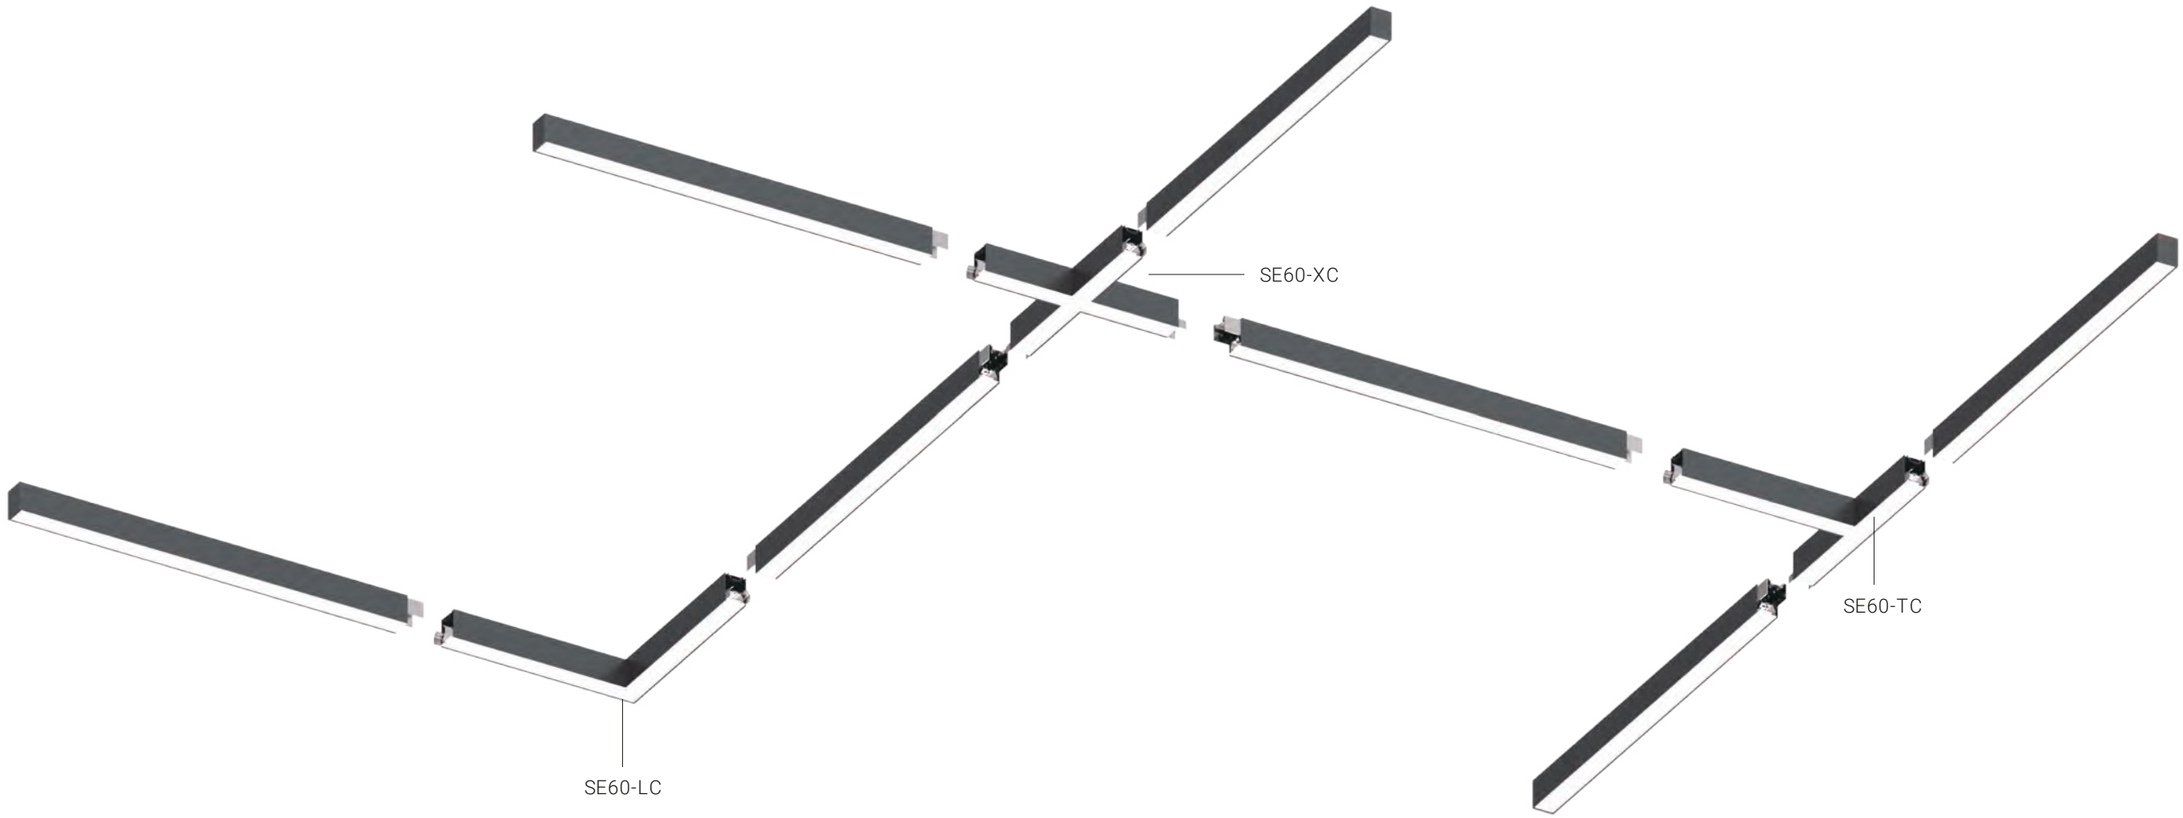

Corner Module of SPACE 60 Linear System

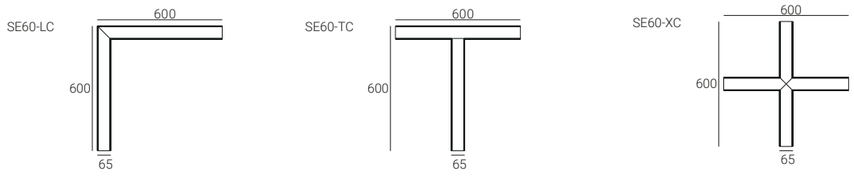

Installation Accessories

	SE60-PK	Pendant Installation Kit (with Ceiling Box)
	SE60-PWK	Pendant Steel Wire Kit (no Ceiling Box)
	SE60-SMK	Surface Mounted Kit
	SE60-HCK	Quick Linear Connector Kit
	SE60-TRK	Trimless Recessed Mounting kit
	SE60-FRK	Trim Recessed Mounting kit
	SE60-FMPC-30M SE60-FOPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll Flexible Opal Cover, in 30 Meters per Roll

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23W	26W	33V	700mA	L: 600x600mm	White	80	4000K	80°	2500lm	SELC-8408026F-WN
23W	26W	33V	700mA	T: 600x600mm	White	80	4000K	80°	2500lm	SETC-8408026F-WN
23W	26W	33V	700mA	X: 600x600mm	White	80	4000K	80°	2500lm	SEXC-8408026F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SELC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SELC SPACE 60 L Corner Module	**830** CRI80/ 3000K	**80** 80°	**26** 26W	**F** On-Off	**W** White	**N** None	
SEXC SPACE 60 T Corner Module	**840** CRI80/ 4000K			**A** 1-10V Dim	**B** Black		
SEXC SPACE 60 X Corner Module	**930** CRI90/ 3000K			**D** DALI Dim			
	940 CRI90/ 4000K						

SPACE 60 EVO

Ideal Linear System
for Office and Public Space Lighting
Customizable Lengths and Shape Modules
Independent and Continuous Lighting Options




Project: Application reference

SPACE 60 EVO – Linear System

The **SPACE 60 EVO** series is a versatile linear lighting system designed for modern offices and public spaces. The profile features a precisely engineered 60mm width to ensure strict glare control (UGR<19) and uniform illumination. Available profile lengths include 1196mm, 1476mm, and 1826mm (lengths include 3mm end cap kits on each side), which can be used individually or connected in continuous runs to accommodate different spatial requirements. Combined with L-corner, T-corner, cross-corner, and arc-corner modules, SPACE 60 EVO offers enhanced flexibility for seamless integration into any project.


Pendant and Surface-Mounted Profile Options

Standard Lengths:

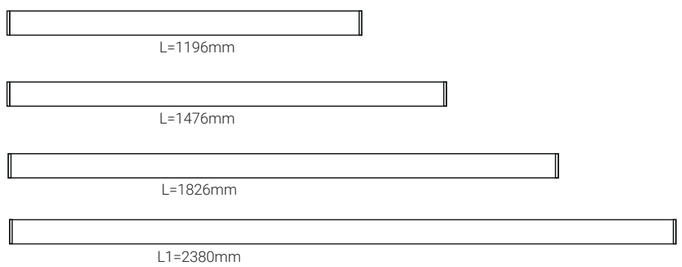





Customized Lengths Available:
Endcap Kit=2X3mm

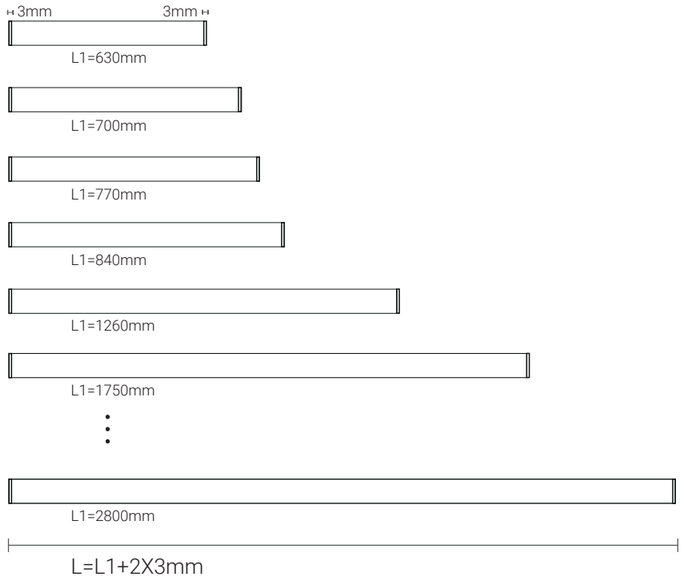

Module Lengths:



Mountings:



Corner Modules:




Trim Recessed Profile Options


New




Standard Lengths:

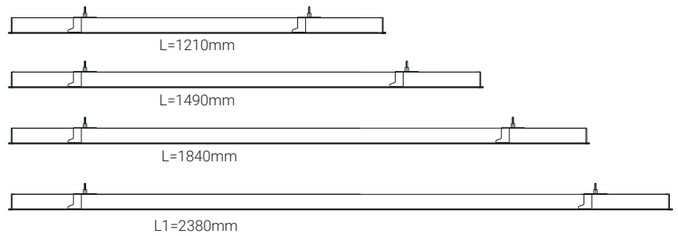


Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2X10mm

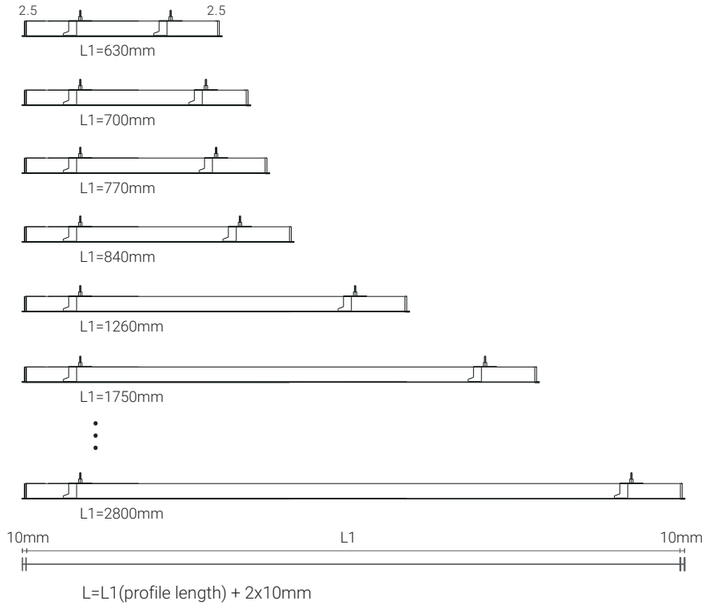

Module Lengths:




Mountings:



Cut-out length=L-10mm
Cut-out width=60mm+5mm =65mm

Corner Modules:

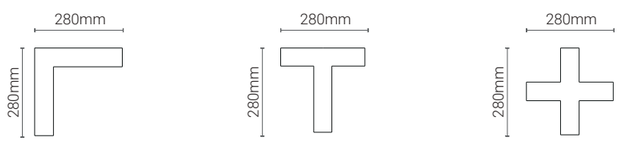

SPACE 60 EVO – Linear System


New

Designed to enrich modern office and public lighting environments, **SPACE 60 EVO Curve** expands the creative potential of linear lighting design. It seamlessly connects with the straight version of the SPACE 60 EVO system.
The Standard Curve modules are available in multiple radii — 1/2 Circle (D600/D900), 1/4 Circle (D1200/D1500/D1800/D2000), and 1/8 Circle (D2400/D3000). It enables flexible combinations to suit any space layout.


Pendant and Surface-Mounted Profile Options



Mountings:



Standard Curve:

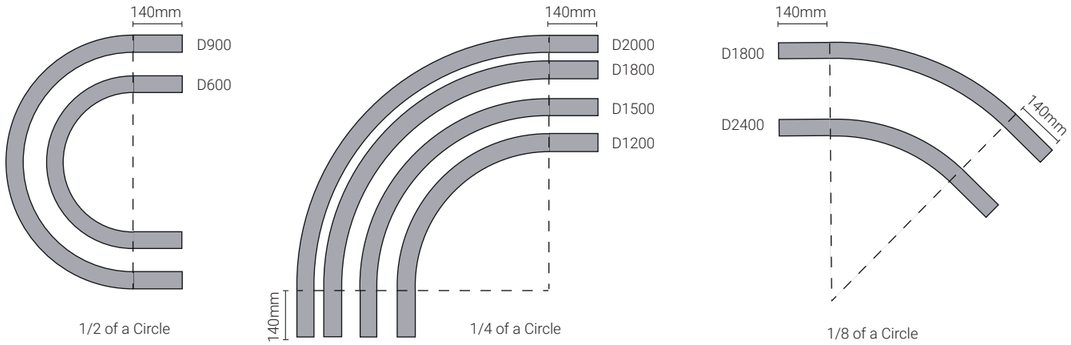


Customized Curve Available
Custom production based on your drawings is available upon request


Trim Recessed Profile Options



Mountings:




Standard Curve:

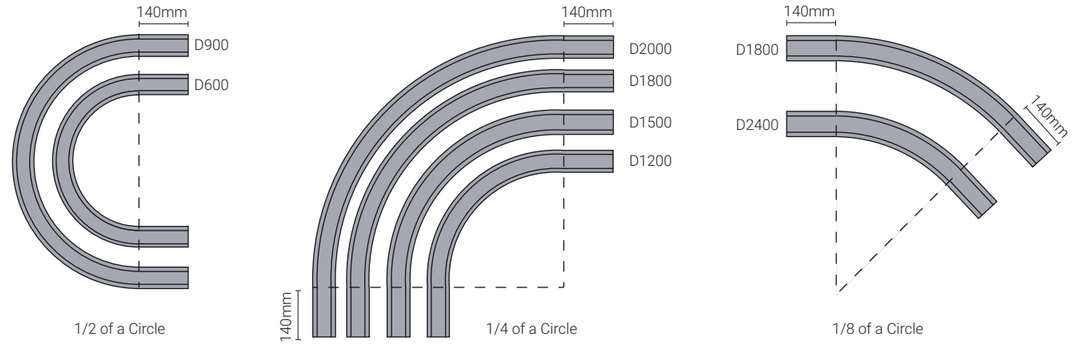

Customized Curve Available
Custom production based on your drawings is available upon request

SPACE 60 EVO – Linear System

New

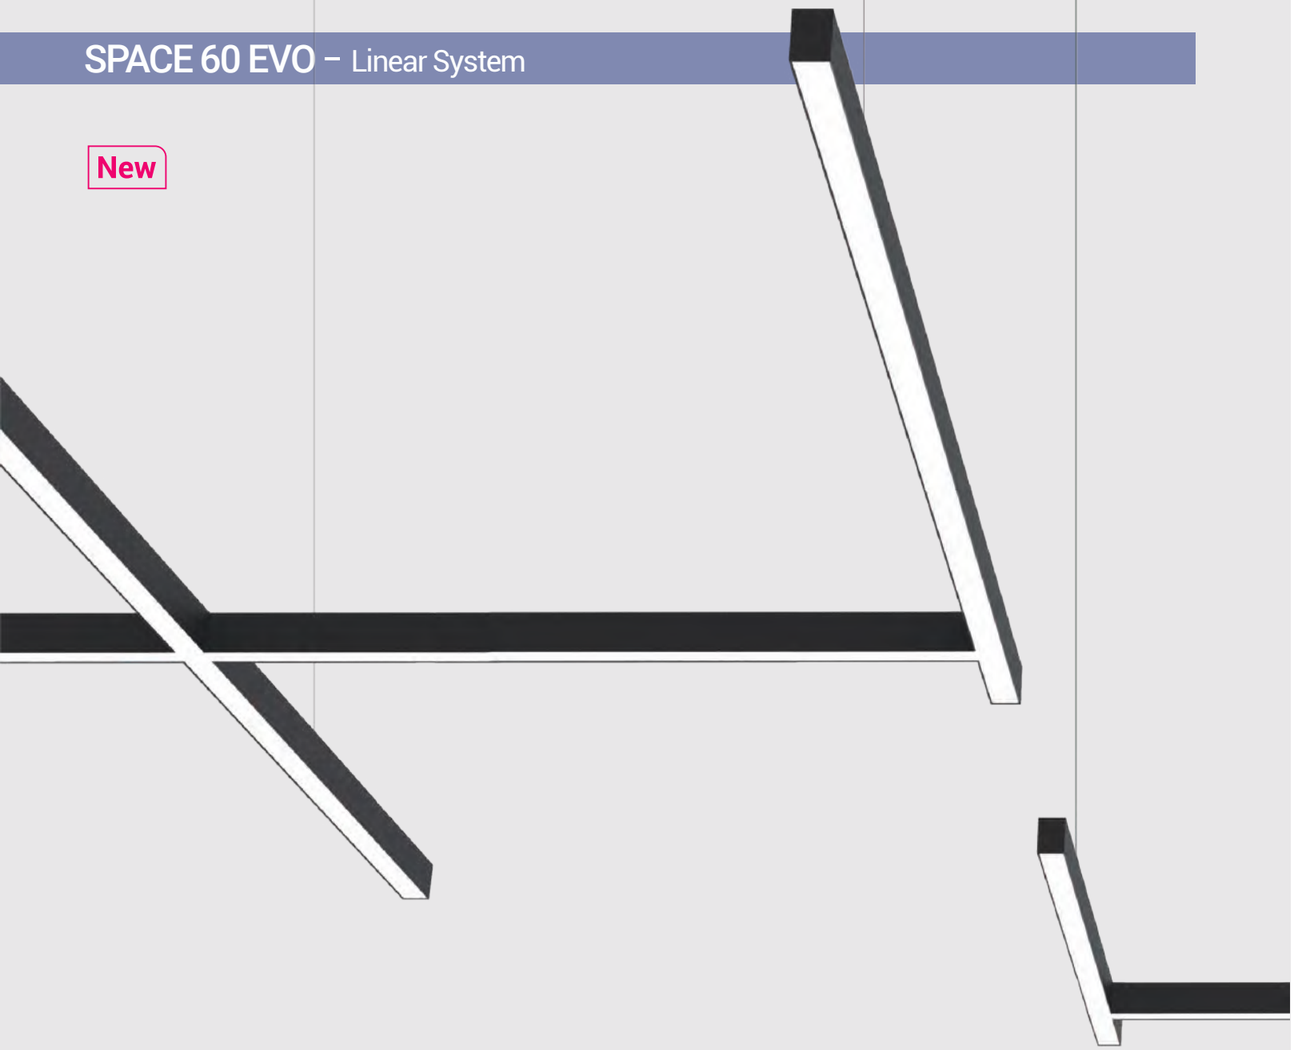


SPACE 60 EVO standard version features a microprismatic cover that enhances visual comfort (UGR<19) while providing homogeneous lighting. An opal cover version is also available as an option, offering uniform illumination and a wider beam angle (UGR<25).

Besides its elegant appearance, the detail-oriented design makes it a preferred choice among designers, electricians, and end users. All profile connection joints and end caps (with NO visible screws) are designed with anti-leakage measures to ensure optimal and clean light performance. Each profile is equipped with quick-connectors for fast and easy installation and maintenance.

Mounting options include pendant direct, pendant direct & indirect,surface-mounted, and trim-recessed installations. The LED driver—available in ON-OFF or DALI dimming versions—is integrated into the aluminium channel. Other dimming driver options are also available upon request.

Its elegant appearance and precision design make SPACE 60 EVO an ideal
profile system for office lighting or any profile-based general lighting application.

Quick Connector for Fast Installation

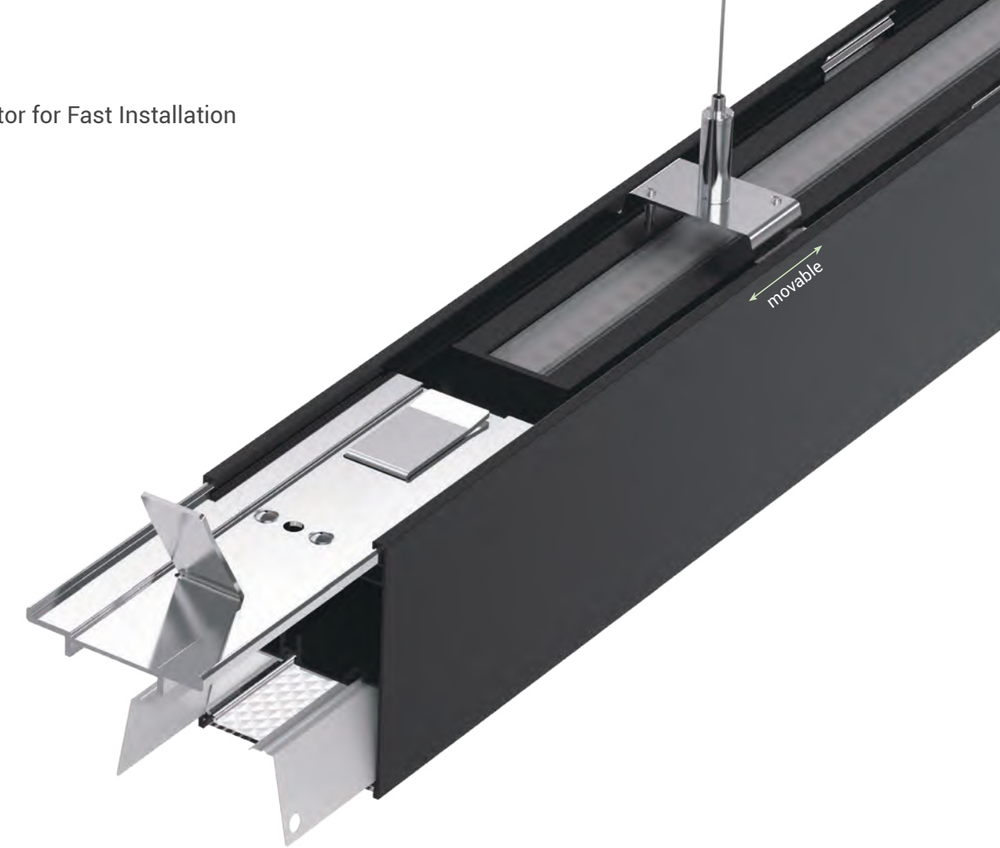


Product Features:




Seamless joints with no light leakage



Customizable shape modules

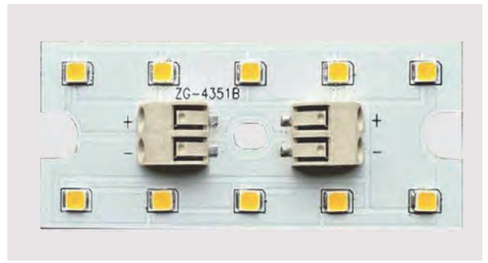


Custom lengths available in 70mm increments

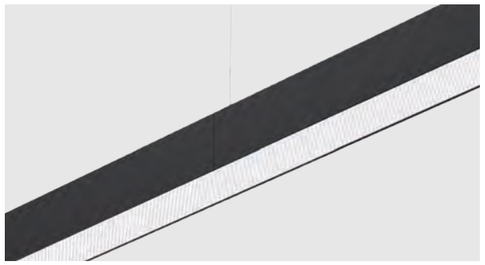

Microprismatic diffuser for visual comfort (UGR<19)

Pendant & Surface Mounted

New

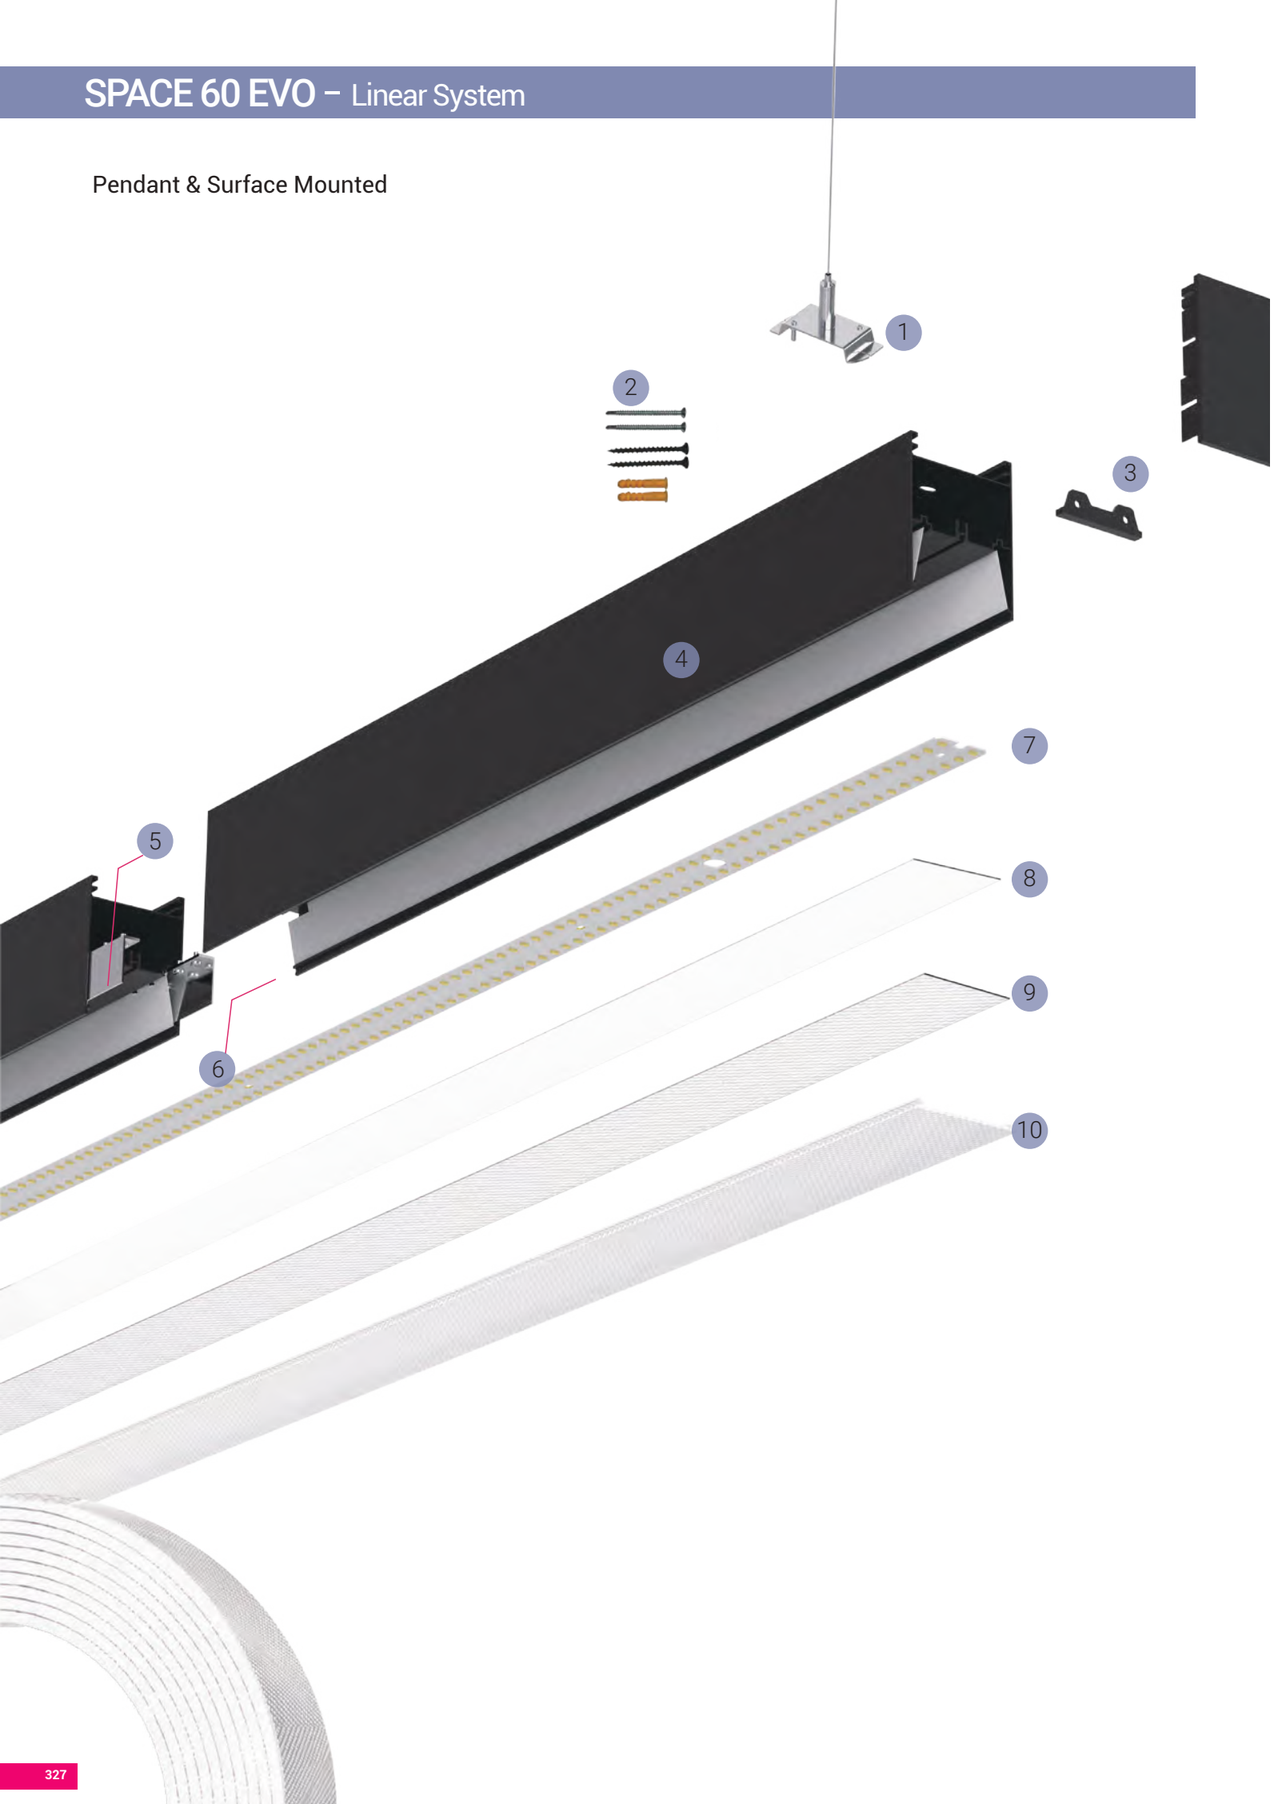


Construction

1. Pendant Insallation Steel Wire Kit
2. Surface Mounted Installation Brackets
3. End Cap Set (no light leakage, no visible screw)
4. Profile Channel
5. Linear Connector
6. Light Leakage Prevention Cover
7. LED Module
8. Opal Diffuser Film
9. Microprismatic Film
10. Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
    30 meters per run, in-field cuttable

Trim Recessed

New

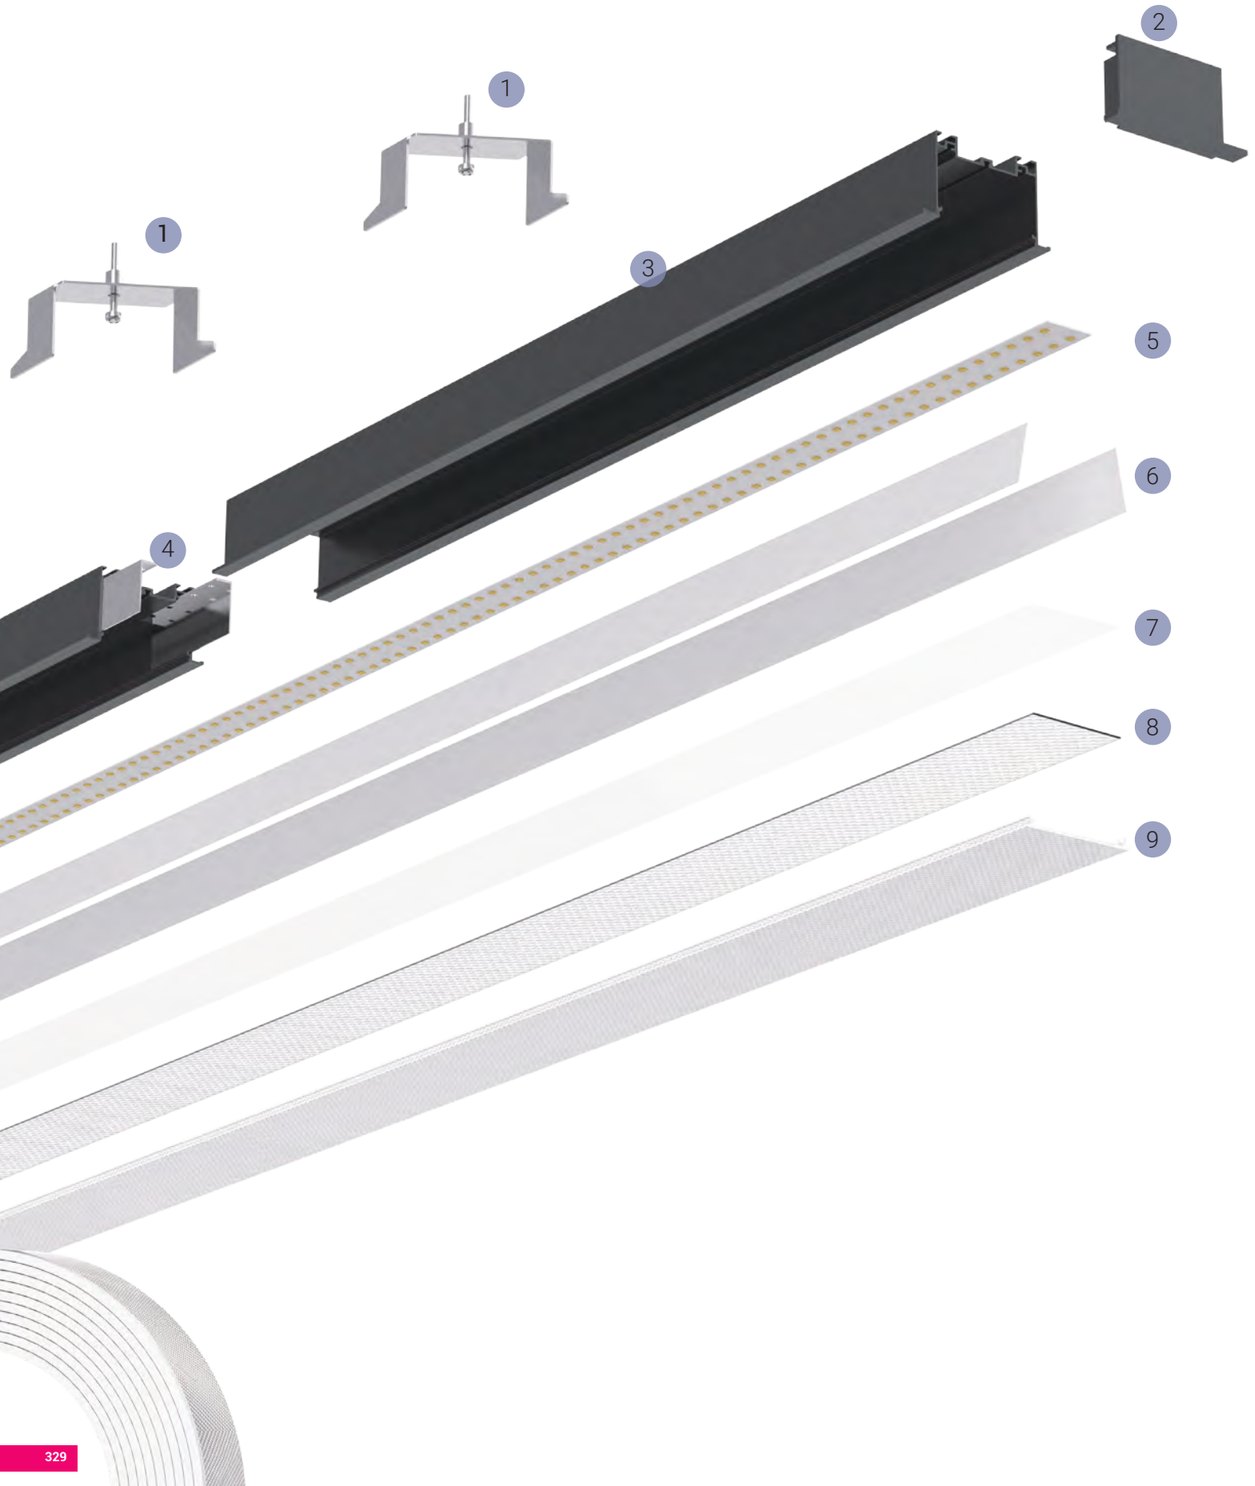

Construction

1. Trim Recessed Mounting Kit
2. End Cap with Trim
3. Profile Channel with Trim
4. Linear Connector
5. LED Module
6. Light Reflection Film
7. Opal Diffuser Film
8. Microprismatic Film
9. Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
   30 meters per run, in-field cuttable

New






Project: Application reference

SPACE 60 EVO – Pendant Direct & Indirect Linear System

New



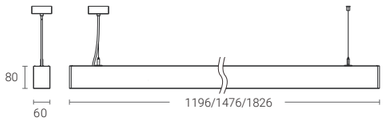

Module Lengths:

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

3mm 3mm

L1=630mm

L1=700mm

L1=770mm

L1=840mm

L1=1260mm

L1=1750mm

L1=2800mm

L=L1+2X3mm

Customized Output:

Direct Lighting: 22W/m @840, 110 lm/W

Direct & Indirect Lighting: 33W/m @840, 120 lm/W


105° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 16W, 39W, 47W, 58W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 7000lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output		Code
14W	16W	28V	500mA	560mm	White	80	4000K	80° ↓ 105° ↑	1100lm ↓	850lm ↑	SV60CL056M-8408016F-WN-U
34W	39W	28V	1200mA	1196mm	White	80	4000K	80° ↓ 105° ↑	3000lm ↓	1700lm ↑	SV60CL119P-8408039F-WN-U
42W	47W	28V	1550mA	1476mm	White	80	4000K	80° ↓ 105° ↑	3650lm ↓	2000lm ↑	SV60CL147P-8408047F-WN-U
52W	58W	28V	1850mA	1826mm	White	80	4000K	80° ↓ 105° ↑	4400lm ↓	2600lm ↑	SV60CL182P-8408058F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M Pendant 560mm	**830** CRI80/ 3000K	**80** 80° ↓	**16** 16W	**F** On-Off	**W** White	**N** None	**U** Uplight
SV60CL119P Pendant 1196mm	**840** CRI80/ 4000K	**80** 80° ↓ 105° ↑	**39** 39W	**A** 1-10V Dim	**B** Black		
SV60CL147P Pendant 1476mm	**930** CRI90/ 3000K		**47** 47W	**D** DALI Dim			
SV60CL182P Pendant 1826mm	**940** CRI90/ 4000K		**58** 58W				



Project: Application reference

SPACE 60 EVO – Pendant Direct Linear System

New



3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119P-8408027F-WN
29W	33W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3650lm ↓	SV60CL147P-8408033F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182P-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Module Lengths:


70mm

280mm

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

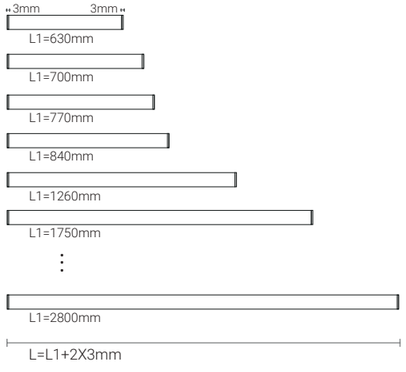

Customized Output:

Direct & Indirect Lighting: 33W/m @840, 120 lm/W

Coding

SV60	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
SV60CL056M Pendant 560mm		830 CRI80/ 3000K	80 80° ↓	13 13W	F On-Off		W White	N None		
SV60CL119P Pendant 1196mm		840 CRI80/ 4000K		27 27W	A 1-10V Dim		B Black			
SV60CL147P Pendant 1476mm		930 CRI90/ 3000K		33 33W	D DALI Dim					
SV60CL182P Pendant 1826mm		940 CRI90/ 4000K		40 40W						

SPACE 60 EVO – Surface Mounted Linear System

New



80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Surface Mounted
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119C-8408027F-WN
29W	33W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3650lm ↓	SV60CL147C-8408033F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182C-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Module Lengths:


70mm

280mm

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

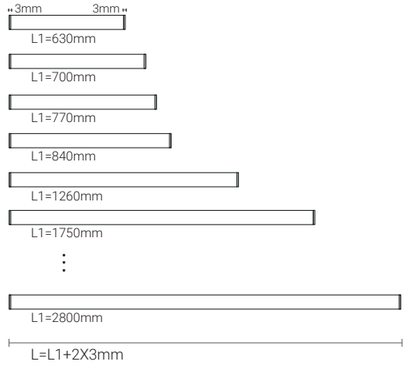


Customized Output:

Direct & Indirect Lighting: 33W/m @840, 120 lm/W

Coding

SV60	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
SV60CL056M 560mm Module		830 CRI80/ 3000K	80 80° ↓	13 13W	F On-Off		W White	N None		
SV60CL119P Surface Mounted 1196mm		840 CRI80/ 4000K		27 27W	A 1-10V Dim		B Black			
SV60CL147P Surface Mounted 1476mm		930 CRI90/ 3000K		33 33W	D DALI Dim					
SV60CL182P Surface Mounted 1826mm		940 CRI90/ 4000K		40 40W						


SPACE 60 EVO – Trim Recessed Linear System

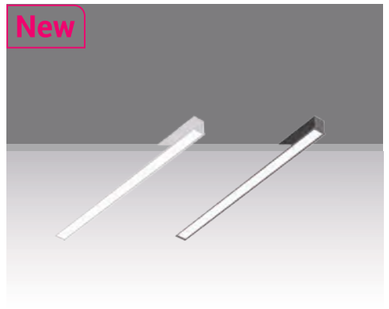

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting,Trim Recessed
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80°↓	1450lm↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1210mm	White	80	4000K	80°↓	3000lm↓	SV60CL119F-8408027F-WN
29W	33W	28V	1050mA	1490mm	White	80	4000K	80°↓	3650lm↓	SV60CL147F-8408033F-WN
36W	40W	28V	1300mA	1840mm	White	80	4000K	80°↓	4400lm↓	SV60CL182F-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M 560mm Module Trim Recessed	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**W** White	**N** None	
SV60CL119P Trim Recessed 1210mm	**840** CRI80/ 4000K		**27** 27W	**A** 1-10V Dim	**B** Black		
SV60CL147P Trim Recessed 1490mm	**930** CRI90/ 3000K		**33** 33W	**D** DALI Dim			
SV60CL182P Trim Recessed 1840mm	**940** CRI90/ 4000K		**40** 40W				


Module Lengths for Trim Recessed:

70mm

280mm

560mm

Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2x10mm

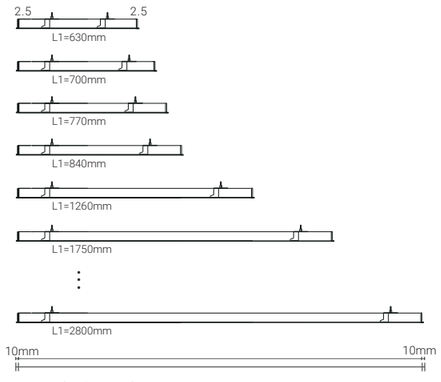


L=L1(profile length)+ 2x10mm

Cut-out length=L-10mm
Cut-out width=60mm+5mm =65mm

Customized Output:
Direct Lighting: 22W/m @840, 110 lm/W

SPACE 60 EVO – Corner Modules for Trim Recessed Linear System

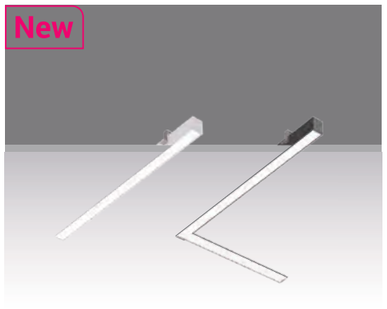

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- Lumileds LED: 12W
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim




Light Distribution

3000K







Corner Modules:



SV60LC1F
L Corner (90°)



SV60TC1F
T Corner



SV60XC1F
+ Corner

Order Info


LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLLC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLTC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLXC1F-8408012F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLLC1F SV60LC1F L Corner	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SV60CLTC1F SV60TC1F T Corner	**840** CRI80/ 4000K			**A** 1-10V Dim	**B** Black		
SV60CLXC1F SV60XC1F + Corner	**930** CRI90/ 3000K			**D** DALI Dim			
	940 CRI90/ 4000K						

	SV60-LFK	Trim Resessed Linear Connector Kit
	SV60-FRK	Trim Recessed Mounting kit
	SV60 -EFK	SPACE EVO Trim Recessed Endcap Kit White/ Black Two unit for two sides
	SV60 -FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60 -FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll



Project: Application reference


SPACE 60 EVO Curve – Pendant Direct & Indirect linear system





105° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 33W, 34W, 42W, 51W, 56W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6750lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim











Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
31W	34W	28V	1100mA	1036mm	White	80	4000K	80° ↓ 105° ↑	2550lm ↓ 1550lm ↑	SV60CLC066P-8408034F-WN-U-CM
46W	51W	28V	1650mA	1507mm	White	80	4000K	80° ↓ 105° ↑	3750lm ↓ 2400lm ↑	SV60CLC096P-8408051F-WN-U-CM
31W	34W	28V	1100mA	989mm	White	80	4000K	80° ↓ 105° ↑	2550lm ↓ 1550lm ↑	SV60CLC126P-8408034F-WN-U-CM
38W	42W	28V	1350mA	1225mm	White	80	4000K	80° ↓ 105° ↑	3100lm ↓ 1950lm ↑	SV60CLC156P-8408042F-WN-U-CM
46W	51W	28V	1650mA	1460mm	White	80	4000K	80° ↓ 105° ↑	3750lm ↓ 2400lm ↑	SV60CLC186P-8408051F-WN-U-CM
50W	56W	28V	1800mA	1617mm	White	80	4000K	80° ↓ 105° ↑	3750lm ↓ 3000lm ↑	SV60CLC206P-8408056F-WN-U-CM
29W	33W	28V	1050mA	966mm	White	80	4000K	80° ↓ 105° ↑	2450lm ↓ 1550lm ↑	SV60CLC246P-8408033F-WN-U-CM
38W	42W	28V	1350mA	1201mm	White	80	4000K	80° ↓ 105° ↑	3100lm ↓ 1950lm ↑	SV60CLC306P-8408042F-WN-U-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLC066P Pendant D600mm	**830** CRI80/ 3000K	**80** 80° ↓ 105° ↑	**33** 33W	**F** On-Off	**W** White	**N** None	**U-CM** Uplight, Extrusion Cover, Middle Section
SV60CLC096P Pendant D900mm	**840** CRI80/ 4000K		**34** 34W	**A** 1-10V Dim	**B** Black		
SV60CLC126P Pendant D1200mm	**930** CRI90/ 3000K		**42** 42W	**D** DALI Dim			
SV60CLC156P Pendant D1500mm	**940** CRI90/ 4000K		**51** 51W				
SV60CLC186P Pendant D1800mm			**56** 56W				
SV60CLC206P Pendant D2000mm							
SV60CLC246P Pendant D2400mm							
SV60CLC306P Pendant D3000mm							


SPACE 60 EVO Curve – Pendant Direct linear system





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Light Pendant Direct
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim











Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	80°	2550lm	SV60CLC066P-8408023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	80°	3750lm	SV60CLC096P-8408034F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	80°	2550lm	SV60CLC126P-8408023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	80°	3100lm	SV60CLC156P-8408028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	80°	3750lm	SV60CLC186P-8408034F-WN-CM
34W	37W	28V	1200mA	1617mm	White	80	4000K	80°	4100lm	SV60CLC206P-8408037F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80°	2450lm	SV60CLC246P-8408022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	80°	3100lm	SV60CLC306P-8408028F-WN-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLC066P Pendant D600mm	**830** CRI80/ 3000K	**80** 80° ↓	**22** 22W	**F** On-Off	**W** White	**N** None	
SV60CLC096P Pendant D900mm	**840** CRI80/ 4000K		**23** 23W	**A** 1-10V Dim	**B** Black		
SV60CLC126P Pendant D1200mm	**930** CRI90/ 3000K		**28** 28W	**D** DALI Dim			
SV60CLC156P Pendant D1500mm	**940** CRI90/ 4000K		**34** 34W				
SV60CLC186P Pendant D1800mm			**37** 37W				
SV60CLC206P Pendant D2000mm							
SV60CLC246P Pendant D2400mm							
SV60CLC306P Pendant D3000mm							

SPACE 60 EVO Curve – Surface Mounted Linear System


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- General Light, Surface Mounted
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim









Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	80°	2550lm	SV60CLC066C-8408023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	80°	3750lm	SV60CLC096C-8408034F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	80°	2550lm	SV60CLC126C-8408023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	80°	3100lm	SV60CLC156C-8408028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	80°	3750lm	SV60CLC186C-8408034F-WN-CM
34W	37W	28V	1200mA	1617mm	White	80	4000K	80°	4100lm	SV60CLC206C-8408037F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80°	2450lm	SV60CLC246C-8408022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	80°	3100lm	SV60CLC306C-8408028F-WN-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLC066C Surface D600mm	**830** CRI80/ 3000K	**80** 80° ↓	**22** 22W	**F** On-Off	**W** White	**N** None	
SV60CLC096C Surface D900mm	**840** CRI80/ 4000K		**23** 23W	**A** 1-10V Dim	**B** Black		
SV60CLC126C Surface D1200mm	**930** CRI90/ 3000K		**28** 28W	**D** DALI Dim			
SV60CLC156C Surface D1500mm	**940** CRI90/ 4000K		**34** 34W				
SV60CLC186C Surface D1800mm			**37** 37W				
SV60CLC206C Surface D2000mm							
SV60CLC246C Surface D2400mm							
SV60CLC306C Surface D3000mm							

SPACE 60 EVO Curve – Trim Recessed Linear System


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- General Lighting,Trim Recessed
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim









Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	80°	2550lm	SV60CLC066F-8408023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	80°	3750lm	SV60CLC096F-8408034F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	80°	2550lm	SV60CLC126F-8408023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	80°	3100lm	SV60CLC156F-8408028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	80°	3750lm	SV60CLC186F-8408034F-WN-CM
34W	37W	28V	1200mA	1617mm	White	80	4000K	80°	4100lm	SV60CLC206F-8408037F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80°	2450lm	SV60CLC246F-8408022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	80°	3100lm	SV60CLC306F-8408028F-WN-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLC066F Trim Recessed D600mm	**830** CRI80/ 3000K	**80** 80° ↓	**22** 22W	**F** On-Off	**W** White	**N** None	
SV60CLC096F Trim Recessed D900mm	**840** CRI80/ 4000K		**23** 23W	**A** 1-10V Dim	**B** Black		
SV60CLC126F Trim Recessed D1200mm	**930** CRI90/ 3000K		**28** 28W	**D** DALI Dim			
SV60CLC156F Trim Recessed D1500mm	**940** CRI90/ 4000K		**34** 34W				
SV60CLC186F Trim Recessed D1800mm			**37** 37W				
SV60CLC206F Trim Recessed D2000mm							
SV60CLC246F Trim Recessed D2400mm							
SV60CLC306F Trim Recessed D3000mm							

SPACE 60 EVO – Corner Modules for Pendant & Surface Mounted Linear System

New

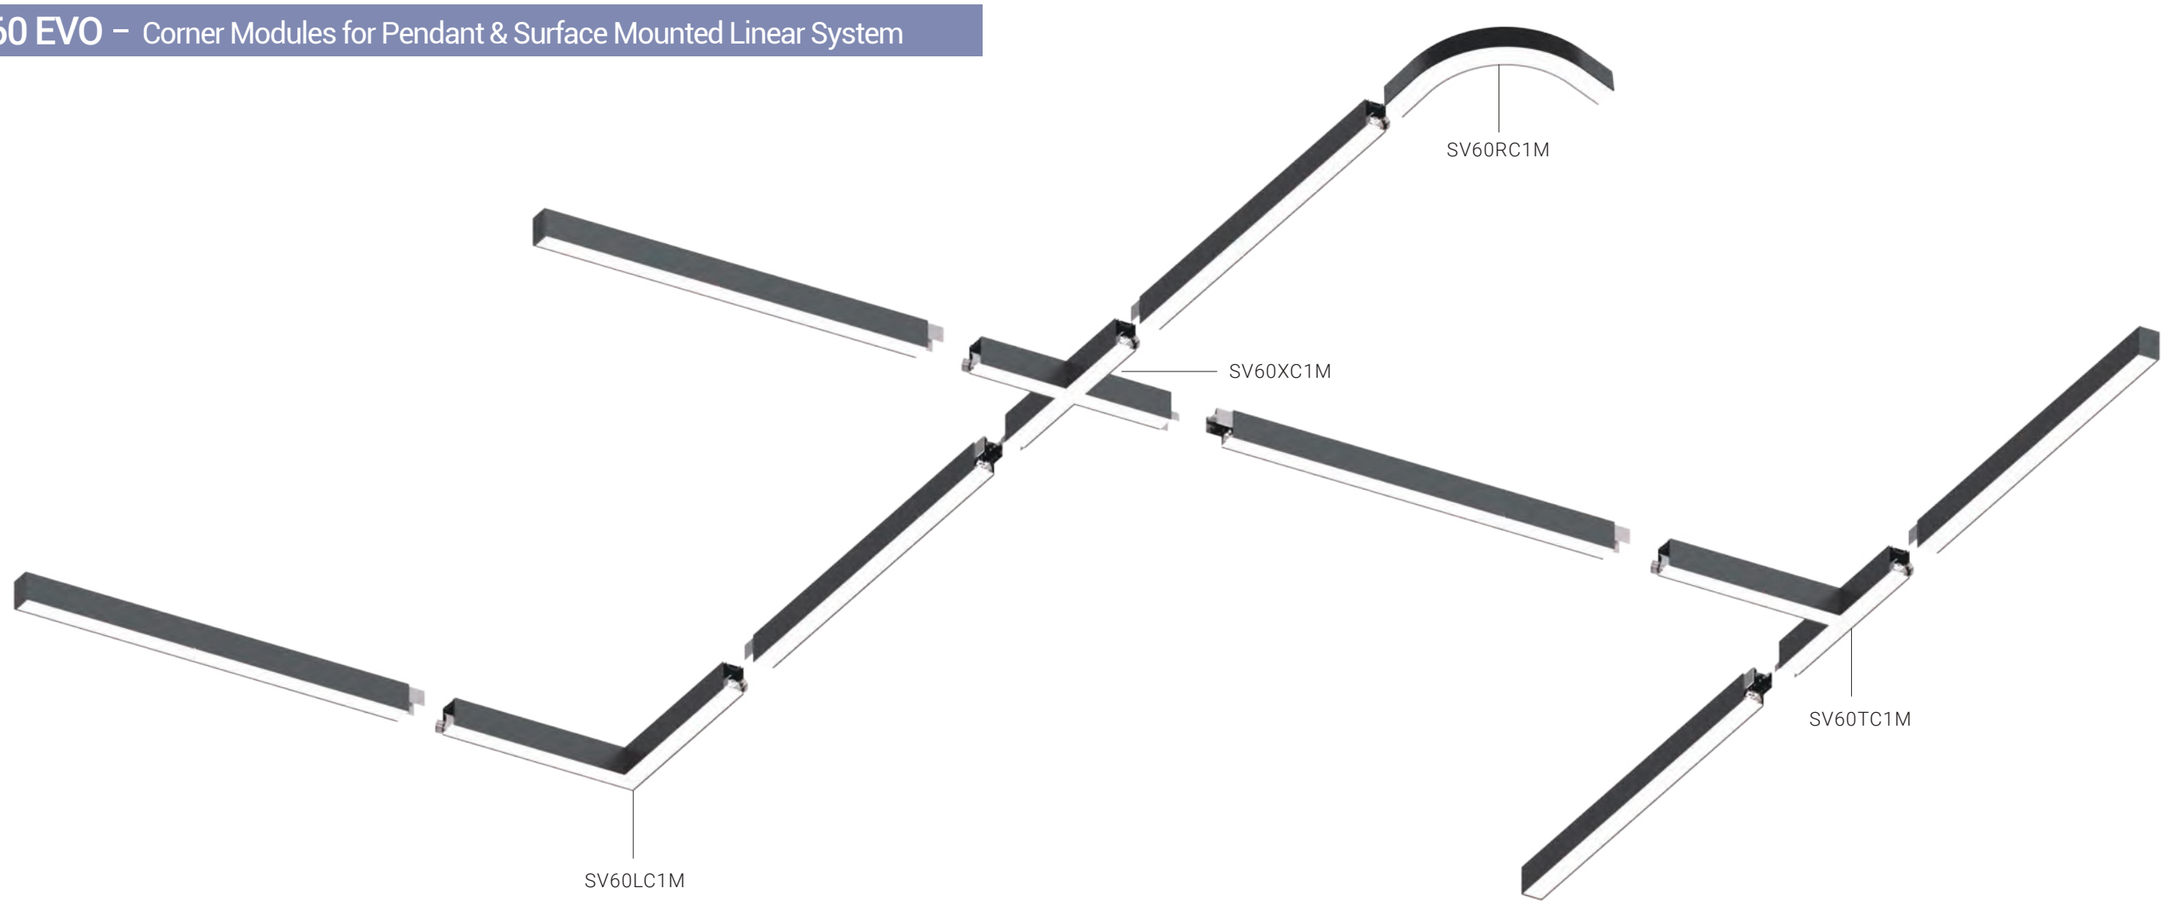

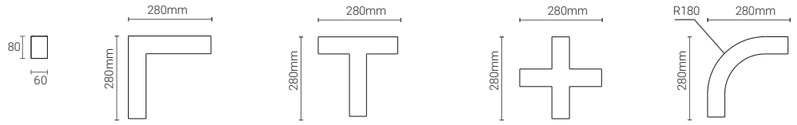

SV60LC1M
L Corner

SV60TC1M
T Corner

SV60XC1M
+Corner

SV60RC1M
Arc-corner

	SV60-PK	Pendant Installation Kit (with Ceiling Box)
	SV60-PWK	Pendant Steel Wire Kit (no Ceiling Box)
	SV60-SMK	Surface Mounted Kit
	SV60 -LCK	Linear Connector Kit
	SV60-ECK	SPACE 60 EVO Surface Mounted&Pendant Endcap Kit White/ Black Two unit for two sides
	SV60-FCK	2.5-meter three-core input wire&Quick-connect for ON/OFF
	SV60-DCK	2.5-meter five-core input wire&Quick-connect for Dimming control
	SV60 -FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60 -FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLLC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLTC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLXC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLRC1M-8408012F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLLC1M SV60LC1M L Corner 280*280mm	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SV60CLTC1M SV60TC1M T Corner 280*280mm	**840** CRI80/ 4000K			**A** 1-10V Dim	**B** Black		
SV60CLXC1M SV60XC1M + Corner 280*280mm	**930** CRI90/ 3000K			**D** DALI Dim			
SV60CLRC1M SV60RC1M Arc-corner 280*280mm	**940** CRI90/ 4000K						

New

Modules & Installation Kits for Pendant & Surface-Mounted Linear System

Non-standard Lengths



SV60
Line
560~2800mm



SV60
Line Uplight
560~2800mm



SV60-C
Line
560~2800mm



SV60-C
Line Uplight
560~2800mm

L / T / X /Arc Corners



SV60LC1M
L Corner
280*280mm



SV60TC1M
T Corner
280*280mm



SV60XC1M
+ Corner
280*280mm




SV60RC1M
SV60RC2M
Arc-corner
inner radius120/240

Installation Kits



SV60-ECK
End Caps
W60 H80mm



SV60-LCK
Connector



SV60-HCK
Quick Connector
for Suspension



SV60-PK2
SV60-PWK(no Ceiling Box)
Suspension Mounting
2m

Installation Kits




SV60-SMK
Surface Mounting




SV60-FCK(ON/OF)
SV60-DCK(DALI)
2.5mm




SV60-FOPC
Opal Cover
Roll 30m



SV60-FMPC
Microprismatic Cover
Roll 30m

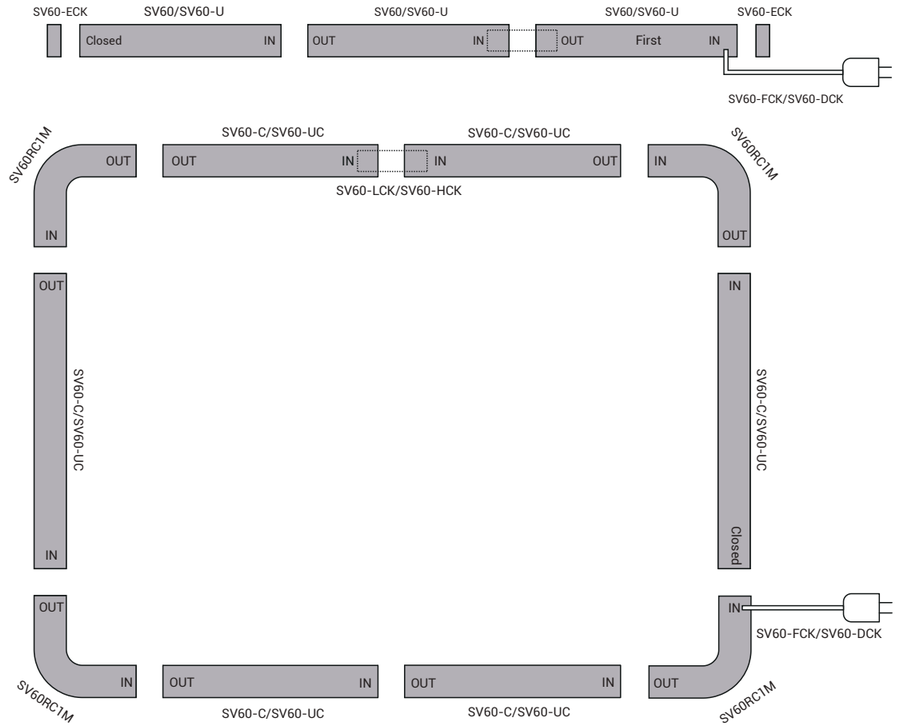

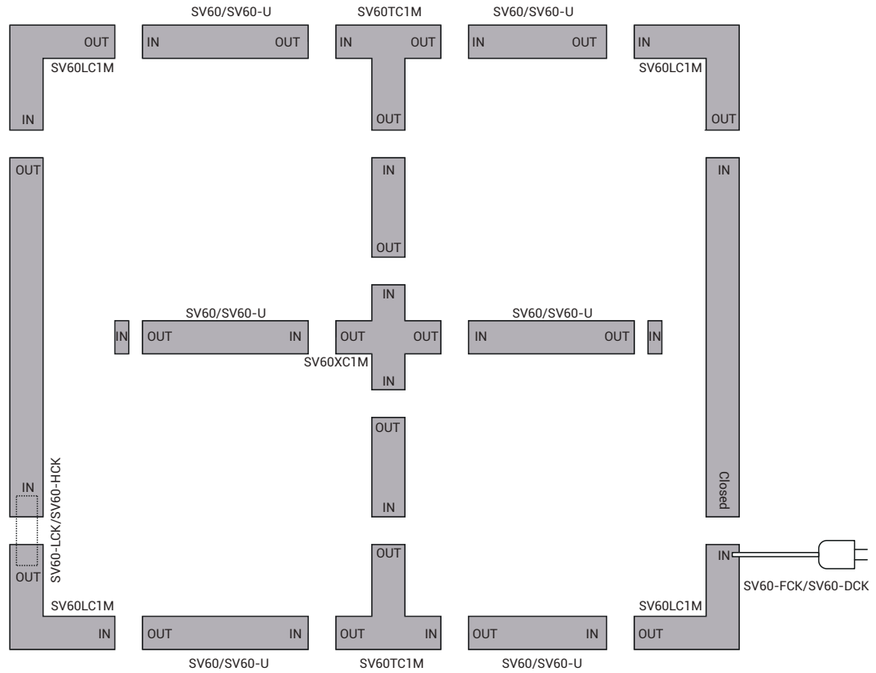

New

Modules & Installation Kits for Trim Recessed Linear System

Non-standard Lengths



SV60-F
Line
560~2800mm



SV60-F-C
Line
560~2800mm



SV60-LFK

L / T / X /Arc Corners



SV60LC1F
L Corner (90°)
280*280mm



SV60TC1F
T Corner
280*280mm



SV60XC1F
+ Corner
280*280mm

Installation Kits




SV60-FRK
Trim Recessed




SV60-EFK
End Caps
45*45mm




SV60-FOPC
Opal Cover
Roll 30m



SV60-FMPC
Microprismatic Cover
Roll 30m



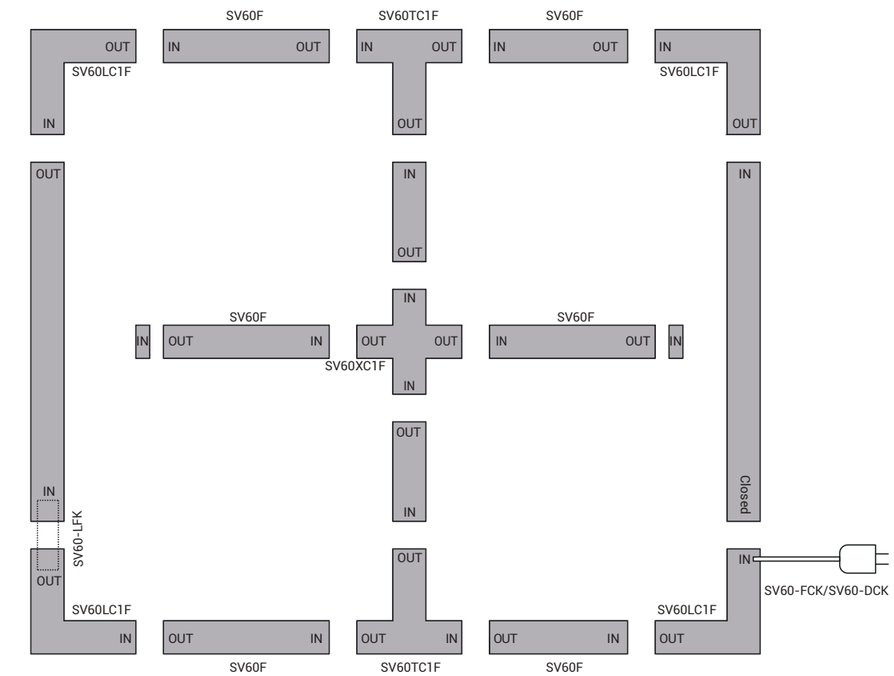

SPACE 60 EVO Ring

Premium Minimalist Circular Luminaire
Available in 8 Diameters and 3 Mounting Options
for Versatile Architectural Applications
Up to 130 lm/W High-Efficiency Performance
UGR<19 for Direct and Indirect Light Version




Project: Application reference


SPACE 60 EVO Ring – Linear System

New


The **SPACE 60 EVO Ring** is a comprehensive series of circular luminaires available in a full range of sizes, with diameters from Ø660mm to Ø3060mm (refer to the size chart for details).
It offers three mounting options—pendant, surface-mounted, and trim recessed—for versatile use across various architectural applications.
The pendant version is also available with an optional uplight function, providing softer, more uniform ambient illumination and enhanced visual comfort.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

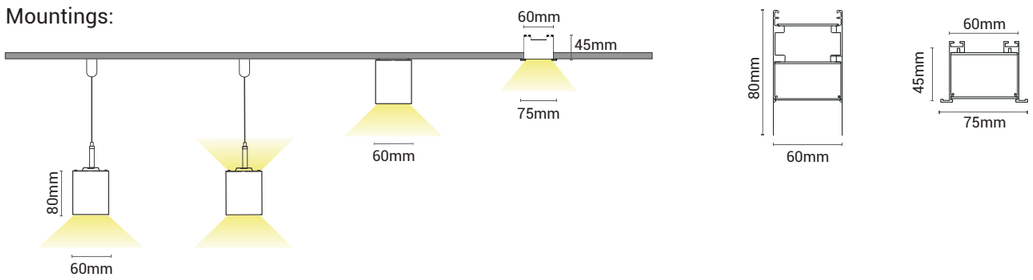

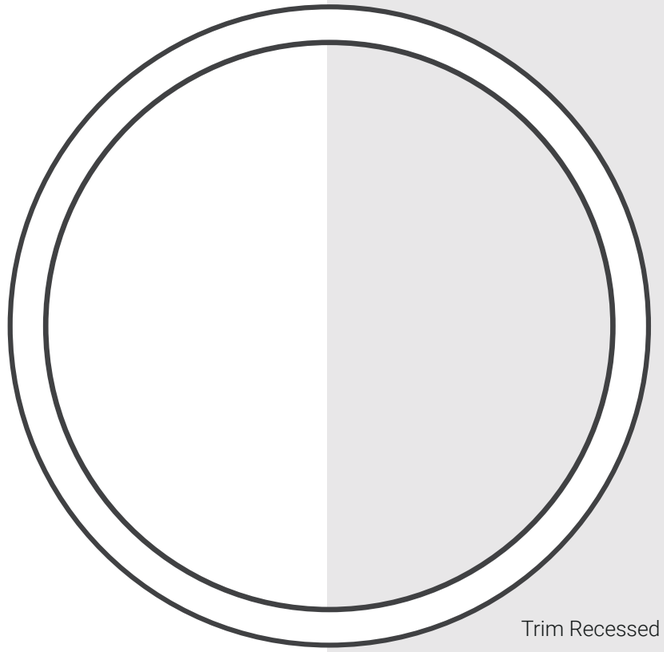


Trim Recessed

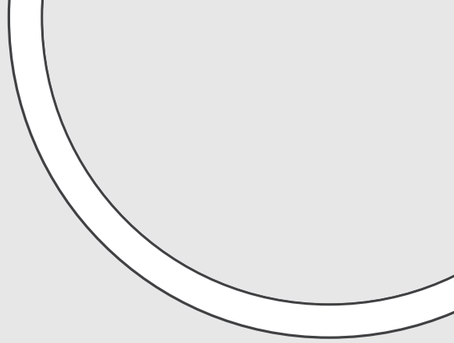


Surface-Mounted

Pendant and Surface-Mounted

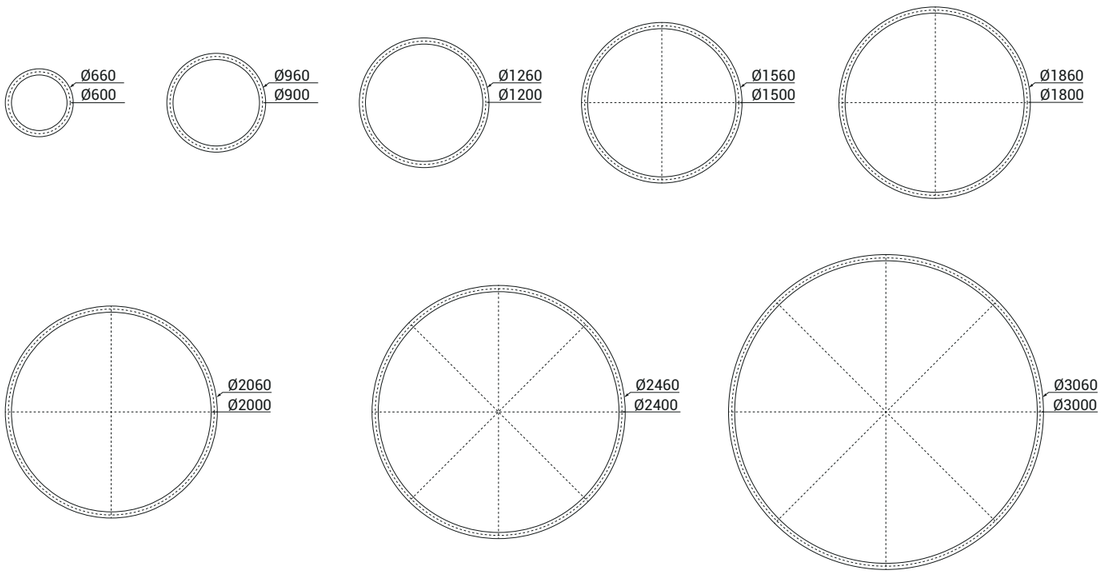

Trim Recessed

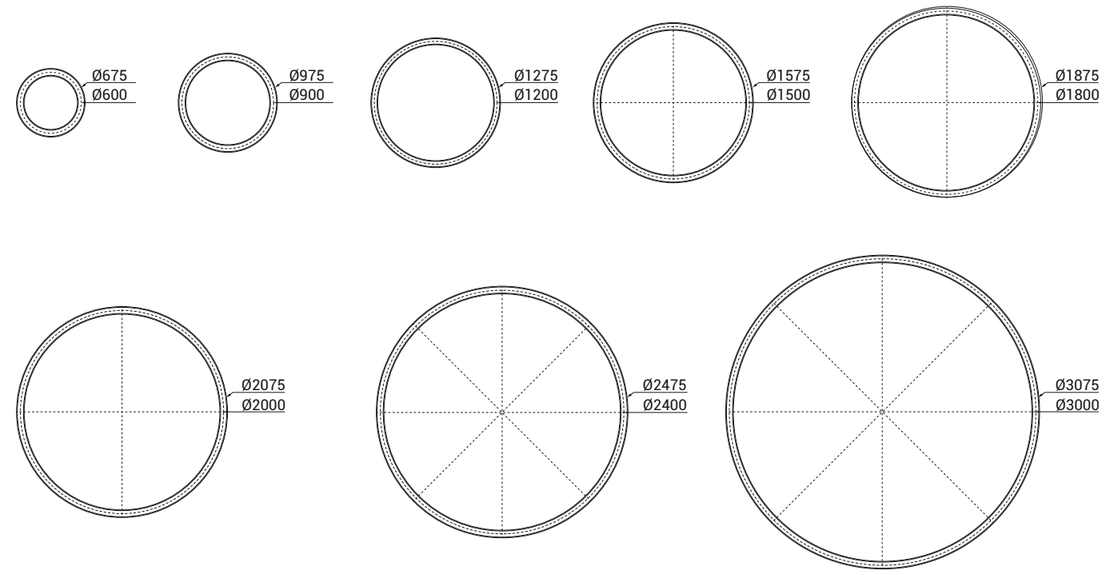

New





Project: Application reference

SPACE 60 EVO Ring – Pendant Direct Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

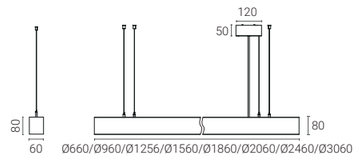

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95°↓	3542lm	SV60CLD066P-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95°↓	5030lm	SV60CLD096P-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95°↓	7423lm	SV60CLD126P-84095055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	95°↓	9315lm	SV60CLD156P-84095070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	95°↓	11103lm	SV60CLD186P-84095084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	95°↓	12384lm	SV60CLD206P-84095093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	95°↓	14876lm	SV60CLD246P-84095112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	95°↓	18564lm	SV60CLD306P-84095140F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SV60CLD096P Pendant D960mm	**840** CRI>80/ 4000K		**038** 38W	**A** 1-10V Dim	**B** Black		
SV60CLD126P Pendant D1260mm			**055** 55W	**D** DALI Dim			
SV60CLD156P Pendant D1560mm			**070** 70W				
SV60CLD186P Pendant D1860mm			**084** 84W				
SV60CLD206P Pendant D2060mm			**093** 93W				
SV60CLD246P Pendant D2460mm			**112** 112W				
SV60CLD306P Pendant D3060mm			**140** 140W				

SPACE 60 EVO Ring – Pendant Direct & Indirect Linear System


New



110° 95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 38W, 52W, 77W, 96W, 115W, 128W, 154W, 193W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 110° ↑
- Lumen Output: Up to 27300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

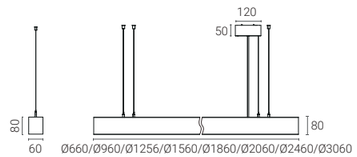

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
38W	42W	33V	1100mA	D660mm	White	80	4000K	95°↓ 110°↑	5880lm	SV60CLD066P-84095042F-WN-U
52W	57W	33V	1700mA	D960mm	White	80	4000K	95°↓ 110°↑	7980lm	SV60CLD096P-84095057F-WN-U
77W	84W	33V	2250mA	D126mm	White	80	4000K	95°↓ 110°↑	11760lm	SV60CLD126P-84095084F-WN-U
96W	105W	33V	2800mA	D1560mm	White	80	4000K	95°↓ 110°↑	14700lm	SV60CLD156P-84095105F-WN-U
115W	126W	33V	3400mA	D1860mm	White	80	4000K	95°↓ 110°↑	17640lm	SV60CLD186P-84095126F-WN-U
128W	140W	33V	3750mA	D2060mm	White	80	4000K	95°↓ 110°↑	19600lm	SV60CLD206P-84095140F-WN-U
154W	168W	33V	4500mA	D2460mm	White	80	4000K	95°↓ 110°↑	23520lm	SV60CLD246P-84095168F-WN-U
193W	210W	33V	5600mA	D3060mm	White	80	4000K	95°↓ 110°↑	29400lm	SV60CLD306P-84095210F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**042** 42W	**F** On-Off	**W** White	**N** None	**U** Uplight
SV60CLD096P Pendant D660mm	**840** CRI>80/ 4000K	**95** 95° ↓ 110°↑	**057** 57W	**A** 1-10V Dim	**B** Black		
SV60CLD126P Pendant D1260mm			**084** 84W	**D** DALI Dim			
SV60CLD156P Pendant D1560mm			**105** 105W				
SV60CLD186P Pendant D1860mm			**126** 126W				
SV60CLD206P Pendant D2060mm			**140** 140W				
SV60CLD246P Pendant D2460mm			**168** 168W				
SV60CLD306P Pendant D3060mm			**210** 210W				

SPACE 60 EVO Ring – Surface Mounted Linear System

New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95° ↓	3542lm	SV60CLD066C-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD096C-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD126C-84095055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD156C-84095070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	95° ↓	11103lm	SV60CLD186C-84095084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	95° ↓	12384lm	SV60CLD206C-84095093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	95° ↓	14876lm	SV60CLD246C-84095112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	95° ↓	18564lm	SV60CLD306C-84095140F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066C Ceiling D660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SV60CLD096C Ceiling D960mm	**840** CRI>80/ 4000K		**038** 38W	**A** 1-10V Dim	**B** Black		
SV60CLD126C CeilingD1260mm			**055** 55W	**D** DALI Dim			
SV60CLD156C Ceiling D1560mm			**070** 70W				
SV60CLD186C CeilingD1860mm			**084** 84W				
SV60CLD206C Ceiling D2060mm			**093** 93W				
SV60CLD246C Ceiling D2460mm			**112** 112W				
SV60CLD306C Ceiling D3060mm			**140** 140W				

SPACE 60 EVO Ring – Trim Recessed Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D675mm	White	80	4000K	95° ↓	3542lm	SV60CLD067F-84095028F-WN
35W	38W	33V	1050mA	D975mm	White	80	4000K	95° ↓	5030lm	SV60CLD097F-84095038F-WN
52W	55W	33V	1500mA	D1275mm	White	80	4000K	95° ↓	7423lm	SV60CLD127F-84095055F-WN
65W	70W	33V	1900mA	D1575mm	White	80	4000K	95° ↓	9315lm	SV60CLD157F-84095070F-WN
77W	84W	33V	2250mA	D1875mm	White	80	4000K	95° ↓	11103lm	SV60CLD187F-84095084F-WN
86W	93W	33V	2500mA	D2075mm	White	80	4000K	95° ↓	12384lm	SV60CLD207F-84095093F-WN
103W	112W	33V	3000mA	D2475mm	White	80	4000K	95° ↓	14876lm	SV60CLD247F-84095112F-WN
129W	140W	33V	3750mA	D3075mm	White	80	4000K	95° ↓	18564lm	SV60CLD307F-84095140F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD067F Trim recessed D675mm	**830** CRI>80/ 3000K	**95** 95° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SV60CLD097F Trim recessed D975mm	**840** CRI>80/ 4000K		**038** 38W	**A** 1-10V Dim	**B** Black		
SV60CLD127F Trim recessed D1275mm			**055** 55W	**D** DALI Dim			
SV60CLD157F Trim recessed D1575mm			**070** 70W				
SV60CLD187F Trim recessed D1875mm			**084** 84W				
SV60CLD207F Trim recessed D1975mm			**093** 93W				
SV60CLD247F Trim recessed D2475mm			**112** 112W				
SV60CLD307F Trim recessed D3075mm			**140** 140W				

SPACE 60 EVO Hexagon

Premium Minimalist Hexagonal Luminaire
Available in 2 Side Lengths, 3 Mounting Options
Up to 130 lm/W High-Efficiency Performance
UGR<19 for Direct and Indirect Light Version



Project: Application reference

SPACE 60 EVO Hexagon – Linear System


New


The **SPACE 60 EVO Hexagon** is a versatile series of geometric luminaires available in two side lengths—600mm and 800mm. It supports pendant, surface-mounted, and trim-recessed installations, offering flexible configuration for diverse design concepts.


The pendant version is optionally available with direct and indirect lighting, providing soft, balanced illumination and enhanced visual comfort. With its refined form and adaptable mounting options, SPACE 60 EVO Hexagon brings creative flexibility to architectural lighting design.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options


Mountings:

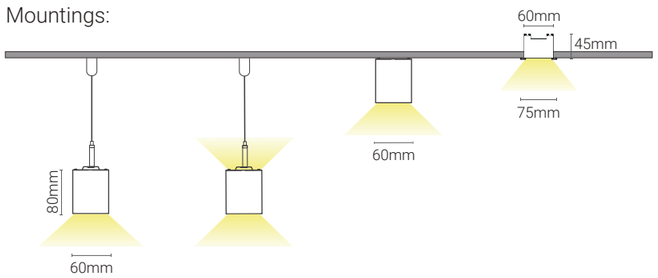








Pendant and Surface-Mounted






Trim Recessed





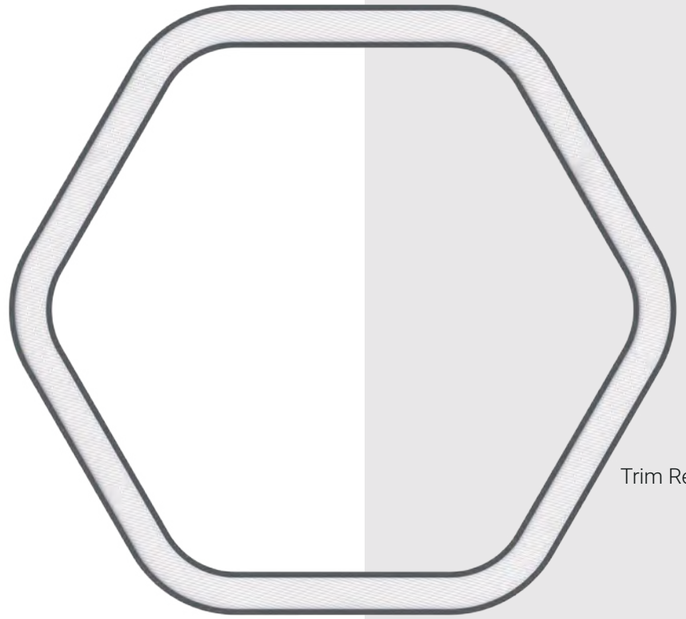

Trim Recessed



Surface-Mounted

Custom Geometric Formations



SPACE 60 EVO Hexagon – Pendant Direct Linear System

New



95°

3000K
4000K

CRI >80

CRI >90

IP20


CE


UKCA


5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim









Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	95°↓	7150lm	SV60CLH060P-84095055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	95°↓	9100lm	SV60CLH080P-84095070F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLH* – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060P Pendant 600mm	**830** CRI>80/ 3000K	**95** 95° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SV60CLH080P Pendant 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 1-10V Dim	**B** Black		
				D DALI Dim			



Project: Application reference

SPACE 60 EVO Hexagon – Pendant Direct & Indirect Linear System


New





105° / 95° | 3000K / 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 50W ↓ 24W ↑, 63W ↓ 37W ↑; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 105° ↑
- Lumen Output: Up to 9100lm ↓ 6100lm ↑ System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim








Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W ↓ 24W ↑	55W ↓ 27W ↑	33V	2250mA	600mm	White	80	4000K	95° ↓ 105° ↑	7150lm ↓ 4200lm ↑	SV60CLH060P-840950820F-WN-U
63W ↓ 37W ↑	70W ↓ 40W ↑	33V	2850mA	800mm	White	80	4000K	95° ↓ 105° ↑	9100lm ↓ 6100lm ↑	SV60CLH080P-840951100F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060P Pendant 600mm	830 CRI>80/ 3000K	95 95° ↓ 105°↑	082 82W	F On-Off	W White	N None	U Uplight
SV60CLH080P Pendant 800mm	840 CRI>80/ 4000K	95 95° ↓ 105°↑	110 110W	A 1-10V Dim	B Black		
				D DALI Dim			



Project: Application reference

SPACE 60 EVO Hexagon – Surface Mounted Linear System

New



95°

3000K
4000K

CRI >80

CRI >90

IP20

CE


UKCA


5 YEARS GUARANTEE

Quick Info

- General Lighting, Surface Mounted
- LED: 50W, 63W, CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim









Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	95°↓	7150lm	SV60CLH060C-84095055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	95°↓	9100lm	SV60CLH080C-84095070F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060C Ceiling 600mm	**830** CRI>80/ 3000K	**95** 95° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SV60CLH080C Ceiling 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 1-10V Dim	**B** Black		
				D DALI Dim			



Project: Application reference

SPACE 60 EVO Hexagon – Trim Recessed Linear System


New





95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Trim Recessed
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim









Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	95° ↓	7150lm	SV60CLH060F-84095055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	95° ↓	9100lm	SV60CLH080F-84095070F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060F Trim Recessed 600mm	830 CRI>80/ 3000K	95 95° ↓	055 55W	F On-Off	W White	N None	
SV60CLH080F Trim Recessed 800mm	840 CRI>80/ 4000K		070 70W	A 1-10V Dim	B Black		
				D DALI Dim			



Project: Application reference

SPACE 60 EVO Oval

Minimalist Racetrack Oval Luminaire
Available in 2 Sizes, 3 Mounting Options
Up to 130 lm/W High-Efficiency Performance
UGR<19 for Direct and Indirect Light Version



Project: Application reference


SPACE 60 EVO Oval – Linear System


New


The **SPACE 60 EVO Oval** is a versatile linear luminaire with a racetrack oval profile.
Available in three sizes and mounting options, including pendant, surface-mounted, and recessed, it suits diverse applications. The pendant model is available in direct and indirect light distribution, creating balanced and comfortable illumination. With efficiency up to 130 lm/W and UGR < 19, the system ensures both high performance and visual comfort, with opal or microprismatic diffuser options.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options


Mountings:

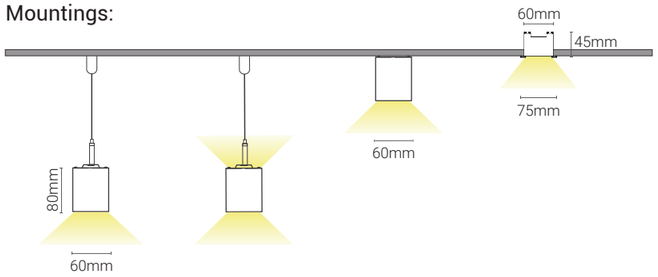







Pendant and Surface-Mounted

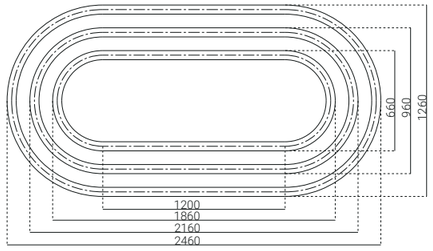


Trim Recessed

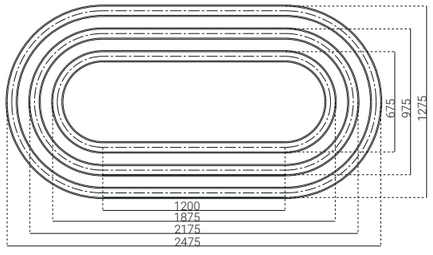

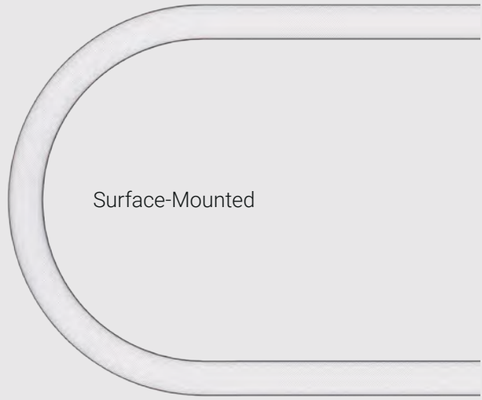

Surface-Mounted

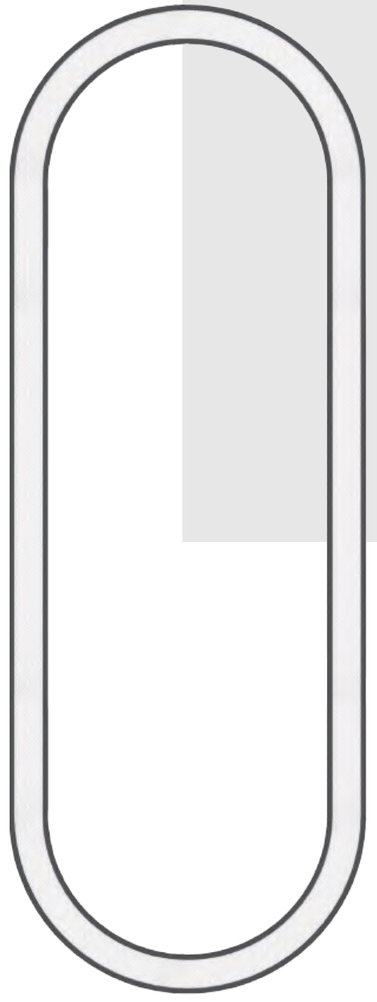

Trim Recessed

New



Project: Application reference

SPACE 60 EVO Oval – Pendant Direct Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- LED: 56W, 66W, 83W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 11700lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

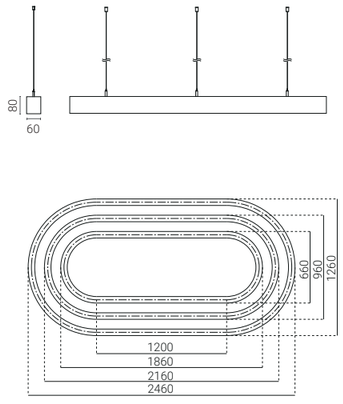

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	95°↓	7950lm	SV60CLR066P-84095061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	95°↓	9400lm	SV60CLR096P-84095072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	95°↓	11700lm	SV60CLR126P-84095090F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLR*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLR066P Pendant 660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SV60CLR096P Pendant 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 1-10V Dim	**B** Black		
SV60CLR126P Pendant 1260mm			**090** 90W	**D** DALI Dim			

SPACE 60 EVO Oval – Pendant Direct & Indirect Linear System


New



105° 95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 56W ↓ 27W ↑, 66W ↓ 33W ↑, 83W ↓ 41W ↑; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 105° ↑
- Lumen Output: Up to 11700lm ↓ 7200lm ↑ System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

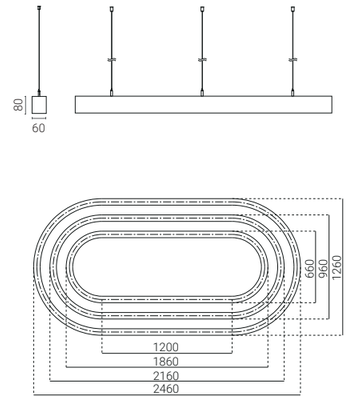

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W↓ 27W↑	60W↓ 30W↑	33V	2500mA	660mm	White	80	4000K	95°↓ 105°↑	7950lm↓ 4650m↑	SV60CLR066P-84095090F-WN-U
66W↓ 33W↑	72W↓ 36W↑	33V	3000mA	960mm	White	80	4000K	95°↓ 105°↑	9400lm↓ 5700m↑	SV60CLR096P-84095108F-WN-U
83W↓ 41W↑	90W↓ 45W↑	33V	3750mA	1260mm	White	80	4000K	95°↓ 105°↑	11700lm↓ 7200lm↑	SV60CLR126P-84095135F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLR*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLR066P Pendant 660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**090** 90W	**F** On-Off	**W** White	**N** None	**U** Uplight
SV60CLR096P Pendant 960mm	**840** CRI>80/ 4000K	**95** 95° ↓ 105°↑	**108** 108W	**A** 1-10V Dim	**B** Black		
SV60CLR080P Pendant 1260mm			**135** 135W	**D** DALI Dim			

SPACE 60 EVO Oval – Surface Mounted Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

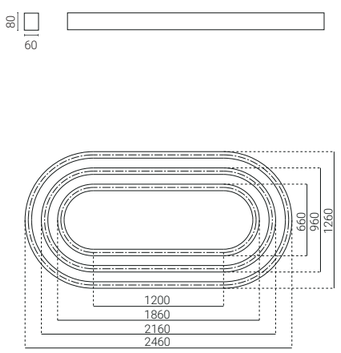

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	95°↓	7950lm	SV60CLR066C-84095061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	95°↓	9400lm	SV60CLR096C-84095072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	95°↓	11700lm	SV60CLR126C-84095090F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLR*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLR066C Ceiling 660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SV60CLR096C Ceiling 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 1-10V Dim	**B** Black		
SV60CLR126C Ceiling 1260mm			**90** 90W	**D** DALI Dim			

SPACE 60 EVO Oval – Trim Recessed Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

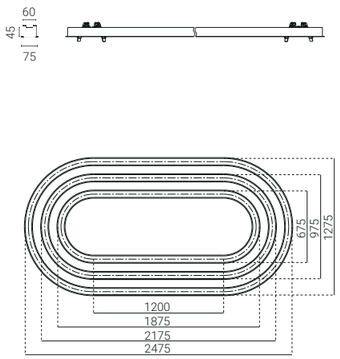

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	95°↓	7950lm	SV60CLR066F-84095061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	95°↓	9400lm	SV60CLR096F-84095072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	95°↓	11700lm	SV60CLR126F-84095090F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLR*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLR066F Trim recessed 660mm	**830** CRI>80/ 3000K	**95** 95° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SV60CLR096F Trim recessed 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 1-10V Dim	**B** Black		
SV60CLR126F Trim recessed 1260mm			**90** 90W	**D** DALI Dim			

SPACE 40 PRO

45mm profile, 60mm with trim
Microprismatic optic, visual comfort
Opal diffuser, high efficiency
Extension modules in 70mm increments



Project: Application reference

New

Linear Layout & Seamless Light Line

Straight linear modules combine seamlessly to create continuous light compositions, supporting ordered spatial layouts with visual clarity and architectural consistency.

Project: Application reference

New


Versatile Mounting & Flexible Light Distribution

Various mounting options— recessed in trim or trimless form, surface-mounted, pendant with direct emission or direct & indirect emission — adapt SPACE 40 PRO to any public spatial composition with elegance and precision.



SPACE 40 PRO – Linear System

New

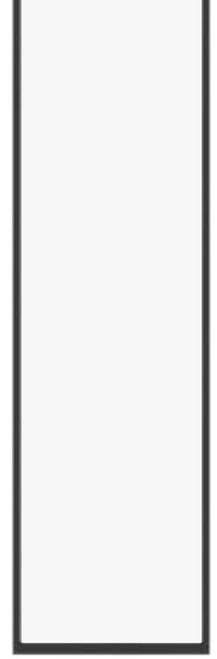

Opal Cover




Microprismatic Cover
**Optional*


- **Profile width:** 45mm, precisely engineered for sleek integration
- **Standard lengths:** 1198mm /1478mm /1828mm /2388mm (including 4mm end caps per side)
- **Mountings:** Pendant (direct /indirect)/ Pendant (direct)/ Surface mounted / Trim Recessed /Trimless Recessed
- **Connecting modules:** L-corner, T-corner, X-corner options
- **Tailored lengths configuration:** Tailored in **70** mm increments, length range **560-2800** mm.

Standard Lengths:

**Including 8mm endcap kit from two sid*

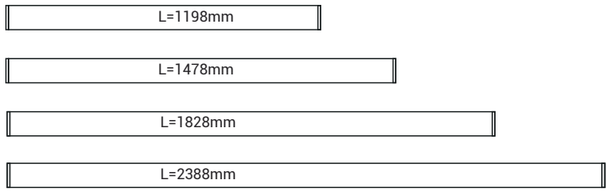

Mountings:

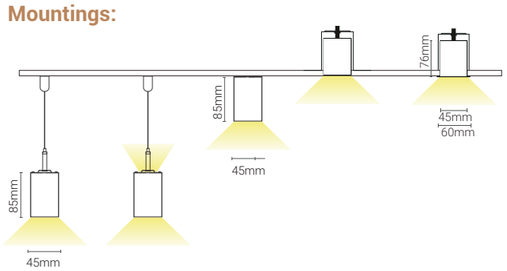

Tailored length:



Tailored increment unit in* **70mm


SPACE 40 PRO – Linear System

New




Project: Application reference

Quick Connector for Fast Installation

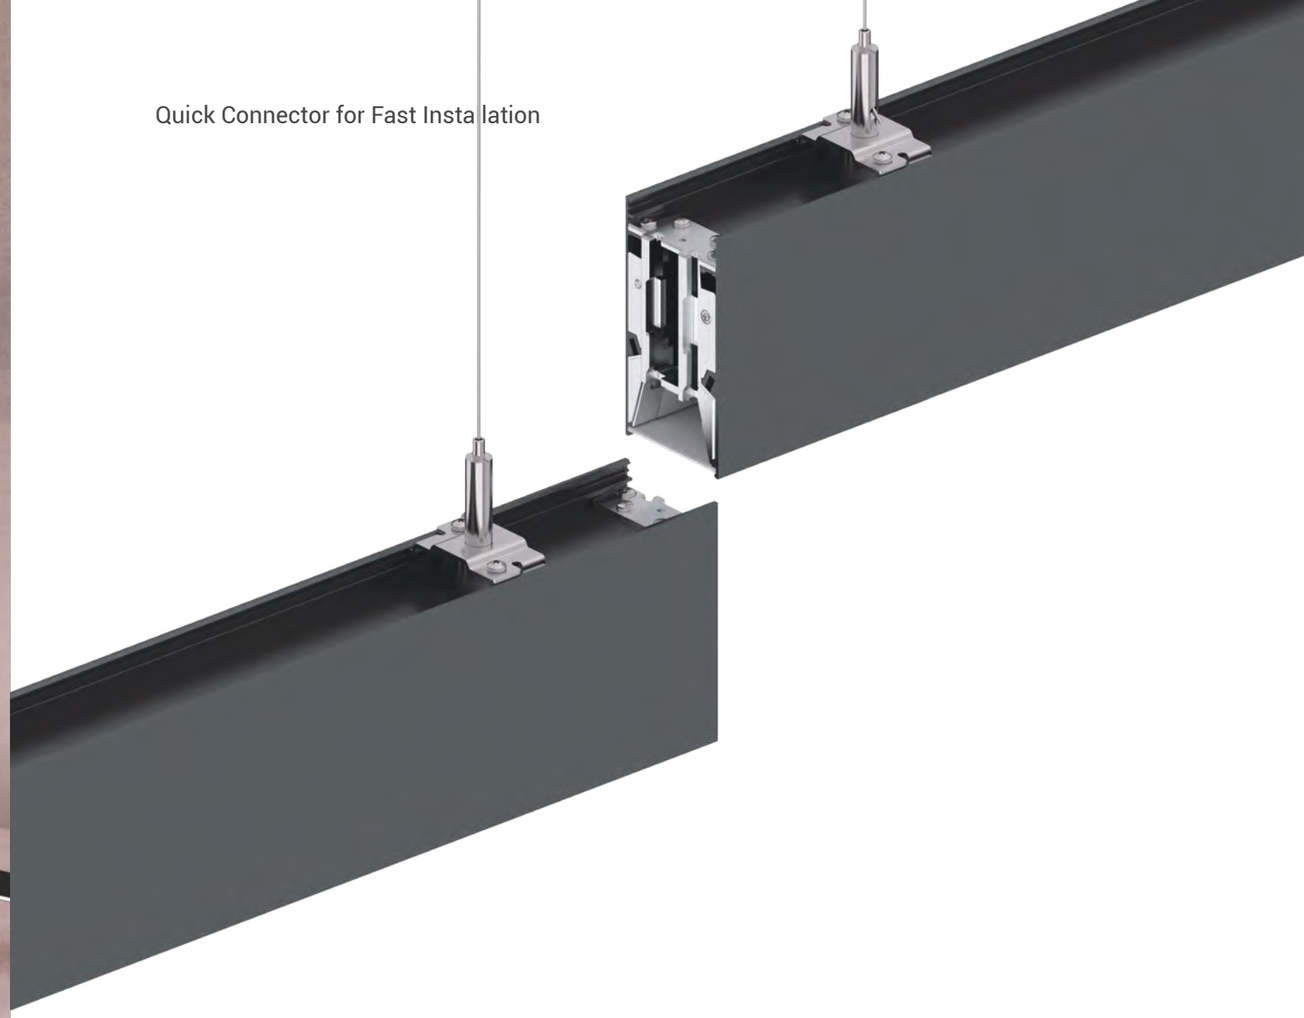


Product Features:

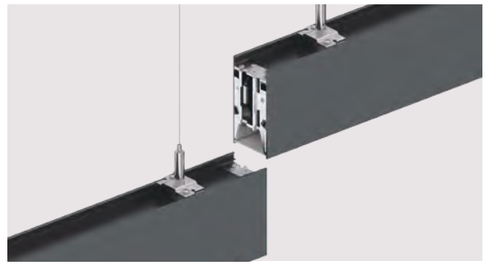


Seamless joints with no light leakage



Customizable shape modules

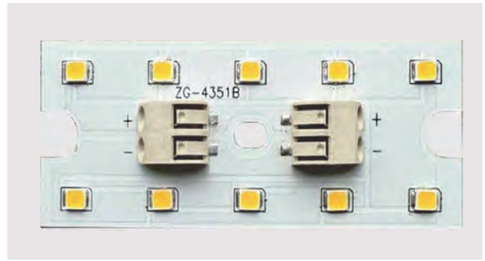

Custom lengths available in 70mm increments

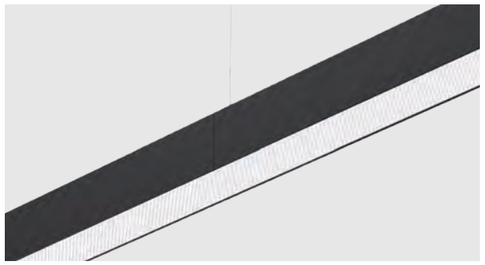


Microprismatic diffuser for visual comfort direct/indirect

SPACE 40 PRO – Pendant Direct & Indirect Linear System


New





Customized Lengths Available:

Endcap Kit=2X4mm

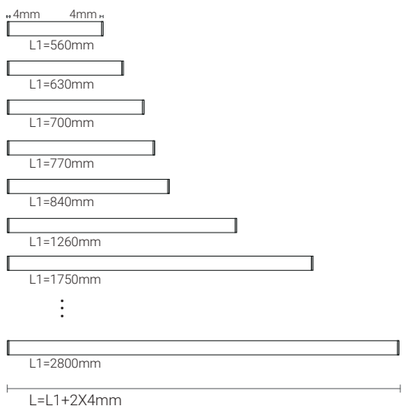

Customized Output:

Direct Lighting: 17W/m, 22W/m 125lm/W, @840

Direct & Indirect Lighting: 22W/m 130lm/W, @840


110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓ 110° ↑
- Lumen Output: Up to 6850lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	105° ↓ 110° ↑	2350lm ↓ 1200lm ↑	SP40LGL119P-840A027F-WN-U
29W	33W	28V	1050mA	1478mm	White	80	4000K	105° ↓ 110° ↑	2900lm ↓ 1450lm ↑	SP40LGL147P-840A033F-WN-U
36W	40W	28V	1300mA	1828mm	White	80	4000K	105° ↓ 110° ↑	3500lm ↓ 1750lm ↑	SP40LGL182P-840A040F-WN-U
47W	52W	28V	1700mA	2388mm	White	80	4000K	105° ↓ 110° ↑	4550lm ↓ 2300lm ↑	SP40LGL238P-840A052F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**A0** 105° ↓ 110° ↑	**27** 27W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP40LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

Project: Application reference

SPACE 40 PRO – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution


3000K





Customized Lengths Available:

Endcap Kit=2X4mm

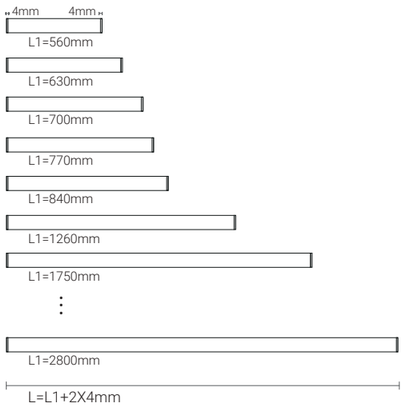

Customized Output:

Direct Lighting: 17W/m, 22W/m 125lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	105°↓	3400lm↓	SP40LGL119P-840A027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	105°↓	4150lm↓	SP40LGL147P-840A033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	105°↓	5000lm↓	SP40LGL182P-840A040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	105°↓	6500lm↓	SP40LGL238P-840A052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**A0** 105° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO – Surface Mounted Linear System

New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Surface Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution


3000K





Customized Lengths Available:

Endcap Kit=2X4mm

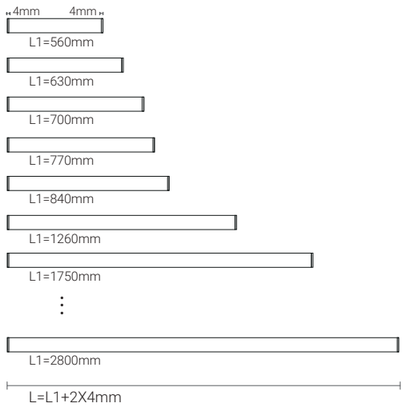

Customized Output:

Direct Lighting: 17W/m, 22W/m 125lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	105°↓	3400lm↓	SP40LGL119C-840A027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	105°↓	4150lm↓	SP40LGL147C-840A033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	105°↓	5000lm↓	SP40LGL182C-840A040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	105°↓	6500lm↓	SP40LGL238C-840A052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119C Pendant 1198mm	**830** CRI80/ 3000K	**A0** 105° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147C Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182C Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238C Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO – Trimless Recessed Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Trimless Recessed Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution


3000K





Customized Lengths Available:

Endcap Kit=2X4mm

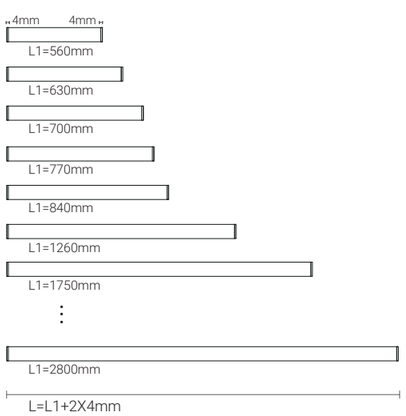

Customized Output:

Direct Lighting: 17W/m, 22W/m 125lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	105° ↓	3400lm ↓	SP40LGL119T-840A027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	105° ↓	4150lm ↓	SP40LGL147T-840A033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	105° ↓	5000lm ↓	SP40LGL182T-840A040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	105° ↓	6500lm ↓	SP40LGL238T-840A052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119T Trimless Recessed 1198mm	**830** CRI80/ 3000K	**A0** 105° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147T Trimless Recessed 1198mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182T Trimless Recessed 1198mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238T Trimless Recessed 1198mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO– Trim Recessed Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Trim Recessed Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution


3000K





Customized Lengths Available:

Endcap Kit=2X11.5mm

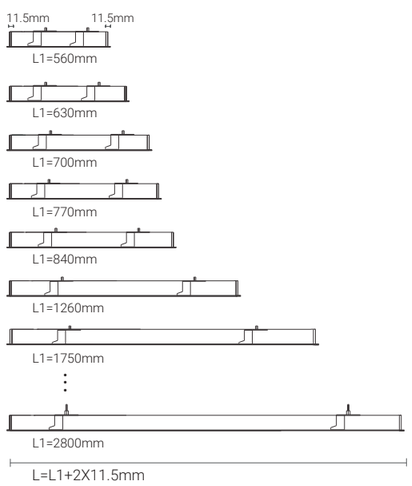

Customized Output:

Direct Lighting: 17W/m, 22W/m 125lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1213mm	White	80	4000K	105° ↓	3400lm ↓	SP40LGL121F-840A027F-WN
29W	33W	28V	1050mA	1493mm	White	80	4000K	105° ↓	4150lm ↓	SP40LGL149F-840A033F-WN
36W	40W	28V	1300mA	1843mm	White	80	4000K	105° ↓	5000lm ↓	SP40LGL184F-840A040F-WN
47W	52W	28V	1700mA	2403mm	White	80	4000K	105° ↓	6500lm ↓	SP40LGL240F-840A052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL121F Trim Recessed 1213mm	**830** CRI80/ 3000K	**A0** 105° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL149F Trim Recessed 1493mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL184F Trim Recessed 1843mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL240F Trim Recessed 2403mm	**940** CRI90/ 4000K		**52** 52W				

New

Curved Composition & Seamless Continuity

Curved linear modules in different radii can be freely combined to form fluid layouts and expressive compositions, enabling continuous light lines that follow architectural movement and spatial flow.

SPACE 40 PRO Curve – Pendant Direct & Indirect linear system


New




110° / 105° | 3000K / 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info


- General Lighting, Pendant Direct & Indirect
- System Power: 10W, 15W, 22W, 23W, 28W, 34W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle:105° ↓ 110° ↑
- Lumen Output: Up to 4500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



1/2 of a Circle




1/4 of a Circle




1/8 of a Circle

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	105° ↓ 110° ↑	2000lm ↓ 1000lm ↑	SP40CGLC06AP-840A023F-WN-U-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	105° ↓ 110° ↑	3000lm ↓ 1500lm ↑	SP40CGLC09AP-840A034F-WN-U-CM
9W	10W	28V	300mA	518mm	White	80	4000K	105° ↓ 110° ↑	900lm ↓ 450lm ↑	SP40CGLC06BP-840A010F-WN-U-CM
13W	15W	28V	500mA	754mm	White	80	4000K	105° ↓ 110° ↑	1300lm ↓ 650lm ↑	SP40CGLC09BP-840A015F-WN-U-CM
21W	23W	28V	750mA	989mm	White	80	4000K	105° ↓ 110° ↑	2000lm ↓ 1000lm ↑	SP40CGLC12BP-840A023F-WN-U-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	105° ↓ 110° ↑	2500lm ↓ 1250lm ↑	SP40CGLC15BP-840A028F-WN-U-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	105° ↓ 110° ↑	3000lm ↓ 1500lm ↑	SP40CGLC18BP-840A034F-WN-U-CM
20W	22W	28V	700mA	966mm	White	80	4000K	105° ↓ 110° ↑	1950lm ↓ 1000lm ↑	SP40CGLC24CP-840A022F-WN-U-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	105° ↓ 110° ↑	2450lm ↓ 1250lm ↑	SP40CGLC30CP-840A028F-WN-U-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A0** 105° ↓ 110° ↑	**10** 10W	**F** On-Off	**W** White	**N** None	**U** With Uplight, Extrusion Cover
SP40CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**15** 15W	**D** DALI Dim	**B** Black		
SP40CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**23** 23W				
SP40CGLC12BP Pendant D1200mm 1/4 of a Circle			**28** 28W				
SP40CGLC15BP Pendant D1500mm 1/4 of a Circle			**34** 34W				
SP40CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP40CGLC24CP Pendant D2400mm 1/8 of a Circle							
SP40CGLC30CP Pendant D3000mm 1/8 of a Circle							



Project: Application reference

SPACE 40 PRO Curve– Pendant Direct linear system


New





105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Version also Available
- System Power: 10W, 15W, 22W, 23W, 28W, 34W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 4250lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

■ 3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC06AP-840A023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC09AP-840A034F-WN-CM
9W	10W	28V	300mA	518mm	White	80	4000K	105°↓	1250lm↓	SP40CGLC06BP-840A010F-WN-CM
13W	15W	28V	500mA	754mm	White	80	4000K	105°↓	1900lm↓	SP40CGLC09BP-840A015F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC12BP-840A023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC15BP-840A028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC18BP-840A034F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	105°↓	2750lm↓	SP40CGLC24CP-840A022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC30CP-840A028F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A0** 105° ↓	**10** 10W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**15** 15W	**D** DALI Dim	**B** Black		
SP40CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**23** 23W				
SP40CGLC12BP Pendant D1200mm 1/4 of a Circle			**28** 28W				
SP40CGLC15BP Pendant D1500mm 1/4 of a Circle			**34** 34W				
SP40CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP40CGLC24CP Pendant D2400mm 1/8 of a Circle							
SP40CGLC30CP Pendant D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve – Surface Mounted Linear System


New





105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Version also Available
- System Power: 10W, 15W, 22W, 23W, 28W, 34W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

■ 3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC06AC-840A023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC09AC-840A034F-WN-CM
9W	10W	28V	300mA	518mm	White	80	4000K	105°↓	1250lm↓	SP40CGLC06BC-840A010F-WN-CM
13W	15W	28V	500mA	754mm	White	80	4000K	105°↓	1900lm↓	SP40CGLC09BC-840A015F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC12BC-840A023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC15BC-840A028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC18BC-840A034F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	105°↓	2750lm↓	SP40CGLC24CC-840A022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC30CC-840A028F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AC Surface D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A0** 105° ↓	**10** 10W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AC Surface D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**15** 15W	**D** DALI Dim	**B** Black		
SP40CGLC06BC Surface D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BC Surface D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**23** 23W				
SP40CGLC12BC Surface D1200mm 1/4 of a Circle			**28** 28W				
SP40CGLC15BC Surface D1500mm 1/4 of a Circle			**34** 34W				
SP40CGLC18BC Surface D1800mm 1/4 of a Circle							
SP40CGLC24CC Surface D2400mm 1/8 of a Circle							
SP40CGLC30CC Surface D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve– Trimless Recessed Linear System


New





105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Trimless Recessed Mounted
- System Power: 10W, 15W, 22W, 23W, 28W, 34W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 4250lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC06AT-840A023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC09AT-840A034F-WN-CM
9W	10W	28V	300mA	518mm	White	80	4000K	105°↓	1250lm↓	SP40CGLC06BT-840A010F-WN-CM
13W	15W	28V	500mA	754mm	White	80	4000K	105°↓	1900lm↓	SP40CGLC09BT-840A015F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC12BT-840A023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC15BT-840A028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC18BT-840A034F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	105°↓	2750lm↓	SP40CGLC24CT-840A022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC30CT-840A028F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AT Trimless Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A0** 105° ↓	**10** 10W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AT Trimless Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**15** 15W	**D** DALI Dim	**B** Black		
SP40CGLC06BT Trimless Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BT Trimless Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**23** 23W				
SP40CGLC12BT Trimless Recessed D1200mm 1/4 of a Circle			**28** 28W				
SP40CGLC15BT Trimless Recessed D1500mm 1/4 of a Circle			**34** 34W				
SP40CGLC18BT Trimless Recessed D1800mm 1/4 of a Circle							
SP40CGLC24CT Trimless Recessed D2400mm 1/8 of a Circle							
SP40CGLC30CT Trimless Recessed D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve – Trim Recessed Linear System


New





105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Trim Recessed Mounted
- System Power: 10W, 15W, 22W, 23W, 28W, 34W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC06AF-840A023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC09AF-840A034F-WN-CM
9W	10W	28V	300mA	518mm	White	80	4000K	105°↓	1250lm↓	SP40CGLC06BF-840A010F-WN-CM
13W	15W	28V	500mA	754mm	White	80	4000K	105°↓	1900lm↓	SP40CGLC09BF-840A015F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	105°↓	2900lm↓	SP40CGLC12BF-840A023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC15BF-840A028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	105°↓	4250lm↓	SP40CGLC18BF-840A034F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	105°↓	2750lm↓	SP40CGLC24CF-840A022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	105°↓	3500lm↓	SP40CGLC30CF-840A028F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AF Trim Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A0** 105° ↓	**10** 10W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AF Trim Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**15** 15W	**D** DALI Dim	**B** Black		
SP40CGLC06BF Trim Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BF Trim Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**23** 23W				
SP40CGLC12BF Trim Recessed D1200mm 1/4 of a Circle			**28** 28W				
SP40CGLC15BF Trim Recessed D1500mm 1/4 of a Circle			**34** 34W				
SP40CGLC18BF Trim Recessed D1800mm 1/4 of a Circle							
SP40CGLC24CF Trim Recessed D2400mm 1/8 of a Circle							
SP40CGLC30CF Trim Recessed D3000mm 1/8 of a Circle							

SPACE 40 PRO – Corner Modules Linear System




105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Corner Modules for Pendant & Surface Mounted & Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim







SP40LLC1M
L Corner



SP40LTC1M
T Corner




SP40LXC1M
X Corner




SP40LLC2M
L Corner

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LLC1M-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LTC1M-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LXC1M-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LLC2M-840A012F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LLC1M L Corner 280*280mm	**830** CRI80/ 3000K	**A0** 105° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP40LTC1M T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP40LXC1M X Corner 280*280mm	**930** CRI90/ 3000K						
SP40LLC2M L corner(135°) 280*280mm	**940** CRI90/ 4000K						

SPACE 40 PRO – Corner Modules for Trim Recessed Linear SystemLinear System




105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Corner Modules for Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim







SP40LLC1F
L Corner



SP40LTC1F
T Corner




SP40LXC1F
X Corner




SP40LLC2F
L Corner

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LLC1F-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LTC1F-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LXC1F-840A012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	105°	1350lm	SP40LLC2F-840A012F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LLC1F Trim Recessed L Corner 280*280mm	**830** CRI80/ 3000K	**A0** 105° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP40LTC1F Trim Recessed T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP40LXC1F Trim Recessed X Corner 280*280mm	**930** CRI90/ 3000K						
SP40LLC2F Trim Recessed L corner(135°) 280*280mm	**940** CRI90/ 4000K						

New

Non-standard lengths



SP40L
Single
560~2800mm



SP40L-M/SP40L-CM
Lines
560~2800mm



SP40L-U-M/SP40L-U-CM
Line Uplight Moudles
560~2800mm



SP40L-F-C
Lines
560~2800mm


L / T / X /A1/4 Circle Corners



SP40LLC1M
L Corner
280*280mm



SP40LTC1M
T Corner
280*280mm



SP40LXC1M
X Corner
280*280mm



SP40CC06B
Arc-corner
inner radius120/240


L / T / X Corners



SP40LLC1F
L Corner
280*280mm
For Trim Recessed Mounted



SP40LTC1F
T Corner
280*280mm
For Trim Recessed Mounted



SP40LXC1F
X Corner
280*280mm
For Trim Recessed Mounted



SP40-ECK
End Caps
W60 H76mm
For Trim Recessed Mounted

Installation Kits



SP40-ECK
End Caps
W45 H85mm
For Pendant & Surface Mounted
& Trimless Recessed Mounted



SP40-TRK
For Trimless Recessed Mounted



SP40-FRK
For Trim Recessed Mounted



SP40-PK2
SP40-PWK(no Ceiling Box)
Suspension Mounting
2m
For Pendant

Installation Kits




SP40-SMK
Surface Mounting
For Surface Mounted




SP40-FCK(ON/OF)
SP40-DCK(DALI)
2.5mm




SP40-FOPC
Opal Cover
Roll 30m



SP40-FMPC
Microprismatic Cover
Roll 30m

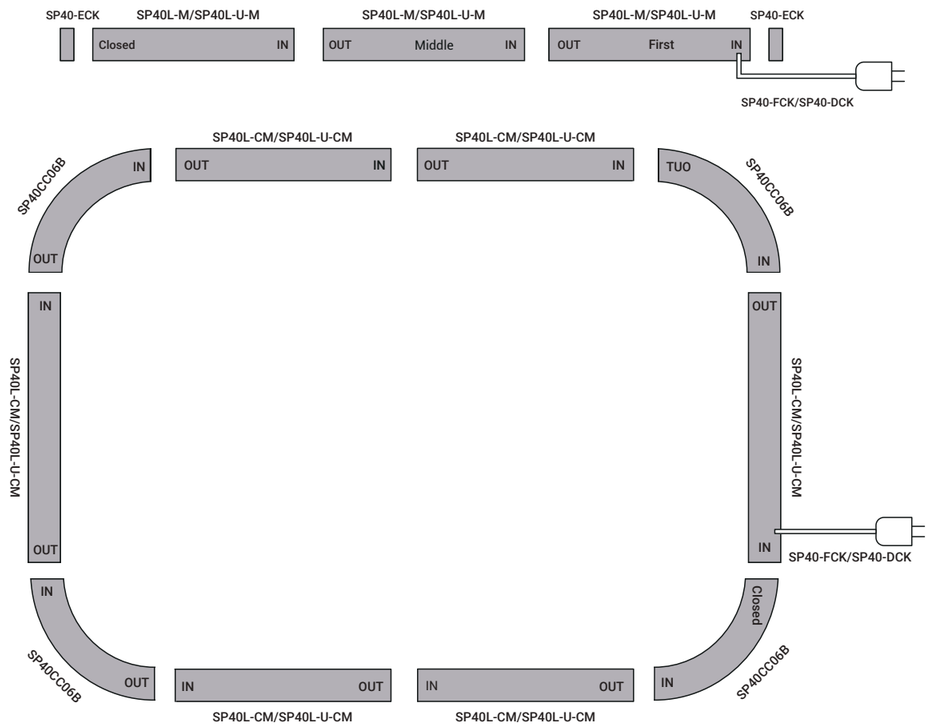

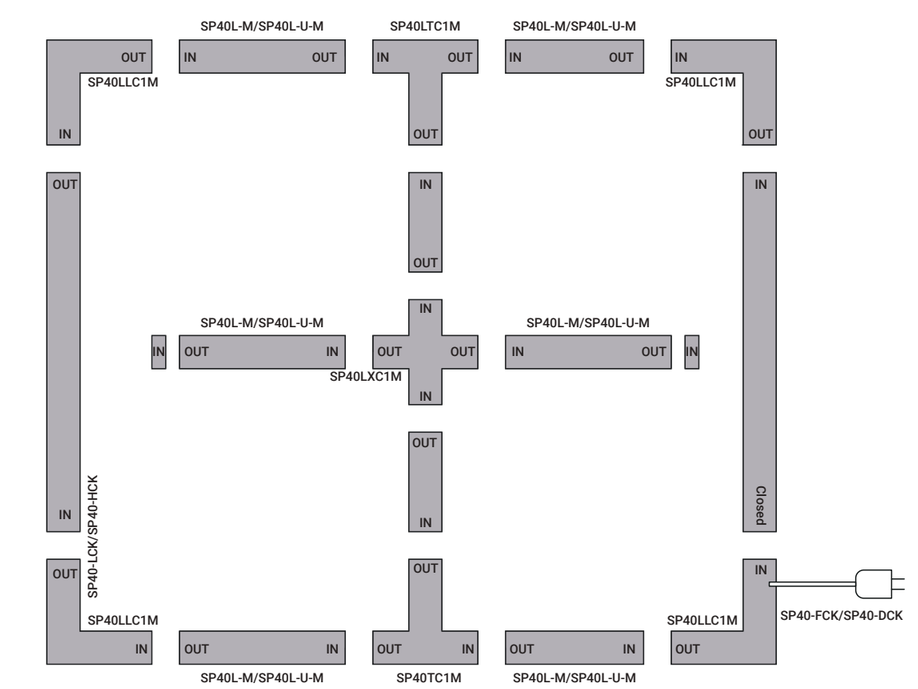

SPACE 40 PRO Ring

40 mm circular light for public spaces
Available in multiple size & mounting options
Clean circle with controlled light distribution
For public and circulation areas




Project: Application reference

New


The **SPACE 40 PRO Ring** is a circular luminaire intended for public interiors and shared spaces.
It incorporates a continuous 40 mm light emission profile and is available in multiple diameters to suit different spatial scales.
Pendant, surface-mounted and trim recessed mounting options enable flexible integration into a wide range of architectural environments.
Its clean circular geometry and controlled light distribution help define areas and create visual focus within open spaces.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

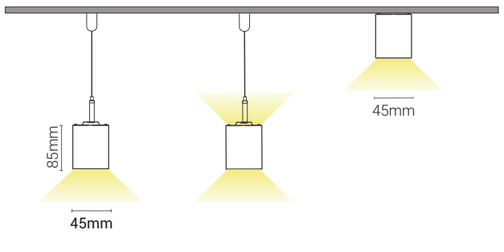

Pendant and Surface-Mounted

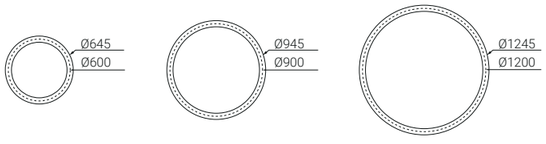


New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 42W, 55W, 84W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓ 110° ↑
- Lumen Output: Up to 7300lm ↓ 3650lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W ↓ 12W ↑	28W ↓ 14W ↑	33V	1350mA	Ø645mm	White 80	4000K	105° ↓	110° ↑	3700lm ↓ 1850lm ↑	SP40CGLD094P-840A0042F-WN-U
35W ↓ 38W ↑	38W ↓ 17W ↑	33V	1850mA	Ø945mm	White 80	4000K	105° ↓	110° ↑	5000lm ↓ 2500lm ↑	SP40CGLD094P-840A0055F-WN-U
52W ↓ 27W ↑	55W ↓ 29W ↑	33V	2250mA	Ø2700mm	White 80	4000K	105° ↓	110° ↑	7300lm ↓ 3650lm ↑	SP40CGLD124P-840A0084F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064P Pendant Ø645mm	**830** CRI>80/ 3000K	**A0** 105° ↓ 110° ↑	**042** 42W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP40CGLD094P Pendant Ø945mm	**840** CRI>80/ 4000K		**055** 55W	**D** DALI Dim	**B** Black		
SP40CGLD124P Pendant Ø1245mm			**084** 84W				

SPACE 40 PRO Ring – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 28W, 38W, 55W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	Ø645mm	White	80	4000K	105° ↓	3500lm	SP40CGLD064P-840A0028F-WN
35W	38W	33V	1250mA	Ø945mm	White	80	4000K	105° ↓	4750lm	SP40CGLD094P-840A0038F-WN
52W	55W	33V	1750mA	Ø1245mm	White	80	4000K	105° ↓	6900lm	SP40CGLD124P-840A0055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064P Pendant Ø645mm	**830** CRI>80/ 3000K	**A0** 105°↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP40CGLD094P Pendant Ø945mm	**840** CRI>80/ 4000K		**038** 38W	**D** DALI Dim	**B** Black		
SP40CGLD124P Pendant Ø1245mm			**055** 55W				

SPACE 40 PRO Ring – Surface Mounted Linear System

New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- System Power: 28W, 38W, 55W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	Ø645mm	White	80	4000K	105° ↓	3500lm	SP40CGLD064C-840A0028F-WN
35W	38W	33V	1250mA	Ø945mm	White	80	4000K	105° ↓	4750lm	SP40CGLD094C-840A0038F-WN
52W	55W	33V	1750mA	Ø1245mm	White	80	4000K	105° ↓	6900lm	SP40CGLD124C-840A0055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064C Ceiling Ø645mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP40CGLD094C Ceiling Ø945mm	**840** CRI>80/ 4000K		**038** 38W	**D** DALI Dim	**B** Black		
SP40CGLD124C CeilingØ1245mm			**055** 55W				

SPACE 40 PRO
Hexagon

A geometric light with a slim 40 mm profile
Available in two size
Flexible mounting configurations
Two light distributions available
For corridors, circulation and public spaces



Project: Application reference


SPACE 40 PRO Hexagon – Linear System

New


The **SPACE 40 PRO Hexagon** is a geometric luminaire designed for public and circulation areas.
It features a 40 mm light emission profile and is available in two size options, with pendant, surface-mounted and trim recessed installation.
The hexagonal form allows structured layouts and repeatable compositions across larger spaces.
With direct or direct/indirect light distribution available, SPACE 40 PRO Hexagon supports clear spatial organisation with a refined architectural presence.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

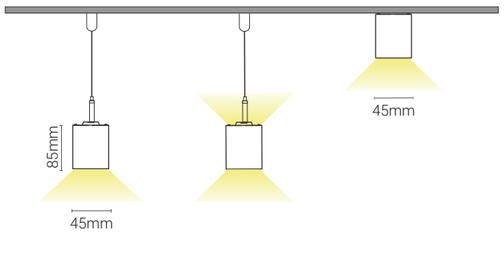

Pendant and Surface-Mounted



SPACE 40 PRO Hexagon – Pendant Direct & Indirect Linear System


New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 55W ↓ 27W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 110° ↑
- Lumen Output: Up to 7200 ↓ 3600lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

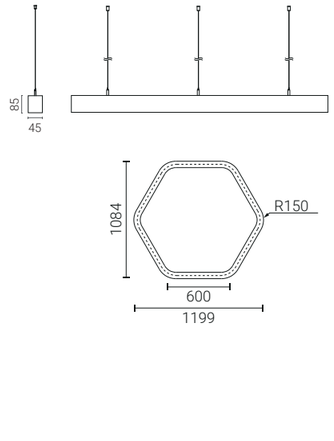

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W ↓ 24W ↑	55W ↓ 27W ↑	33V	2650mA	600mm	White	80	4000K	105° ↓ 110° ↑	7200lm ↓ 3600lm ↑	SP40CGLH060P-840A0082F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH040P Pendant 600mm	830 CRI>80/ 3000K	A0 105° ↓ 110° ↑	082 82W	F On-Off D DALI Dim	W White B Black	N None	U Uplight

SPACE 40 PRO Hexagon – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct
- System Power: 55W,; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1750mA	600mm	White	80	4000K	105° ↓	6900lm	SP40CGLH060P-840A055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH040P Pendant 600mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
	840 CRI>80/ 4000K		**070** 70W	**D** DALI Dim	**B** Black		

SPACE 40 PRO Hexagon – Surface Mounted Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Surface Mounted
- System Power: 55W, CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1750mA	600mm	White	80	4000K	105° ↓	6900lm	SP40CGLH060C-840A055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH060C Ceiling 600mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
	840 CRI>80/ 4000K			**D** DALI Dim	**B** Black		

SPACE 40 EVO Oval

An oval light with a slim 40 mm profile
Frames an area with continuous, even light
Available in multiple mounting options
Suitable for shared areas and public interiors



Project: Application reference


SPACE 40 EVO Oval – Linear System

New


The **SPACE 40 EVO Oval** is an oval-shaped luminaire developed for balanced illumination in public and transitional spaces.
With an elongated form and a 40 mm light emission profile, it provides even light coverage across wider areas.
Available in pendant, surface-mounted and trim recessed versions, the luminaire adapts easily to different spatial layouts.
By delivering continuous, uniform light, SPACE 40 EVO Oval gently frames areas and supports visual balance in public interiors.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

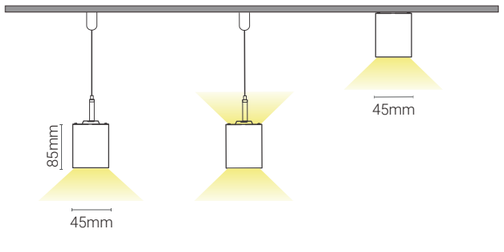

Pendant and Surface-Mounted



SPACE 40 EVO Oval – Pendant Direct Linear System


New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 28W ↓ 14W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓ 110° ↑
- Lumen Output: Up to 3700lm ↓ 1850lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

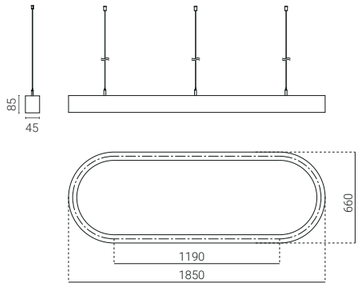

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W ↓ 12W ↑	28W ↓ 14W ↑	33V	1350mA	660mm	White	80	4000K	105° ↓ 110° ↑	3700lm ↓ 1850lm ↑	SP40CCLR066P-840A0042F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066P Pendant 660mm	830 CRI>80/ 3000K	A0 105° ↓ 110° ↑	042 042W	F On-Off	W White	N None	U Uplight
	840 CRI>80/ 4000K			D DALI Dim	B Black		

SPACE 40 EVO Oval – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 28W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 3500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

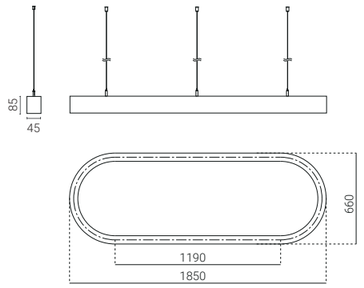

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	660mm	White	80	4000K	105° ↓	3500lm	SP40CCLR066P-840A0028F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066P Pendant 660mm	830 CRI>80/ 3000K	A0 105° ↓	028 28W	F On-Off	W White	N None	
	840 CRI>80/ 4000K			D DALI Dim	B Black		

SPACE 40 EVO Oval – Surface Mounted Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- System Power: 28W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 3500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

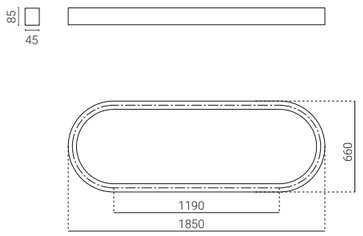

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	660mm	White	80	4000K	105° ↓	3500lm	SP40CCLR066C-840A0028F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066C Ceiling 660mm	830 CRI>80/ 3000K	A0 105° ↓	061 61W	F On-Off	W White	N None	
	840 CRI>80/ 4000K			D DALI Dim	B Black		

MODULINE 05

The ultra-slim 24V modular linear system.

Epitomizing minimalist elegance, boasting an ultra-slim track with a 5mm width aperture.


Its seamless integration into any environment ensures a natural and effortless aesthetic, ideal for residential, retail, or any setting where sleek design reigns supreme.








Project: Application reference

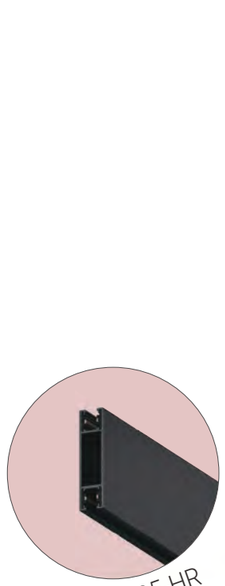


ML05-HR



ML05-SM




ML05-TR



ML05-HR




ML05-SM



ML05-TR





Surface-mounted Tack

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Surface Mounted Track Rail	ML05-SM1000-B	ML05-SM1000-W
2000mm	Surface Mounted Track Rail	ML05-SM2000-B	ML05-SM2000-W
3000mm	Surface Mounted Track Rail	ML05-SM3000-B	ML05-SM3000-W

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000



Power Feeder Unit
ML05-PF-B/W



Flexible Continuous Kit
ML05-CKF-B/W



L Shape Horizontal Connector
ML05-SMLHC-B/W



L Shape Vertical Connector
ML05-SMLVC-B/W



Endcap Kits
ML05-SMEK-B/W

Trimless-recessed Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Trimless-recessed Track Rail	ML05-TR1000-B	ML05-TR1000-W
2000mm	Trimless-recessed Track Rail	ML05-TR2000-B	ML05-TR2000-W
3000mm	Trimless-recessed Track Rail	ML05-TR3000-B	ML05-TR3000-W

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000



Power Feeder Unit
ML05-PF-B/W



Flexible Continuous Kit
ML05-CKF-B/W



L Shape Horizontal Connector
ML05-TRELHC-B/W




L Shape Vertical Connector
ML05-TRELVC-B/W



Endcap Kits
LX05-TREEK-B/W





Pendant H Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Pendant H Track Rail	ML05-HR1000-B	ML05-HR1000-W
2000mm	Pendant H Track Rail	ML05-HR2000-B	ML05-HR2000-W
3000mm	Pendant H Track Rail	ML05-HR3000-B	ML05-HR3000-W

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000



Power Feeder Unit
ML05-PF-P-B/W



Flexible Continuous Kit
ML05-CKF-B/W



Flexible Continuous Kit
ML05-UCKF-B/W



L Shape Horizontal Connector
ML05-HRLHC-B/W



Mechanical Linear Connector
ML05-HRLC



Endcap Kits
LX05-HREK-B/W



Pendant H Track Pendant Kits
ML05-PK-H-B/W



Pendant H Track Pendant Wire Kits
ML05-PWK-H




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 280lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

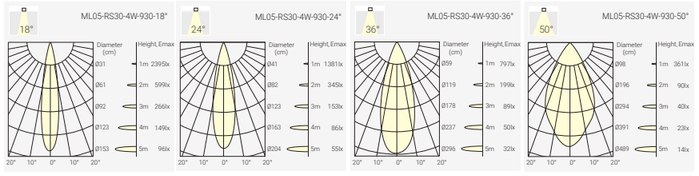

Finish



White Black

Order Info (ML05-RS30 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	4W	24V	90	2700K	18°	370lm	250lm	MSR1-9271804N-BB
					24°	370lm	250lm	MSR1-9272404N-BB
					36°	370lm	250lm	MSR1-9273604N-BB
					50°	370lm	250lm	MSR1-9275004N-BB
				3000K	18°	400lm	260lm	MSR1-9301804N-BB
					24°	400lm	260lm	MSR1-9302404N-BB
					36°	400lm	260lm	MSR1-9303604N-BB
					50°	400lm	260lm	MSR1-9305004N-BB
				4000K	18°	440lm	280lm	MSR1-9401804N-BB
					24°	440lm	280lm	MSR1-9402404N-BB
					36°	440lm	280lm	MSR1-9403604N-BB
					50°	440lm	280lm	MSR1-9405004N-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR1-9301804F with Honeycomb
MSR1-9301804F-**H**

Coding

MSR1	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR1 ML05-RS30 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**04** 3.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
		50 50°		**A** 1-10V Dim			
				D DALI Dim			




18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

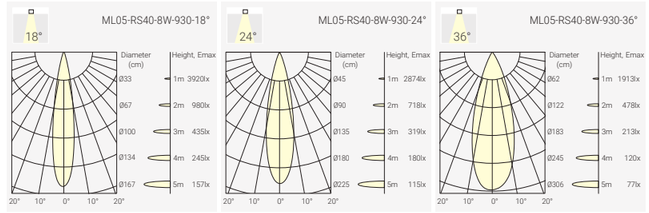

Finish



White Black

Order Info (ML05-RS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	24V	90	2700K	18°	900lm	520lm	MSR2-9271808F-BB
					24°	900lm	520lm	MSR2-9271824F-BB
					36°	900lm	520lm	MSR2-9271836F-BB
				3000K	18°	950lm	550lm	MSR2-9301808F-BB
					24°	950lm	550lm	MSR2-9302408F-BB
					36°	950lm	550lm	MSR2-9303608F-BB
				4000K	18°	1000lm	600lm	MSR2-9401808F-BB
					24°	1000lm	600lm	MSR2-9402408F-BB
					36°	1000lm	600lm	MSR2-9403608F-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR2-9301808F with Honeycomb
MSR2-9301808F-**H**

Coding

MSR2	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR2 ML05-RS40 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

MODULINE 05 – The Ultra-slim 24V Modular Linear System



110° | 2700K 3000K 4000K | CRI >90 | 24V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info


- System: 6W, 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim




ML05-GL1250: 1250mm
ML05-GL2500: 2500mm

Light Distribution

3000K





Order Info (ML05-GL1250 in Black Adapter as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	24V	90	2700K	110°	650lm	230lm	MSG1-927A106N-BN
				3000K	110°	700lm	250lm	MSG1-930A106N-BN
				4000K	110°	750lm	275lm	MSG1-940A106N-BN
11W	12W	24V	90	2700K	110°	1300lm	460lm	MSG2-927A112N-BN
				3000K	110°	1400lm	500lm	MSG2-930A112N-BN
				4000K	110°	1500lm	550lm	MSG2-940A112N-BN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MSG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Adaoter Finish	Reflector Color	Accessory
MSG1 ML05-GL1250	**927** CRI>90/ 2700K	**A1** 110°	**06** 6W	**N** No Driver	**W** White	**N** None	
MSG2 ML05-GL2500	**930** CRI>90/ 3000K		**12** 12W	**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			



MODULINE 26

48V Low Voltage Minimalist Modular Linear Track System
Trim & Trimless Recessed, Surface Mounted,
Pendant, Pendant H Track
Various Light Insets for Different Applications





Project: Carita Project in Paris, France



Project: Cocina Departamento Fray Bernardo, Chile



Project: Private Apartment, Moscow, Russia



Project: NOA, Israel


MODULINE 26 – 48V Low Voltage Modular Linear System

Project: Museum Amos Rex, Finland



MODULINE 26 – 48V Low Voltage Modular Linear System

1 H Track




2 Standard Track



3 Slim Track



4 Trim Recessed Track



5 Trimless Recessed Track-EI



6 Trimless Recessed Track



Spotlight Inset



ML26-RS25-3W



ML26-RS25-5W



ML26-RS40-8W



ML26-RS40-16W



ML26-RS40-12W



ML26-RS40-24W



ML26-RS55-14W



ML26-RT55-10W



ML26-RS72-19W
ML26-RS72-26W



ML26-FRS72-10W



ML26-FRS72-20W



ML26-RS96-9W



ML26-RB120-5W
ML26-RB150-7W



ML26-FRD80-10W



ML26-FSD80-10W



ML26-FRDH80-10W



ML26-FSDH80-10W

Accent Light Inset



New

ML26-LA240-13W
ML26-LA470-26W



ML26-AL190-3W
ML26-AL190-7W



ML26-AL280-9W



ML26-AL560-26W



ML26-SA280-13W

General Light Inset



New

ML26-LG470-13W
ML26-LG700-19W
ML26-LG925-26W



ML26-CL280-7W/ 10W
ML26-CL560-13W/ 19W
ML26-CL840-19W/ 26W
ML26-CL1120-26W



ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W



ML26-SG280-7W/ 10W



ML26-WW280-7W
ML26-WW560-13W

Pendant Light Inset



ML26-PS60-5W




ML26-PB120-5W
ML26-PB150-7W



ML26-PS40-12W



ML26-PS55-10W

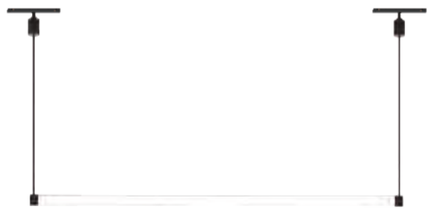

ML26-NHP10-14W




ML26-NHU12-19W




ML26-NVP12-19W

MODULINE 26 – 48V Low Voltage Modular Linear System


Surface Mounted/ Pendant Version

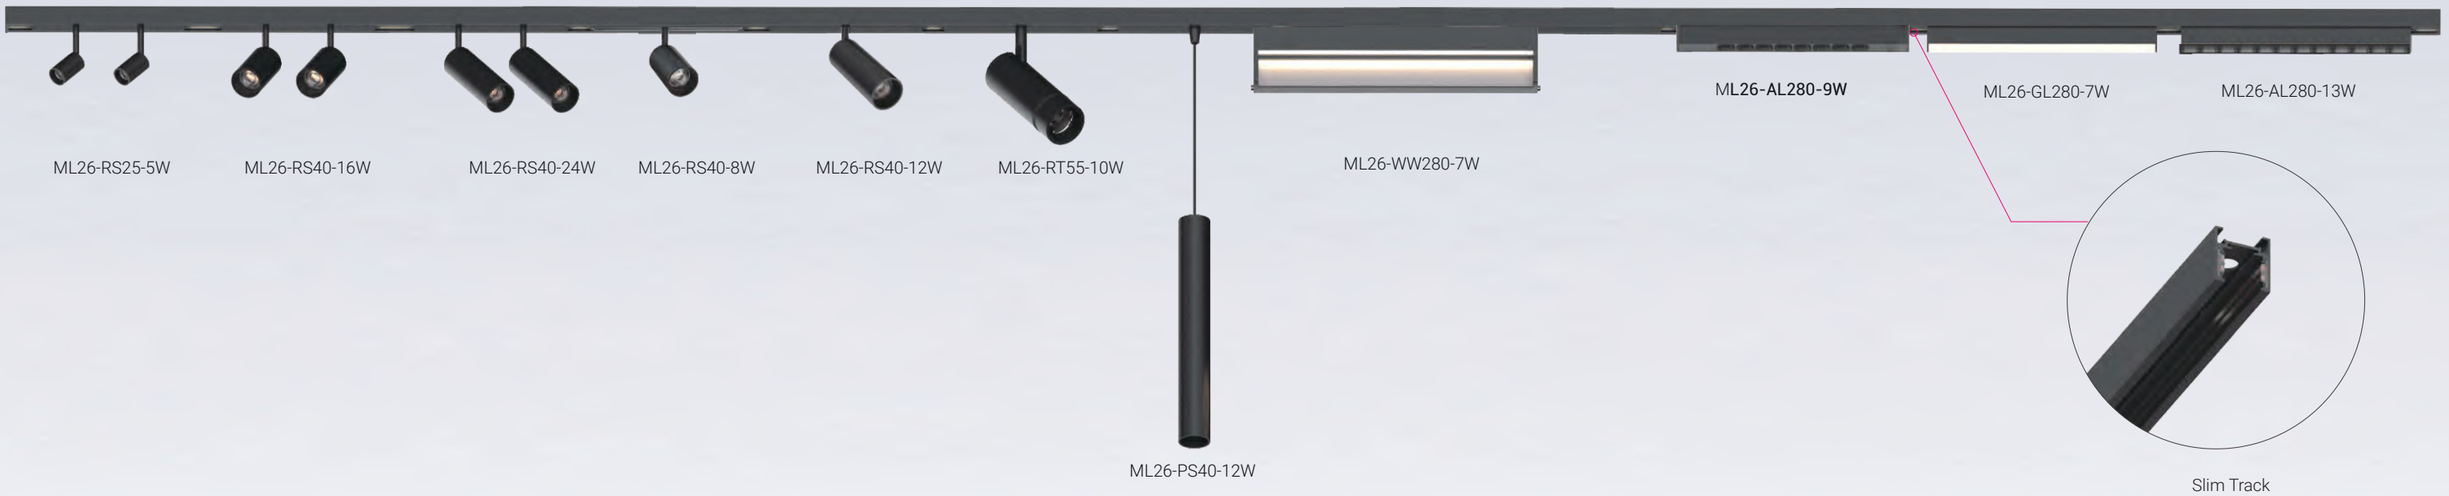

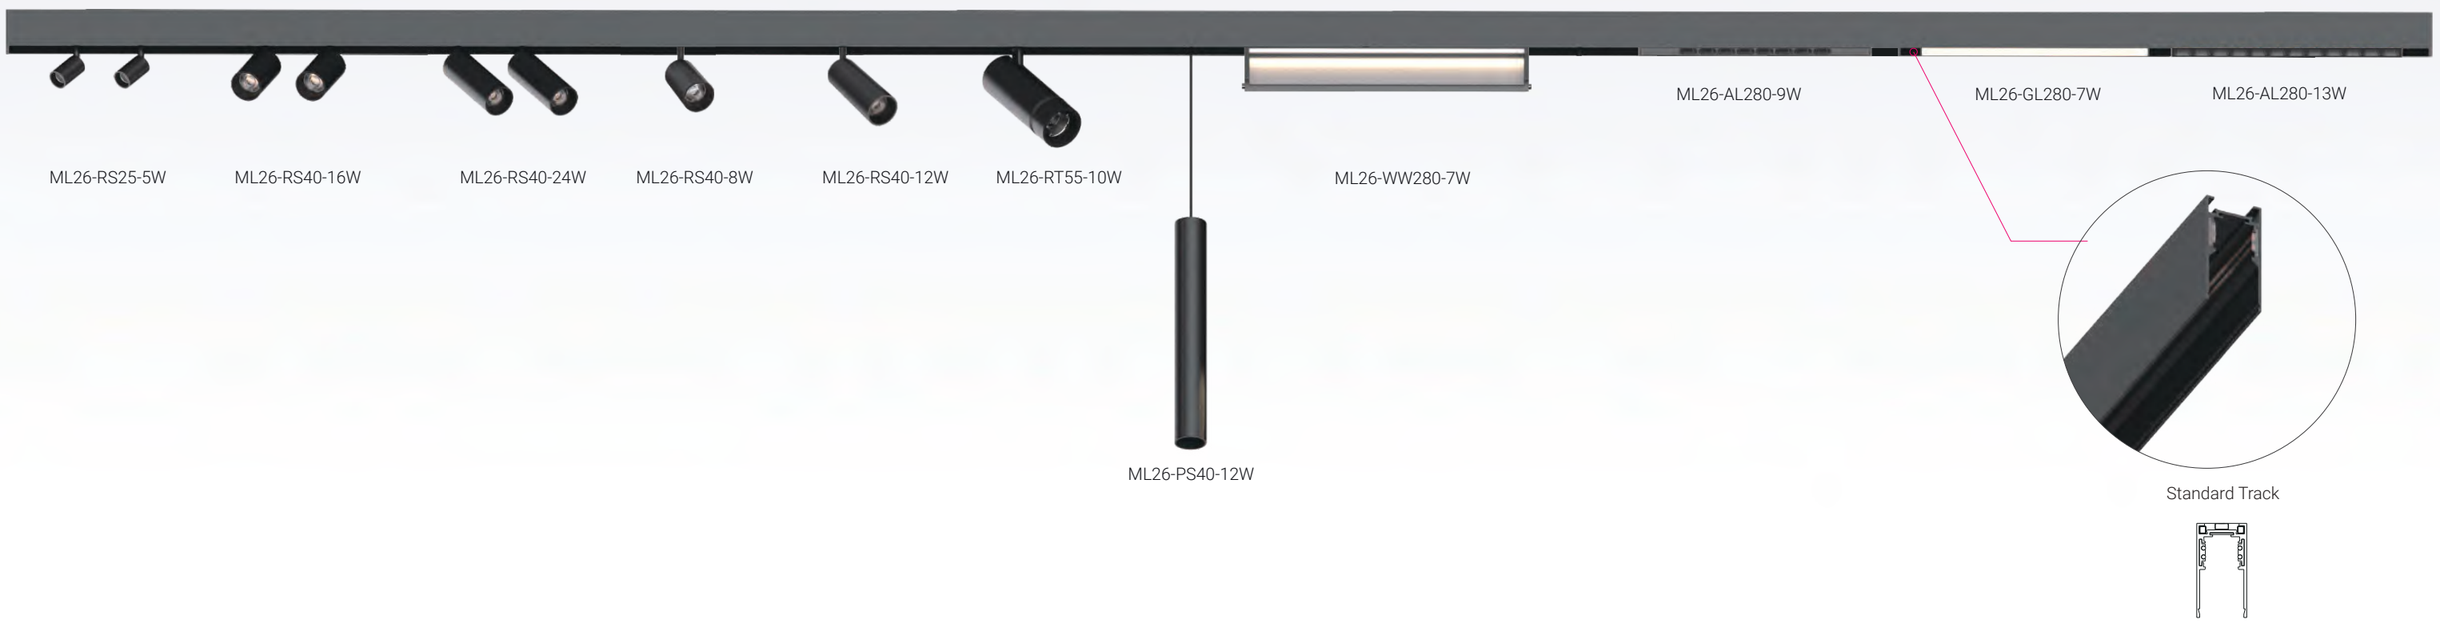


MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Version

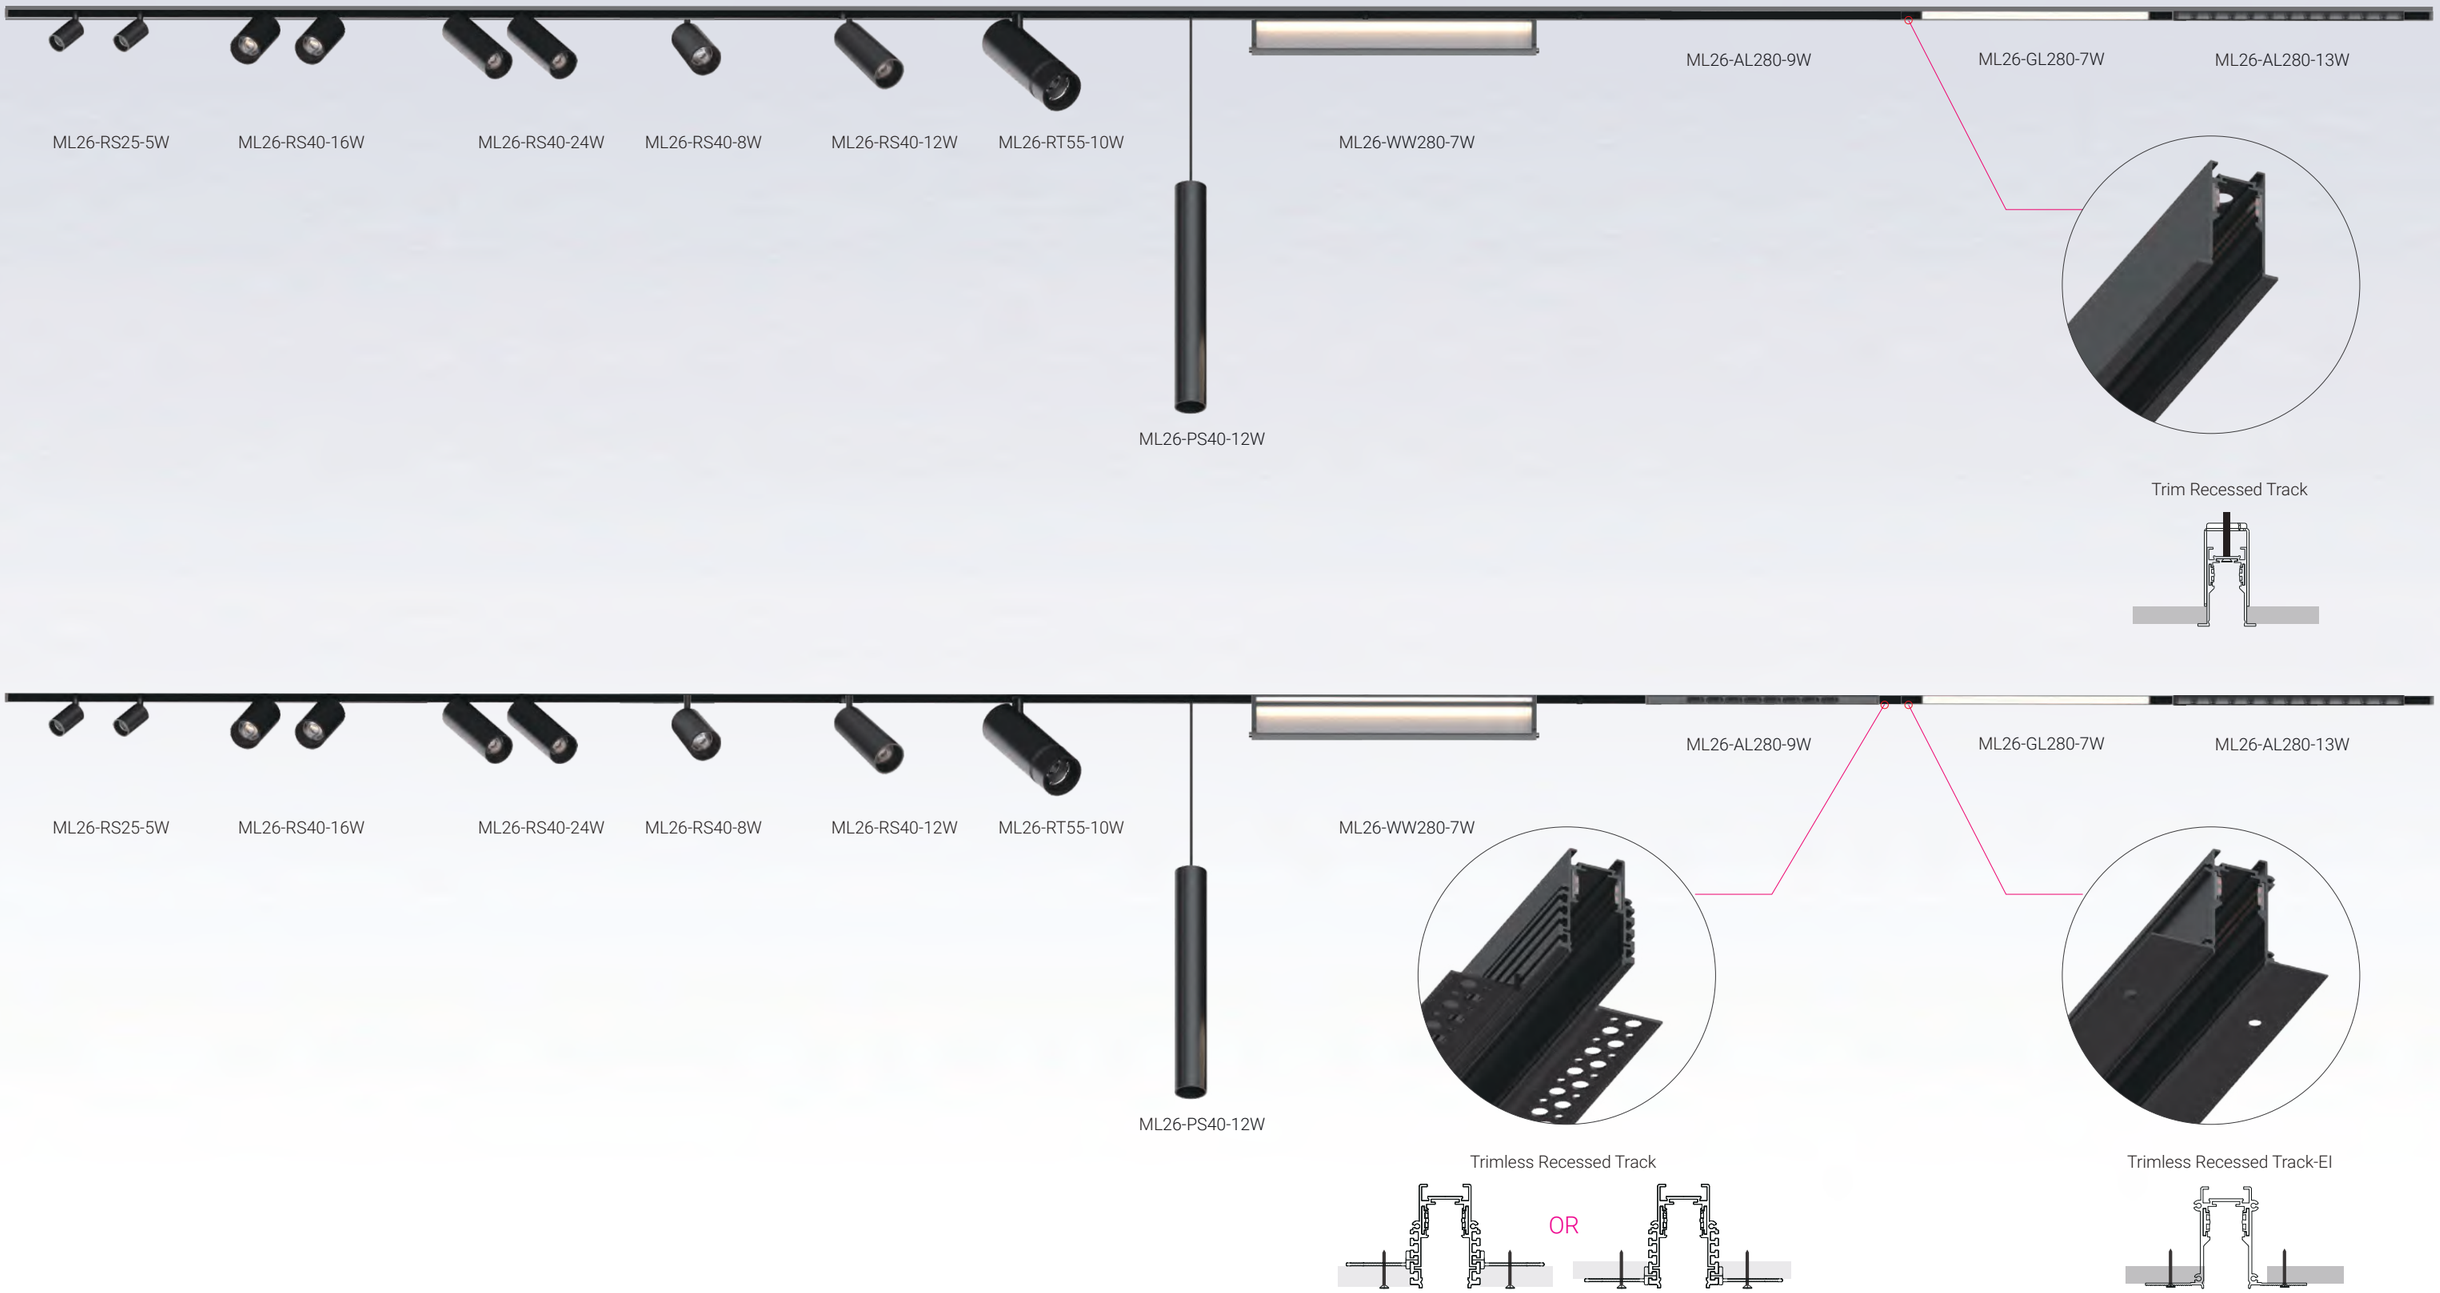


MODULINE 26 – 48V Low Voltage Modular Linear System

Pendant Version-H Track

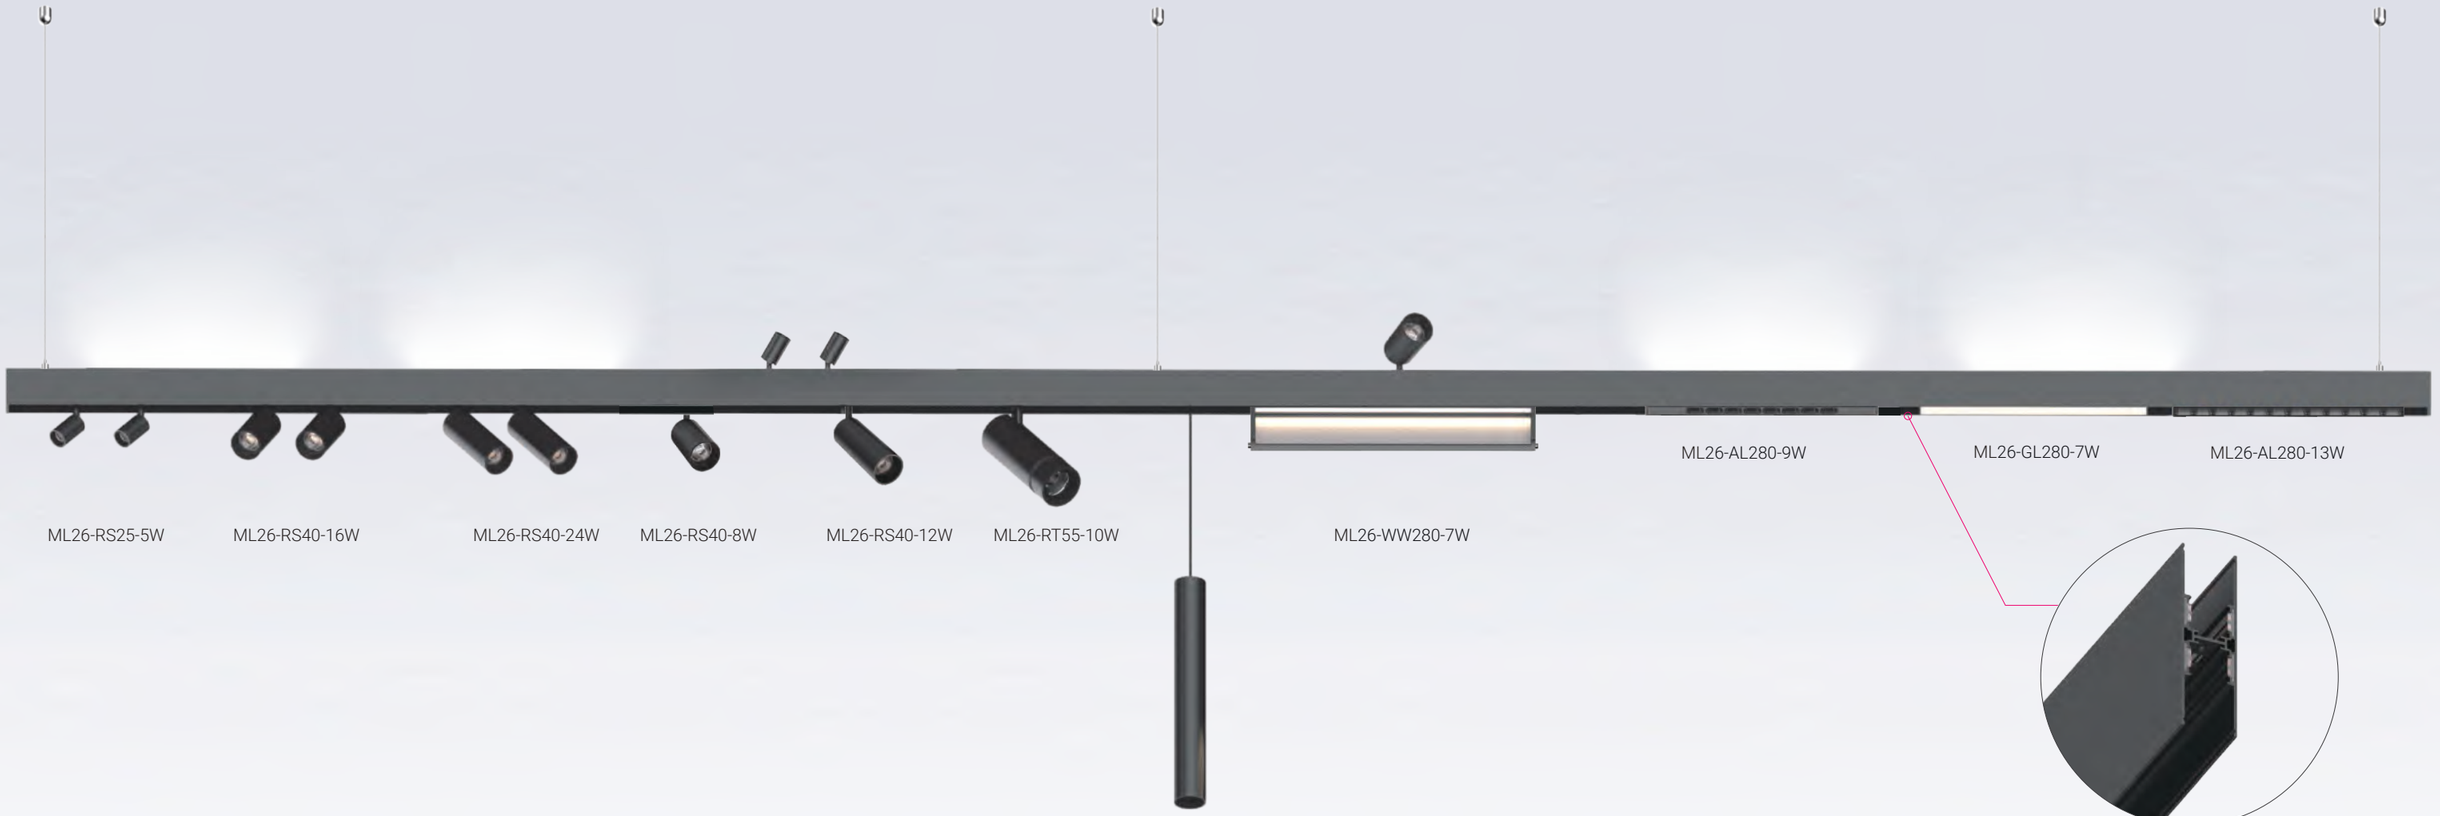


ML26-RS25-5W
ML26-RS40-16W
ML26-RS40-24W
ML26-RS40-8W
ML26-RS40-12W
ML26-RT55-10W
ML26-WW280-7W
ML26-AL280-9W
ML26-GL280-7W
ML26-AL280-13W
ML26-PS40-12W

H Track



MODULINE 26 – 48V Low Voltage Modular Linear System

Slim Track Configuration

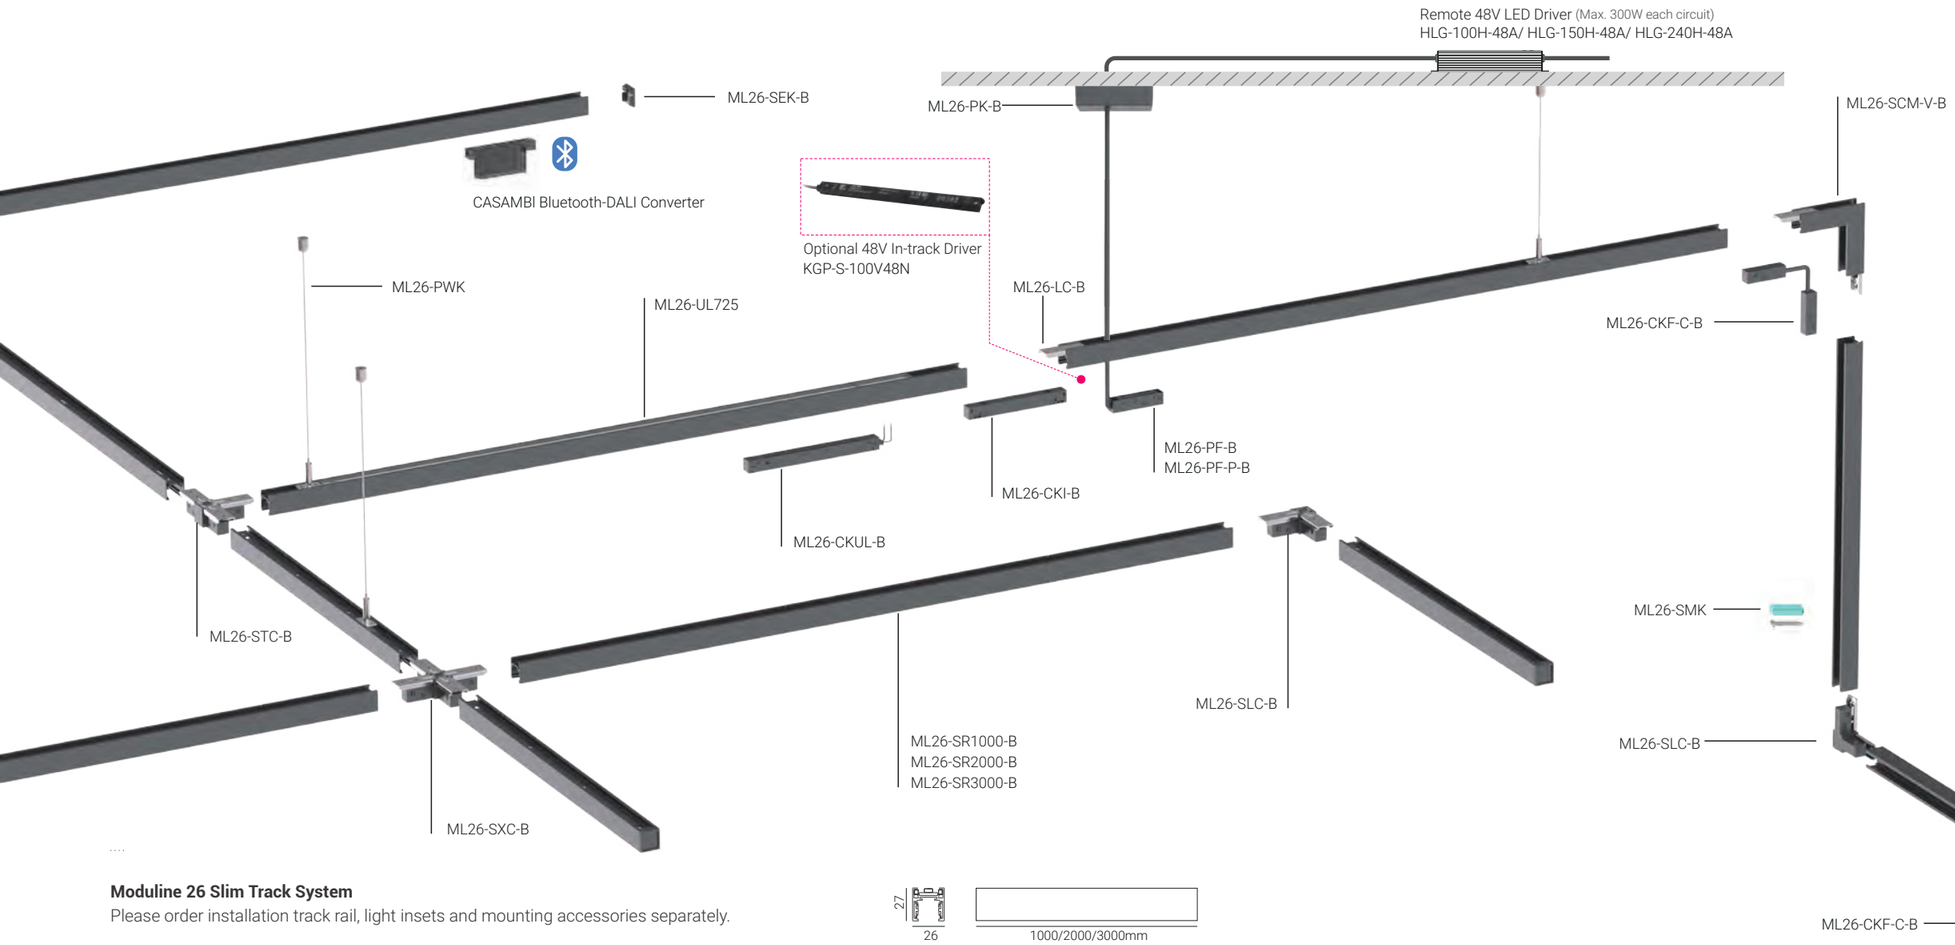

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Slim Track System

Please order installation track rail, light insets and mounting accessories separately.

Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC-B	ML26-LC-W
Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	
CASAMBI Bluetooth-DALI Converter	ML26-CBDC-B	

*Continuous Kit needs to be used together with Linear Connector as a set.


Insets



* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

Standard Track Configuration

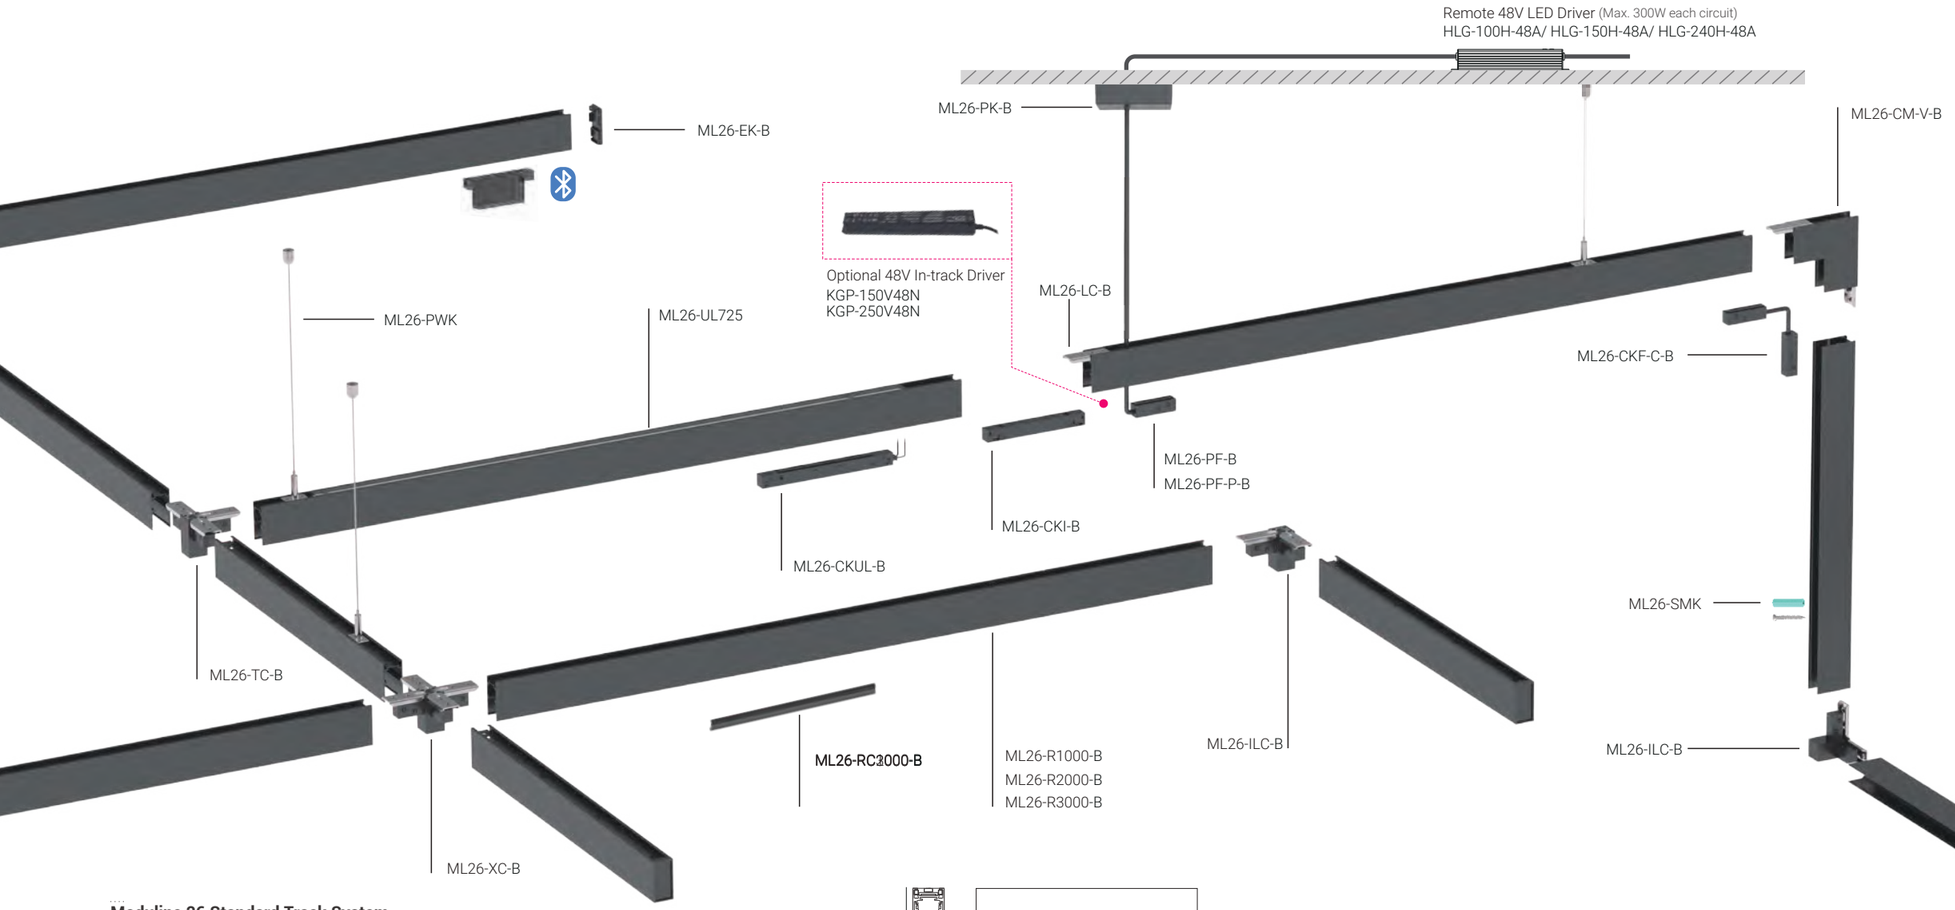

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Standard Track System

Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-ILC-B	ML26-ILC-W
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC-B	ML26-LC-W
Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	
CASAMBI Bluetooth-DALI Converter	ML26-CBDC-B	

*Continuous Kit needs to be used together with Linear Connector as a set.

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight



* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

H Track Configuration

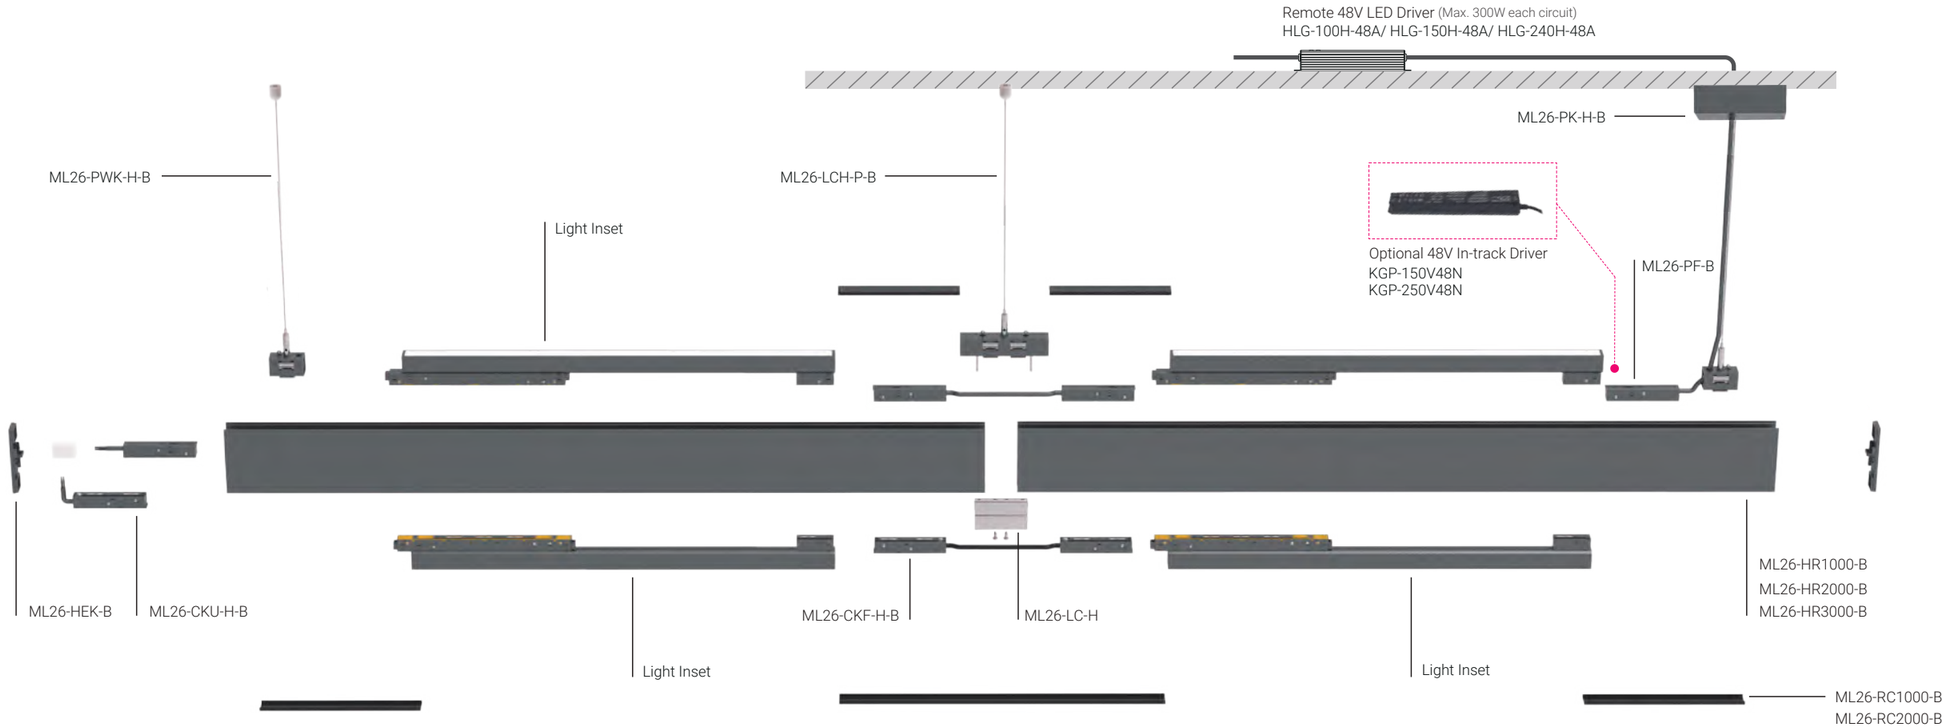


Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W
Linear Connector Kit of H Track System	ML26-LC-H	ML26-LC-H
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

Insets

Spotlight



Pendant Spotlight



Accent Light



General Light



Wall Wash Light




* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System




Slim Track

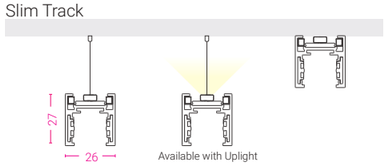


Standard Track

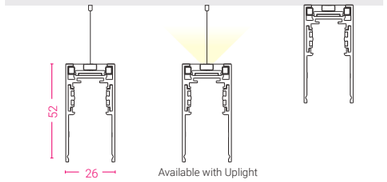


Trim Recessed Track







Trimless Recessed Track-EI




Trimless Recessed Track

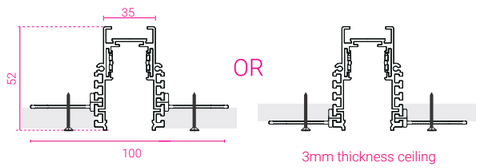


5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings




H Track



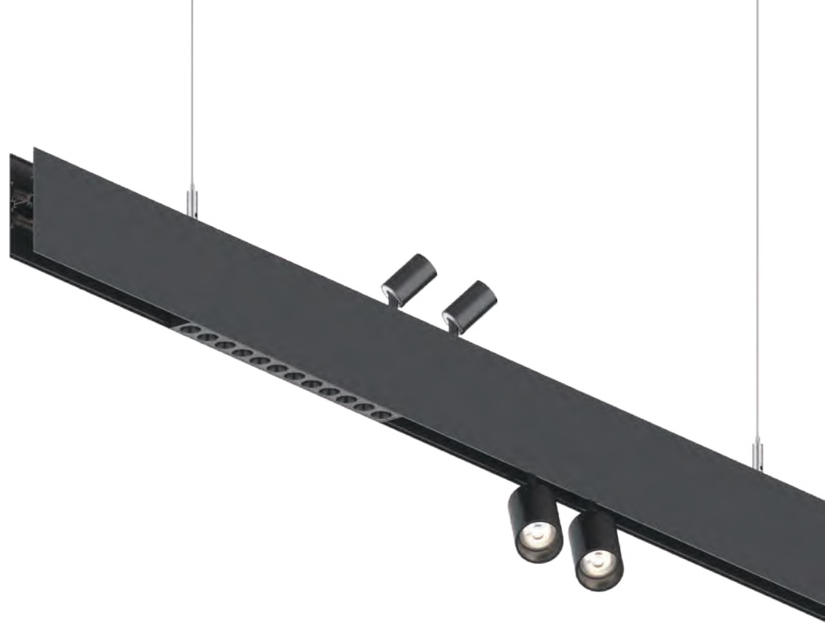

Installations

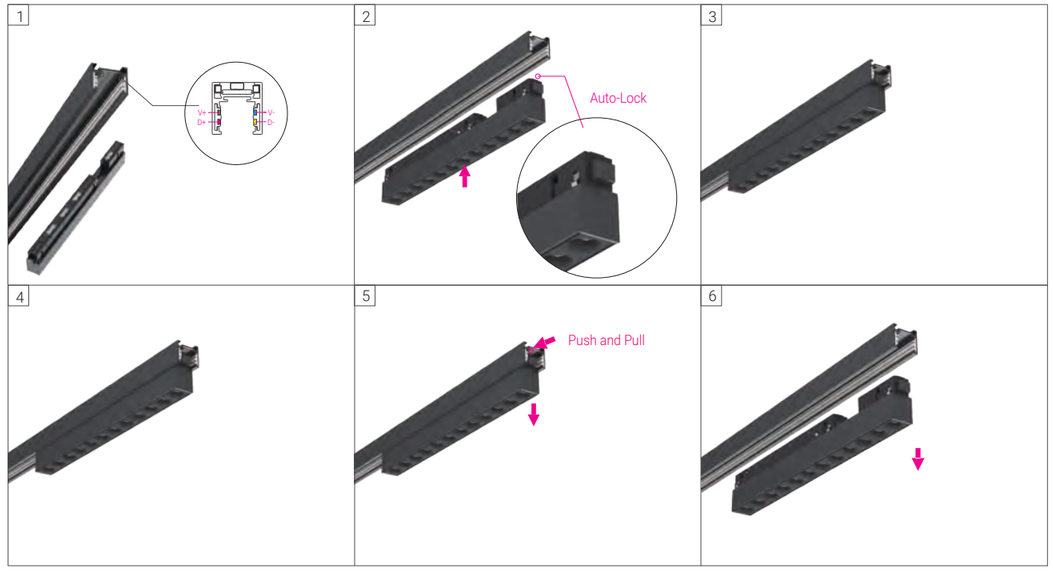

* Tool-free insert mounted by mechanical click-in locking mechanism

MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Track Configuration




1



ML26-FCM-V (Trim)
ML26-TCM-V (Trimless)
ML26-TCM-EI-V (Trimless-EI)

2




ML26-FTC (Trim)
ML26-TTC (Trimless)
ML26-TTC-EI (Trimless-EI)

3




ML26-FXC (Trim)
ML26-TXC (Trimless)
ML26-TXC-EI (Trimless-EI)

4



ML26-FCM (Trim)
ML26-TCM (Trimless)
ML26-TCM-EI (Trimless-EI)

5



ML26-FCM-O (Trim)
ML26-TCM-O (Trimless)
ML26-TCM-EI-O (Trimless-EI)


6



ML26-CKI + ML26-LC

MODULINE 26 – 48V Low Voltage Modular Linear System

Trim Recessed Track System

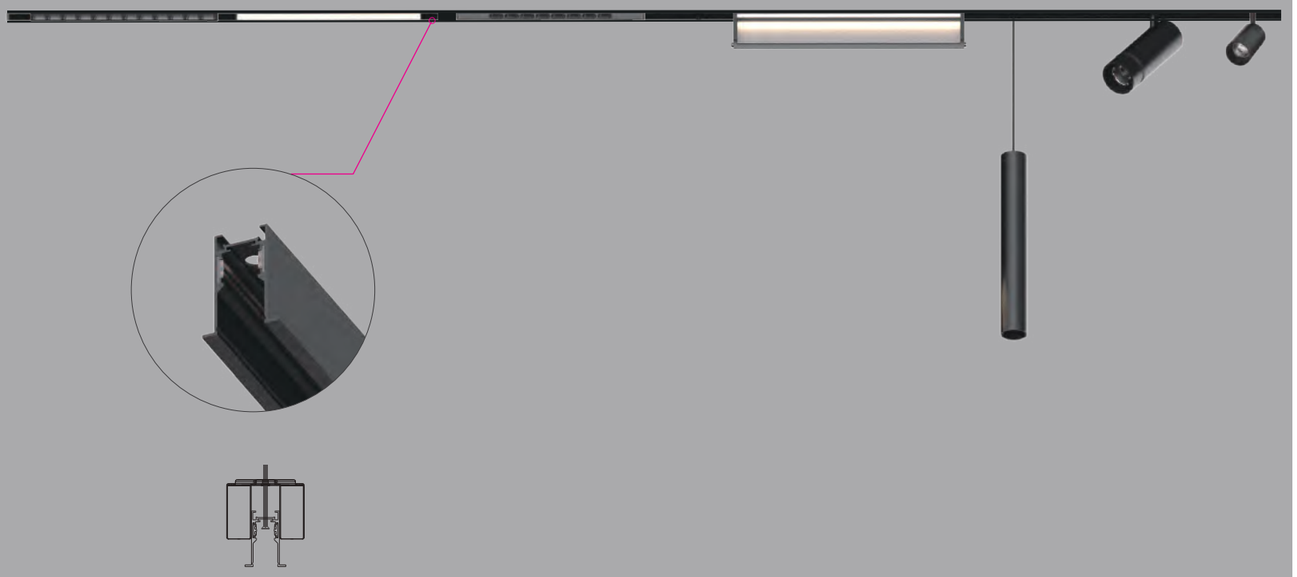

Short Info


·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

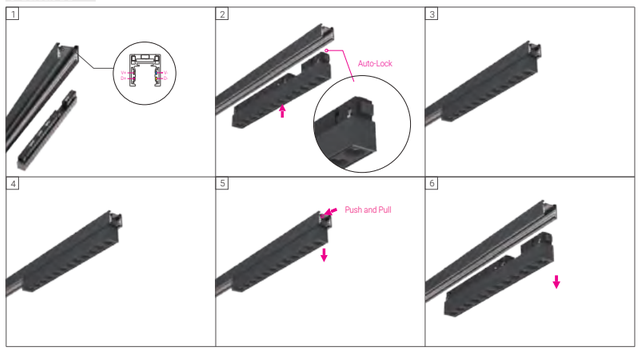

* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info

Moduline 26 Trim Recessed Track System


Electrical

Non Dim
1-10V Dim
DALI Dim

Fixture Colour

Black White(Option)







Moduline 26 Trim Recessed Track System

Please order installation track rail, light insets and mounting accessories separately.

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W


•Track Rail including endcaps.

Accessories of Trim Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W
			Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
			•For Corner Connection.		
			Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK
			Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W
			Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
			Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
			Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
			Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
			•Track Rail Cover can be shortened as desired.		
			Linear Connector with screws	ML26-RLC-B	ML26-RLC-W
			Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W
			•Continuous Kit needs to be used together with Linear Connector as a set.		
			48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
			48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
			48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
			48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
			48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
			48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	
			CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B	

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System
Ceiling Thickness Adjustable Version

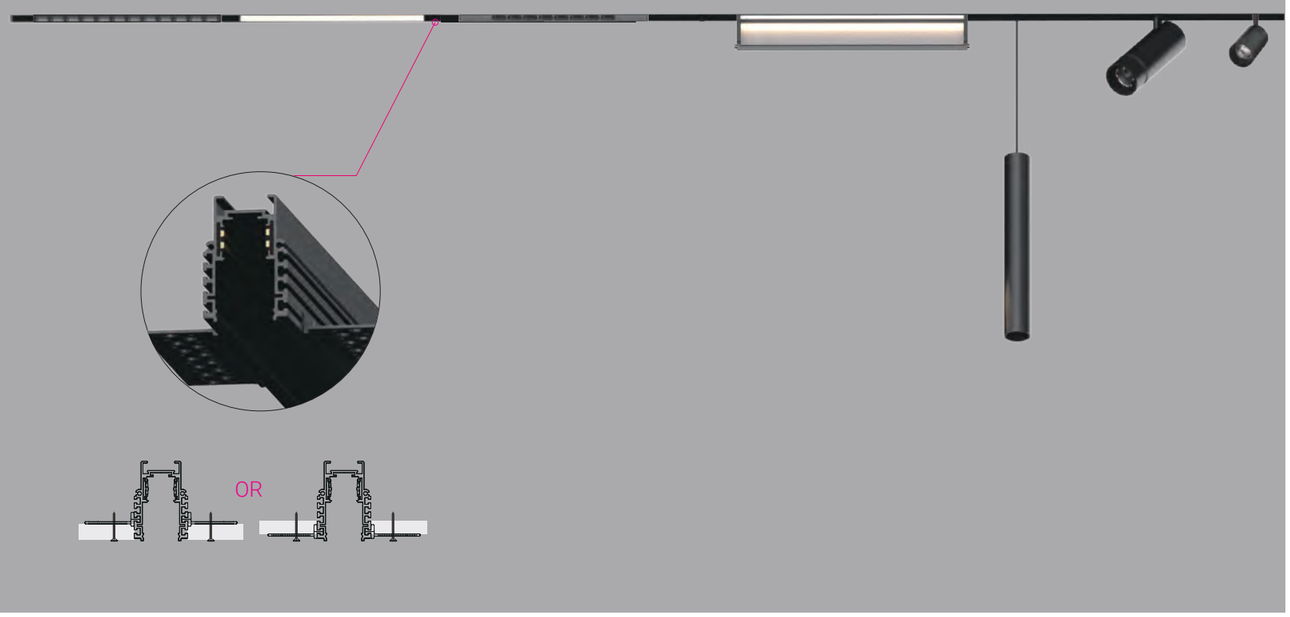

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

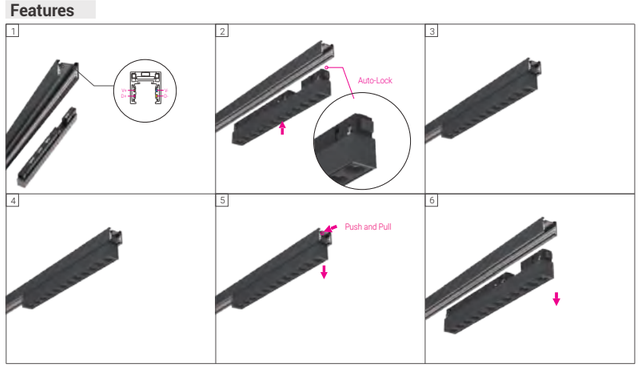


* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Electrical
Non Dim
1-10V Dim
DALI Dim



Fixture Colour
Black White(Option)





Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable


Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W

*Track Rail including endcaps.

Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W
	80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W
	80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W
	80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W
	Flexible Continuous Kit, Electrical			ML26-CKF-C-B	ML26-CKF-C-W

*For Corner Connection.

	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TAEK-B	ML26-TAEK-W
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W

*Track Rail Cover can be shortened as desired.


	Linear Connector with screws	ML26-RLC-B	ML26-RLC-W
	Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W

*Continuous Kit needs to be used together with Linear Connector as a set.

	Trimless Recessed installation kit 1set for 1000mm track	ML26-TAIK	ML26-TAIK
	48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
	48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
	48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	
	CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B	

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI
Easy Installation Version

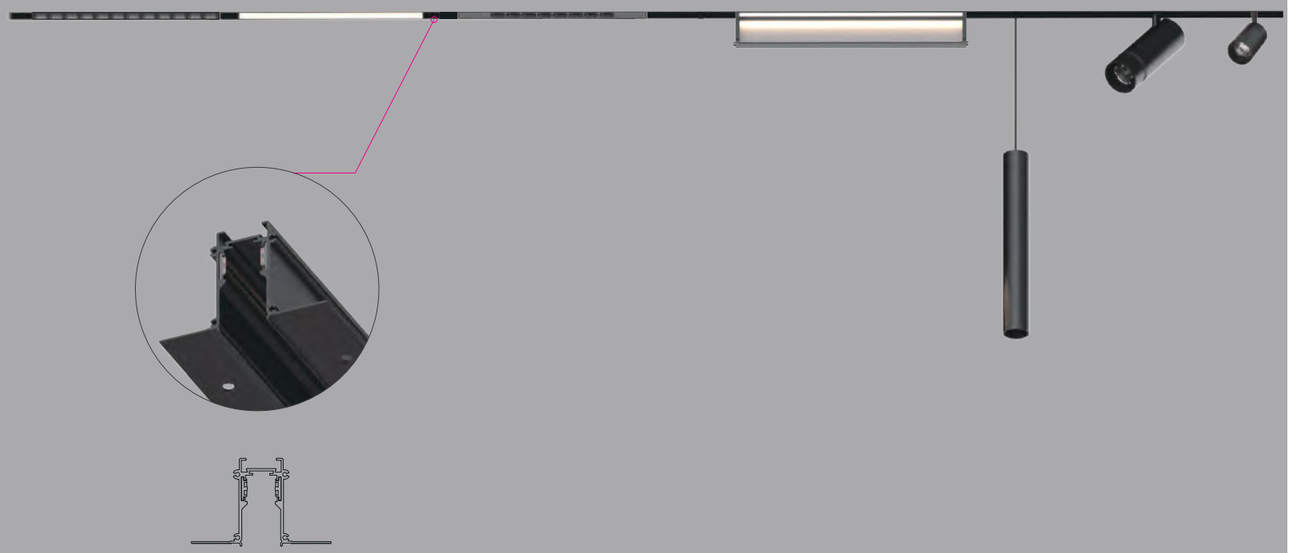

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from surface, suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

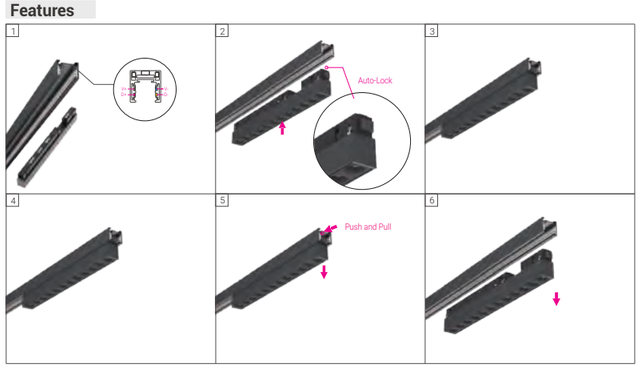

* Tool-free insert mounted by mechanical click-in locking mechanism


Short Info

Moduline 26 Trimless Recessed Track System
Easy Installation Version

Electrical

Non Dim
1-10V Dim
DALI Dim

Fixture Colour
Black White(Option)





Moduline 26 Trimless Recessed Track System
Easy Installation Version




Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W

•Track Rail including endcaps.

Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W
	100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outer	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W
	100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W
	100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W
			Flexible Continuous Kit, Electrical •For Corner Connection.	ML26-CKF-C-B	ML26-CKF-C-W
			Endcap Kit (2pcs/ set) of Trim Recessed Track Power Feeder Unit with feeder cables 500mm	ML26-TEK-EI-B ML26-PF-B	ML26-TEK-EI-W ML26-PF-W
			Track Rail Cover 1000mm Track Rail Cover 2000mm Track Rail Cover 3000mm •Track Rail Cover can be shortened as desired.	ML26-RC1000-B ML26-RC2000-B ML26-RC3000-B	ML26-RC1000-W ML26-RC2000-W ML26-RC3000-W
			Linear Connector with screws StraightContinuousKit •Continuous Kit needs to be used together with Linear Connector as a set.	ML26-RLC-B ML26-CKI-B	ML26-RLC-W ML26-CKI-W
			Trimless Recessed Track mounting kit 1set for 1000mm track	ML26-RMK	ML26-RMK
			48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black 48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black 48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-100V48N KGP-150V48N KGP-250V48N	
			48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver 48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver 48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-100H-48A HLG-150H-48A HLG-240H-48A	
			CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B	

MODULINE 26 – ML26-RS25 Spotlight Inset



ML26-RS25-3W
Single Spot




ML26-RS25-5W
Double Spot


18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- System: 3W, 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim





Light Distribution

3000K

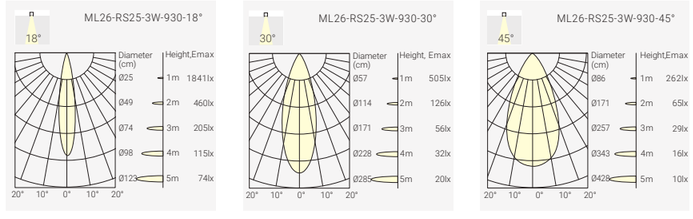

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-RS25 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230lm	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB
4W	5W	48V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR1-9403005F with Honeycomb
MLR1-9403005F-**H**

Coding

MLR0 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLR0 ML26-RS25-3W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**03** 3W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR1 ML26-RS25-5W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**05** 5W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		

MODULINE 26 – ML26-RS40 Spotlight Inset



ML26-RS40-8W
Single Spot




ML26-RS40-16W
Double Spot


18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- System: 8W, 16W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 820lm or 1700lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim





Light Distribution

3000K

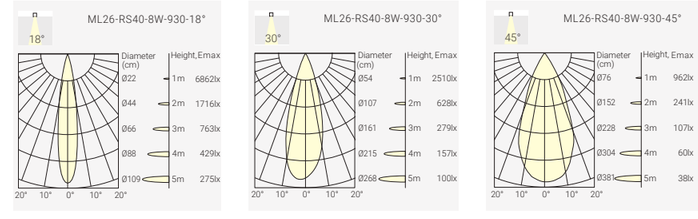

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-RS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48V	90	2700K	18°	1000lm	700lm	MLR2-9271808F-BB
					30°	1000lm	750lm	MLR2-9273008F-BB
					45°	1000lm	500lm	MLR2-9274508F-BB
				3000K	18°	1100lm	730lm	MLR2-9301808F-BB
					30°	1100lm	800lm	MLR2-9303008F-BB
					45°	1100lm	530lm	MLR2-9304508F-BB
				4000K	18°	1200lm	760lm	MLR2-9401808F-BB
					30°	1200lm	820lm	MLR2-9403008F-BB
					45°	1200lm	550lm	MLR2-9404508F-BB
15W	16W	48V	90	2700K	18°	2000lm	1450lm	MLR3-9271816F-BB
					30°	2000lm	1550lm	MLR3-9273016F-BB
					45°	2000lm	1050lm	MLR3-9274516F-BB
				3000K	18°	2200lm	1500lm	MLR3-9301816F-BB
					30°	2200lm	1600lm	MLR3-9303016F-BB
					45°	2200lm	1100lm	MLR3-9304516F-BB
				4000K	18°	2400lm	1550lm	MLR3-9401816F-BB
					30°	2400lm	1700lm	MLR3-9403016F-BB
					45°	2400lm	1150lm	MLR3-9404516F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR3-9403016F with Honeycomb
MLR3-9403016F-**H**

Coding

MLR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLR2 ML26-RS40-8W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR3 ML26-RS40-16W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**16** 16W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		


MODULINE 26 – ML26-RS40 Spotlight Inset




ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot





18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 12W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1050lm or 2300lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim


Light Distribution

3000K


ML26-RS40-12W-930-18°



ML26-RS40-12W-930-30°



ML26-RS40-12W-930-45°



Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

Order Info (ML26-RS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1400lm	970lm	MLR4-9271812F-BB
					30°	1400lm	970lm	MLR4-9273012F-BB
					45°	1400lm	700lm	MLR4-9274512F-BB
				3000K	18°	1500lm	1000lm	MLR4-9301812F-BB
					30°	1500lm	1000lm	MLR4-9303012F-BB
					45°	1500lm	730lm	MLR4-9304512F-BB
				4000K	18°	1600lm	1050lm	MLR4-9401812F-BB
					30°	1600lm	1050lm	MLR4-9403012F-BB
					45°	1600lm	760lm	MLR4-9404512F-BB
22W	24W	48V	90	2700K	18°	2800lm	1900lm	MLR5-9271824F-BB
					30°	2800lm	2150lm	MLR5-9273024F-BB
					45°	2800lm	1350lm	MLR5-9274524F-BB
				3000K	18°	3000lm	2000lm	MLR5-9301824F-BB
					30°	3000lm	2250lm	MLR5-9303024F-BB
					45°	3000lm	1400lm	MLR5-9304524F-BB
				4000K	18°	3200lm	2050lm	MLR5-9401824F-BB
					30°	3200lm	2300lm	MLR5-9403024F-BB
					45°	3200lm	1500lm	MLR5-9404524F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR5-9401824F with Honeycomb
MLR5-9401824F-**H**

Coding

MLR4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLR4 ML26-RS40-12W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**12** 12W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR5 ML26-RS40-24W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**24** 24W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		



MODULINE 26 – ML26-RT55 Spotlight Inset




ML26-RT55-10W
Zooming Spot

20°~40° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°-40°, 35°-60°, Zooming Spot
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

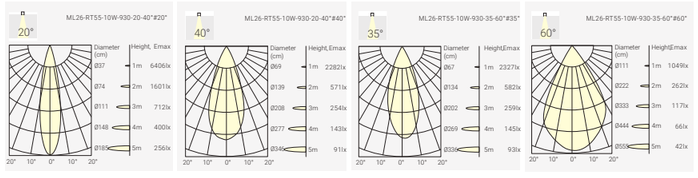

Finish



White Black

Optional accessary



Honeycomb

Code for MLR6-940Z410F with **H**oneycomb
MLR6-940Z410F-**H**

Order Info (ML26-RT55 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	20°-40°	1200lm	950lm	MLR6-927Z410F-BB
					35°-60°	1200lm	850lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1000lm	MLR6-930Z410F-BB
					35°-60°	1300lm	900lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1050lm	MLR6-940Z410F-BB
					35°-60°	1400lm	950lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLR6	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLR6 ML26-RS55-10W		**927** CRI>90/ 2700K	**Z4** 20°~40°	**10** 10W	**F** On-Off		**W** White	**B** Black		
		930 CRI>90/ 3000K	**Z6** 35°~60°		**A** 1-10V Dim		**B** Black			
		940 CRI>90/ 4000K			**D** DALI Dim					

MODULINE 26 – ML26-RS55 Spotlight Inset




ML26-RS55-14W

20° | 30° | 40° | 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

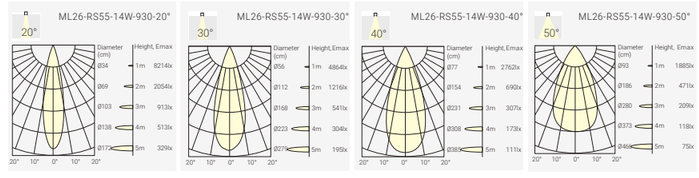

Finish



White Black

Optional accessary



Honeycomb

Code for MLR8-9403014F with **H**oneycomb
MLR8-9403014F-**H**

Order Info (ML26-RS55 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	48V	90	2700K	20°	1700lm	1250lm	MLR8-9272014F-BB
					30°	1700lm	1350lm	MLR8-9273014F-BB
					40°	1700lm	1300lm	MLR8-9274014F-BB
					50°	1700lm	1250lm	MLR8-9275014F-BB
				3000K	20°	1800lm	1300lm	MLR8-9302014F-BB
					30°	1800lm	1400lm	MLR8-9303014F-BB
					40°	1800lm	1350lm	MLR8-9304014F-BB
					50°	1800lm	1300lm	MLR8-9305014F-BB
				4000K	20°	1900lm	1350lm	MLR8-9402014F-BB
					30°	1900lm	1450lm	MLR8-9403014F-BB
					40°	1900lm	1400lm	MLR8-9404014F-BB
					50°	1900lm	1350lm	MLR8-9405014F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

MLR8	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLR8 ML26-RS55-14W Single Spot		**927** CRI>90/ 2700K	**20** 20°	**14** 14W	**F** On-Off		**W** White	**B** Black		**H** Honeycomb
		930 CRI>90/ 3000K	**30** 30°		**A** 1-10V Dim		**B** Black			
		940 CRI>90/ 4000K	**40** 40°		**D** DALI Dim					
			50 50°							

MODULINE 26 – ML26-RS72 Spotlight Inset




ML26-RS72-19W
ML26-RS72-26W

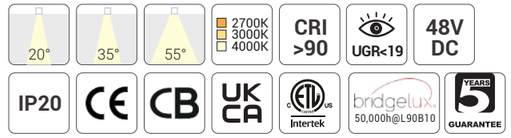


Quick Info

- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2500lm or 3400lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

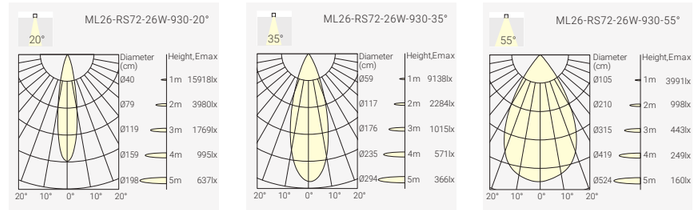

Finish



White Black

Order Info (ML26-RS72 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	20°	2600lm	2300lm	MLR7-9272019F-BB
					35°	2600lm	2300lm	MLR7-9273519F-BB
					55°	2600lm	2300lm	MLR7-9275519F-BB
				3000K	20°	2700lm	2400lm	MLR7-9302019F-BB
					35°	2700lm	2400lm	MLR7-9303519F-BB
					55°	2700lm	2400lm	MLR7-9305519F-BB
				4000K	20°	2800lm	2500lm	MLR7-9402019F-BB
					35°	2800lm	2500lm	MLR7-9403519F-BB
					55°	2800lm	2500lm	MLR7-9405519F-BB
25W	26W	48V	90	2700K	20°	3700lm	3200lm	MLR7-9272026F-BB
					35°	3700lm	3200lm	MLR7-9273526F-BB
					55°	3700lm	3200lm	MLR7-9275526F-BB
				3000K	20°	3800lm	3300lm	MLR7-9302026F-BB
					35°	3800lm	3300lm	MLR7-9303526F-BB
					55°	3800lm	3300lm	MLR7-9305526F-BB
				4000K	20°	3900lm	3400lm	MLR7-9402026F-BB
					35°	3900lm	3400lm	MLR7-9403526F-BB
					55°	3900lm	3400lm	MLR7-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR7-9402026F with Honeycomb
MLR7-9402026F-**H**

Coding

MLR7	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
MLR7 ML26-RS72-19W		**927** CRI>90/ 2700K		**20** 20°		**19** 19W		**F** On-Off		**W** White		**B** Black		
MLR7 ML26-RS72-26W		**930** CRI>90/ 3000K		**35** 35°		**26** 26W		**A** 1-10V Dim		**B** Black				
		940 CRI>90/ 4000K		**55** 55°				**D** DALI Dim						

MODULINE 26 – ML26-RS96 Spotlight Inset




ML26-RS96-9W




Quick Info

- System: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

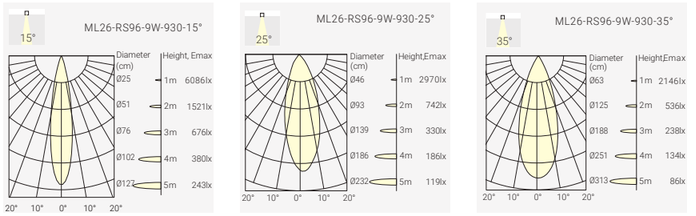

Finish



White Black

Order Info (ML26-RS96 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	15°	1300lm	880lm	MLR9-9271509N-BN
					25°	1300lm	900lm	MLR9-9272509N-BN
					35°	1300lm	900lm	MLR9-9273509N-BN
				3000K	15°	1400lm	900lm	MLR9-9301509N-BN
					25°	1400lm	950lm	MLR9-9302509N-BN
					35°	1400lm	950lm	MLR9-9303509N-BN
				4000K	15°	1500lm	950lm	MLR9-9401509N-BN
					25°	1500lm	1000lm	MLR9-9402509N-BN
					35°	1500lm	1000lm	MLR9-9403509N-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLR9	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
MLR9 ML26-RS96-9W		**927** CRI>90/ 2700K		**15** 15°		**09** 9W		**F** On-Off		**W** White		**N** None		
		930 CRI>90/ 3000K		**25** 25°				**A** 1-10V Dim		**B** Black				
		940 CRI>90/ 4000K		**35** 35°				**D** DALI Dim						

ML26-FRS72 Spotlight Inset



Accessory



Honeycomb

Reflector



Black | White | Dark Light | Specular | Matt

MODULINE 26 – ML26-FRS72 Spotlight Inset




ML26-FRS72-10W
Singble Spot

25° 36° 50° Cut-off 30° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K

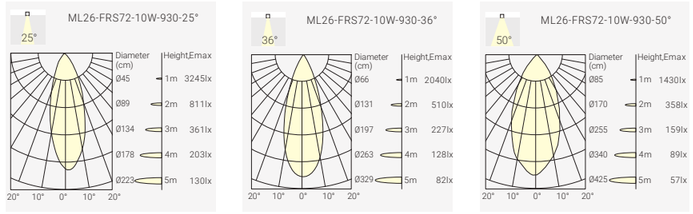

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Hosing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	25°	1200lm	730lm	MLF1-9272510F-BC
					36°	1200lm	900lm	MLF1-9273610F-BC
					50°	1200lm	900lm	MLF1-9275010F-BC
				3000K	25°	1300lm	750lm	MLF1-9302510F-BC
					36°	1300lm	950lm	MLF1-9303610F-BC
					50°	1300lm	950lm	MLF1-9305010F-BC
				4000K	25°	1400lm	800lm	MLF1-9402510F-BC
					36°	1400lm	1000lm	MLF1-9403610F-BC
					50°	1400lm	1000lm	MLF1-9405010F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Optional accessary



Honeycomb

Code for MLF1-9302510F with Honeycomb
MLF1-9302510F-**H**

Coding

MLF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF1 ML26-FRS72-10W Single Spot	**927** CRI>90/ 2700K	**25** 25°	**10** 10W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRS72 Double Spotlight Inset




ML26-FRS72-20W
Double Inset

25° 36° 50° Cut-off 30° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1950lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K

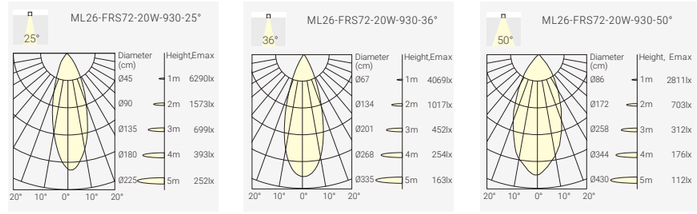

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Hosing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48V	90	2700K	25°	2400lm	1700lm	MLF2-9272520F-BC
					36°	2400lm	1850lm	MLF2-9273620F-BC
					50°	2400lm	1850lm	MLF2-9275020F-BC
				3000K	25°	2600lm	1800lm	MLF2-9302520F-BC
					36°	2600lm	1900lm	MLF2-9303620F-BC
					50°	2600lm	1900lm	MLF2-9305020F-BC
				4000K	25°	2800lm	1850lm	MLF2-9402520F-BC
					36°	2800lm	1950lm	MLF2-9403620F-BC
					50°	2800lm	1950lm	MLF2-9405020F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Optional accessary



Honeycomb

Code for MLF2-9302520F with Honeycomb
MLF2-9302520F-**H**

Coding

MLF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF2 ML26-FRS72-20W Double Spot	**927** CRI>90/ 2700K	**25** 25°	**20** 20W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRD80 Round Downlight Inset




ML26-FRD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FRD80 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1100lm	MLRD-9273010F-BB
				3000K	30°	1300lm	1150lm	MLRD-9303010F-BB
				4000K	30°	1400lm	1200lm	MLRD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLRD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRD ML26-FRD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLRD-9303010F with Honeycomb
MLRD-9303010F-H

MODULINE 26 – ML26-FRDH80 Round Downlight Inset




ML26-FRDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FRDH80 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1100lm	MLRH-9273010F-BB
				3000K	30°	1300lm	1150lm	MLRH-9303010F-BB
				4000K	30°	1400lm	1200lm	MLRH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLRH – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRH ML26-FRH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLRH-9303010F with Honeycomb
MLRH-9303010F-H

MODULINE 26 – ML26-FSD80 Square Downlight Inset




ML26-FSD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSD80 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1150lm	MLSD-9273010F-BB
				3000K	30°	1300lm	1200lm	MLSD-9303010F-BB
				4000K	30°	1400lm	1250lm	MLSD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLSD	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLSD ML26-FSD80-10W		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	30 30°	10 10W	F On-Off A 1-10V Dim D DALI Dim		W White B Black	W White B Black		H Honeycomb

Optional accessory



Honeycomb

Code for MLSD-9303010F-BB with Honeycomb
MLSD-9303010F-BB-H

MODULINE 26 – ML26-FSDH80 Square Downlight Inset




ML26-FSDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSDH80 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1150lm	MLSH-9273010F-BB
				3000K	30°	1300lm	1200lm	MLSH-9303010F-BB
				4000K	30°	1400lm	1250lm	MLSH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLSH	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLSH ML26-FSH80-10W		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	30 30°	10 10W	F On-Off A 1-10V Dim D DALI Dim		W White B Black	W White B Black		H Honeycomb

Optional accessory



Honeycomb

Code for MLSH-9303010F-BB with Honeycomb
MLSH-9303010F-BB-H

MODULINE 26 – ML26-LA240 Slim Accent Light Inset

New



ML26-LA240-13W

35° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

ON-OFF




1-10V Dim, DALI Dim



Light Distribution

3000K

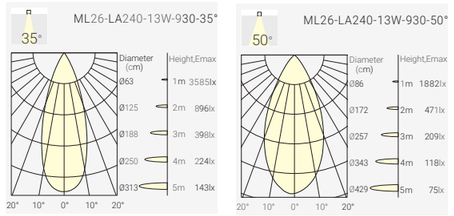

Finish



White-Black



Black-Black

Order Info (ML26-LA240 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	35°	1400lm	1300lm	MLLA-9273513F-BB
					50°	1400lm	1150lm	MLLA-9275013F-BB
				3000K	35°	1500lm	1350lm	MLLA-9303513F-BB
					50°	1500lm	1200lm	MLLA-9305013F-BB
				4000K	35°	1600lm	1450lm	MLLA-9403513F-BB
					50°	1600lm	1300lm	MLLA-9405013F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLLA – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLA ML26-LA240-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	35 35° 50 50°	13 13W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	B Black	

MODULINE 26 – ML26-LA470 Slim Accent Light Inset

New



ML26-LA470-26W

35° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 50°
- Lumen Output: Up to 2800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

ON-OFF




1-10V Dim, DALI Dim



Light Distribution

3000K

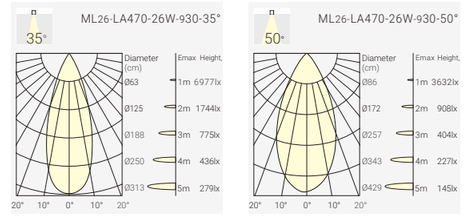

Finish



White-Black



Black-Black

Order Info (ML26-LA470 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	35°	2800lm	2500lm	MLLA-9273526F-BB
					50°	2800lm	2250lm	MLLA-9275026F-BB
				3000K	35°	3000lm	2650lm	MLLA-9303526F-BB
					50°	3000lm	2350lm	MLLA-9305026F-BB
				4000K	35°	3200lm	2800lm	MLLA-9403526F-BB
					50°	3200lm	2500lm	MLLA-9405026F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLLA – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLA ML26-LA470-26W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	35 35° 50 50°	26 26W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	B Black	

MODULINE 26 – ML26-AL190 Accent Light Inset




ML26-AL190-3W ML26-AL190-7W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- System: 3W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

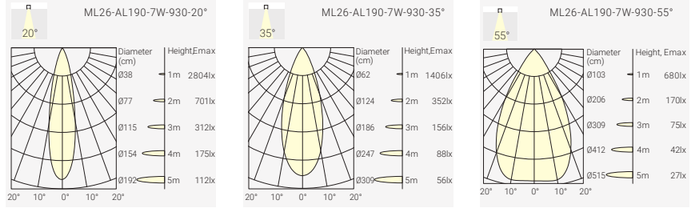

Finish



White Black

Order Info (ML26-AL190 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55°	270lm	190lm	MLA3-9405503F-BB
6W	7W	48V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA3 ____ ____ ____ ____ ____ ____ ____

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA3 ML26-AL190-3W	**927** CRI>90/ 2700K	**20** 20°	**03** 3W	**F** On-Off	**W** White	**B** Black	
MLA4 ML26-AL190-7W	**930** CRI>90/ 3000K	**35** 35°	**07** 7W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**55** 55°		**D** DALI Dim			

MODULINE 26 – ML26-AL280 Accent Light Inset




ML26-AL280-9W ML26-AL280-13W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- System: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

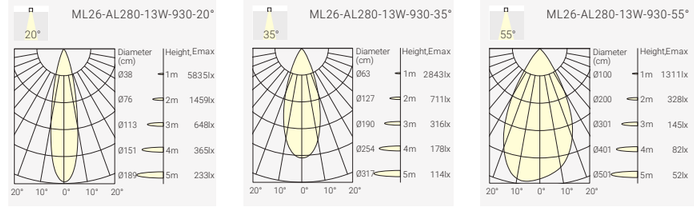

Finish



White Black

Order Info (ML26-AL280 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA1 ML26-AL280-9W	**927** CRI>90/ 2700K	**20** 20°	**09** 9W	**F** On-Off	**W** White	**B** Black	
MLA2 ML26-AL280-13W	**930** CRI>90/ 3000K	**35** 35°	**13** 13W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**55** 55°		**D** DALI Dim			

MODULINE 26 – ML26-AL560 Accent Light Inset




ML26-AL560-26W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UK CA | ETL c us Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL560 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	20°	2800lm	2200lm	MLA6-9272026F-BB
					35°	2800lm	2350lm	MLA6-9273526F-BB
					55°	2800lm	1900lm	MLA6-9275526F-BB
				3000K	20°	3000lm	2300lm	MLA6-9302026F-BB
					35°	3000lm	2450lm	MLA6-9303526F-BB
					55°	3000lm	2000lm	MLA6-9305526F-BB
				4000K	20°	3200lm	2400lm	MLA6-9402026F-BB
					35°	3200lm	2550lm	MLA6-9403526F-BB
					55°	3200lm	2100lm	MLA6-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA6 ML26-AL560-26W	**927** CRI>90/ 2700K	**20** 20°	**26** 26W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**35** 35°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**55** 55°		**D** DALI Dim			



Project: 26-Pakubuwono Residence, Indonesia

MODULINE 26 – ML26-SA280 Adjustable Accent Light Inset




ML26-SA280-13W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White



Black

Order Info (ML26-SA280 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1000lm	MLA5-9302013F-BB
					35°	1500lm	1000lm	MLA5-9303513F-BB
					55°	1500lm	1100lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013F-BB
					35°	1600lm	1200lm	MLA5-9403513F-BB
					55°	1600lm	1100lm	MLA5-9405513F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA5 ML26-SA280-13W Adjustable Accent	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**20** 20° **35** 35° **55** 55°	**13** 13W	**F** On-Off **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	

MODULINE 26 – ML26-SG280 Adjustable General Light Inset




ML26-SG280-7W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-SG280 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLG5 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG5 ML26-SG280-7W General Light	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**A1** 110°	**07** 7W	**F** On-Off **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

MODULINE 26 – ML26-LG470 Slim General Light Inset

New




ML26-LG470-13W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UK CA | ETL c us Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

ON-OFF




1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-LG470 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	110°	1100lm	800lm	MLLG-927A113F-BN
				3000K	110°	1200lm	850lm	MLLG-930A113F-BN
				4000K	110°	1300lm	900lm	MLLG-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLLG – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG470-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	13 13W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

Project: Application reference



MODULINE 26 – ML26-LG700 Slim General Light Inset

New




ML26-LG700-19W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UK CA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 19W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

ON-OFF




1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-LG700 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1200lm	MLLG-927A119F-BN
				3000K	110°	1800lm	1300lm	MLLG-930A119F-BN
				4000K	110°	1900lm	1350lm	MLLG-940A119F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLLG – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG700-19W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-LG925 Slim General Light Inset

New



ML26-LG925-26W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UK CA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

ON-OFF




1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-LG925 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	110°	2200lm	1550lm	MLLG-927A126F-BN
				3000K	110°	2400lm	1600lm	MLLG-930A126F-BN
				4000K	110°	2600lm	1700lm	MLLG-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLLG – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG925-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	26 26W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	


MODULINE 26 – ML26-GL280 & ML26-GL560 General Light Inset



110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm or 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

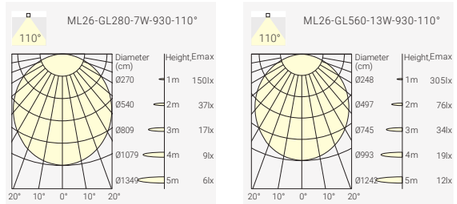

Finish



Order Info (ML26-GL280 & ML26-GL560 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN
12W	13W	48V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG1 ML26-GL280-7W General Light	**927** CRI>90/ 2700K	**A1** 110°	**07** 7W	**F** On-Off	**W** White	**N** None	
MLG2 ML26-GL560-13W General Light	**930** CRI>90/ 3000K		**13** 13W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			


MODULINE 26 – ML26-GL840 & ML26-GL1120 General Light Inset



110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1300lm or 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

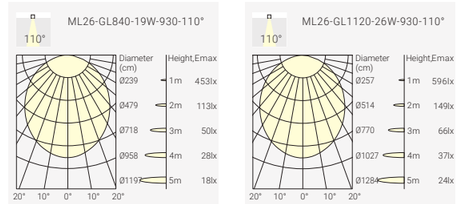

Finish



Order Info (ML26-GL840 & ML26-GL1120 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN
24W	26W	48V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLG3 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG3 ML26-GL840-19W General Light	**927** CRI>90/ 2700K	**A1** 110°	**19** 19W	**F** On-Off	**W** White	**N** None	
MLG4 ML26-GL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			


MODULINE 26 – ML26-CL280 & ML26-CL560 General Light Inset



65° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 420lm or 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



Order Info (ML26-CL280 & ML26-CL560 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	65°	550lm	360lm	MLC1-9276507F-BN
				3000K	65°	600lm	380lm	MLC1-9306507F-BN
				4000K	65°	650lm	420lm	MLC1-9406507F-BN
12W	13W	48V	90	2700K	65°	1100lm	720lm	MLC2-9276513F-BN
				3000K	65°	1200lm	750lm	MLC2-9306513F-BN
				4000K	65°	1300lm	800lm	MLC2-9406513F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLC1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLC1 MLC26-CL280-7W General Light		927 CRI>90/ 2700K	65 65° Microprismatic Cover Version	07 7W	F On-Off		W White	N None		
MLC2 MLC26-CL560-13W General Light		930 CRI>90/ 3000K		13 13W	A 1-10V Dim		B Black			
		940 CRI>90/ 4000K			D DALI Dim					


MODULINE 26 – ML26-CL840 & ML26-CL1120 General Light Inset



65° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 1200lm or 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



Order Info (ML26-CL840 & ML26-CL1120 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	65°	1700lm	1000lm	MLC3-9276519F-BN
				3000K	65°	1800lm	1100lm	MLC3-9306519F-BN
				4000K	65°	1900lm	1200lm	MLC3-9406519F-BN
24W	26W	48V	90	2700K	65°	2200lm	1400lm	MLC4-9276526F-BN
				3000K	65°	2400lm	1500lm	MLC4-9306526F-BN
				4000K	65°	2600lm	1600lm	MLC4-9406526F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLC3	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLC3 MLC26-CL840-19W General Light		927 CRI>90/ 2700K	65 65° Microprismatic Cover Version	19 19W	F On-Off		W White	N None		
MLC4 MLC26-CL1120-26W General Light		930 CRI>90/ 3000K		26 26W	A 1-10V Dim		B Black			
		940 CRI>90/ 4000K			D DALI Dim					

MODULINE 26 – ML26-RB120 & ML26-RB150 Pendant Light Inset




ML26-RB120-5W
ML26-RB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-PB120 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLRB-927C005F-BN
				3000K	300°	550lm	350lm	MLRB-930C005F-BN
				4000K	300°	600lm	400lm	MLRB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLRB-927C007F-BN
				3000K	300°	650lm	550lm	MLRB-930C007F-BN
				4000K	300°	700lm	600lm	MLRB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLRB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRB ML26-RB120-5W Pendant Spot	**927** CRI>90/ 2700K	**C0** 300°	**05** 5W	**F** On-Off	**W** White	**N** None	
MLRB ML26-RB150-7W Pendant Spot	**930** CRI>90/ 3000K		**07** 7W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-PB120 & ML26-PB150 Decorative Ball Inset




ML26-PB120-5W
ML26-PB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-PB120 & ML26-PB150 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLPB-927C005F-BN
				3000K	300°	550lm	350lm	MLPB-930C005F-BN
				4000K	300°	600lm	400lm	MLPB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLPB-927C007F-BN
				3000K	300°	650lm	550lm	MLPB-930C007F-BN
				4000K	300°	700lm	600lm	MLPB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLPB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLPB ML26-PB120-5W	**927** CRI>90/ 2700K	**C0** 300°	**05** 5W	**F** On-Off	**W** White	**N** None	
MLPB ML26-PB150-7W	**930** CRI>90/ 3000K		**07** 7W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-PS40 Pendant Spot Inset




ML26-PS40-12W

18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UK CA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

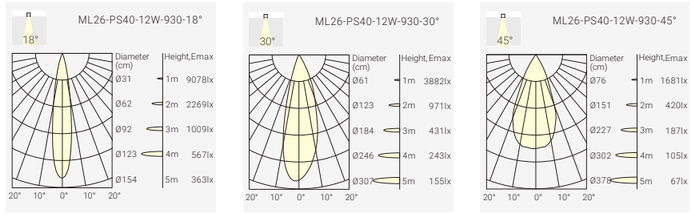

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1400lm	1000lm	MLP1-9271812F-BB
					30°	1400lm	1200lm	MLP1-9273012F-BB
					45°	1400lm	750lm	MLP1-9274512F-BB
				3000K	18°	1500lm	1050lm	MLP1-9301812F-BB
					30°	1500lm	1250lm	MLP1-9303012F-BB
					45°	1500lm	770lm	MLP1-9304512F-BB
				4000K	18°	1600lm	1100lm	MLP1-9401812F-BB
					30°	1600lm	1300lm	MLP1-9403012F-BB
					45°	1600lm	800lm	MLP1-9404512F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLP1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP1 ML26-PS40-12W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**12** 12W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		

Optional accessory



Code for MLP1-9301812F with Honeycomb
MLP1-9301812F-**H**

Honeycomb

MODULINE 26 – ML26-PS55 Pendant Spot Inset




ML26-PS55-10W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UK CA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

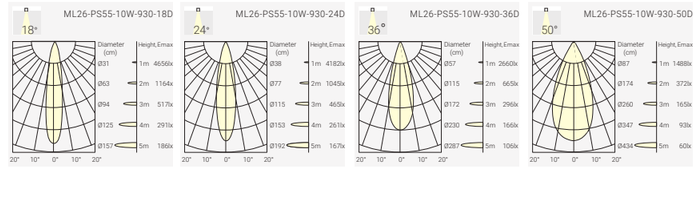

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS55 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	18°	1200lm	700lm	MLP4-9271810F-BB
					24°	1200lm	800lm	MLP4-9272410F-BB
					36°	1200lm	800lm	MLP4-9273610F-BB
					50°	1200lm	850lm	MLP4-9275010F-BB
				3000K	18°	1300lm	750lm	MLP4-9301810F-BB
					24°	1300lm	830lm	MLP4-9302410F-BB
					36°	1300lm	830lm	MLP4-9303610F-BB
					50°	1300lm	900lm	MLP4-9305010F-BB
				4000K	18°	1400lm	780lm	MLP4-9401810F-BB
					24°	1400lm	850lm	MLP4-9402410F-BB
					36°	1400lm	850lm	MLP4-9403610F-BB
					50°	1400lm	950lm	MLP4-9405010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLP4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP4 ML26-PS40-10W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**10** 10W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
		50 50°			**G** Brushed Gold		

Optional accessory



Code for MLP4-9301810F with Honeycomb
MLP4-9301810F-**H**

Honeycomb

MODULINE 26 – ML26-PS60 Pendant Light Inset




ML26-PS60-5W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 610lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

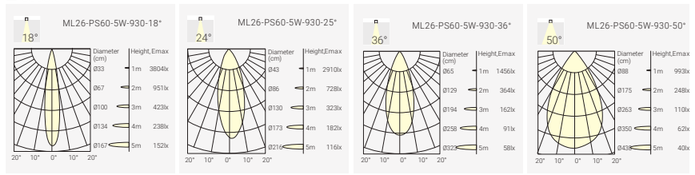

Finish



White Black

Order Info (ML26-PS60 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48V	90	2700K	18°	700lm	530lm	MLP3-9271805F-BB
					24°	700lm	550lm	MLP3-9272405F-BB
					36°	700lm	550lm	MLP3-9273605F-BB
					50°	700lm	570lm	MLP3-9275005F-BB
				3000K	18°	750lm	550lm	MLP3-9301805F-BB
					24°	750lm	580lm	MLP3-9302405F-BB
					36°	750lm	580lm	MLP3-9303605F-BB
					50°	750lm	600lm	MLP3-9305005F-BB
				4000K	18°	800lm	570lm	MLP3-9401805F-BB
					24°	800lm	600lm	MLP3-9402405F-BB
					36°	800lm	600lm	MLP3-9403605F-BB
					50°	800lm	610lm	MLP3-9405005F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLP3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP3 ML26-PS60-5W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**05** 5W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**D** DALI Dim			
		50 50°					



MODULINE 26 – ML26-WW280 & ML26-WW560 Wall Washer Inset



ML26-WW280-7W




ML26-WW560-13W

Wall Washer | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 450lm or 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White



Black

Order Info (ML26-WW280 & WW560 in Black Hosing & Matt Reflector as an Example)


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	WW	550lm	330lm	MLW1-927WW07F-BM
				3000K	WW	600lm	350lm	MLW1-930WW07F-BM
				4000K	WW	650lm	450lm	MLW1-940WW07F-BM
12W	13W	48V	90	2700K	WW	1100lm	670lm	MLW2-927WW13F-BM
				3000K	WW	1200lm	700lm	MLW2-930WW13F-BM
				4000K	WW	1300lm	750lm	MLW2-940WW13F-BM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLW1 ML26-WW280-7W	**927** CRI>90/ 2700K	**WW** Wall Washer	**07** 7W	**F** On-Off	**W** White	**M** Matt	
MLW2 ML26-WW560-13W	**930** CRI>90/ 3000K		**13** 13W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

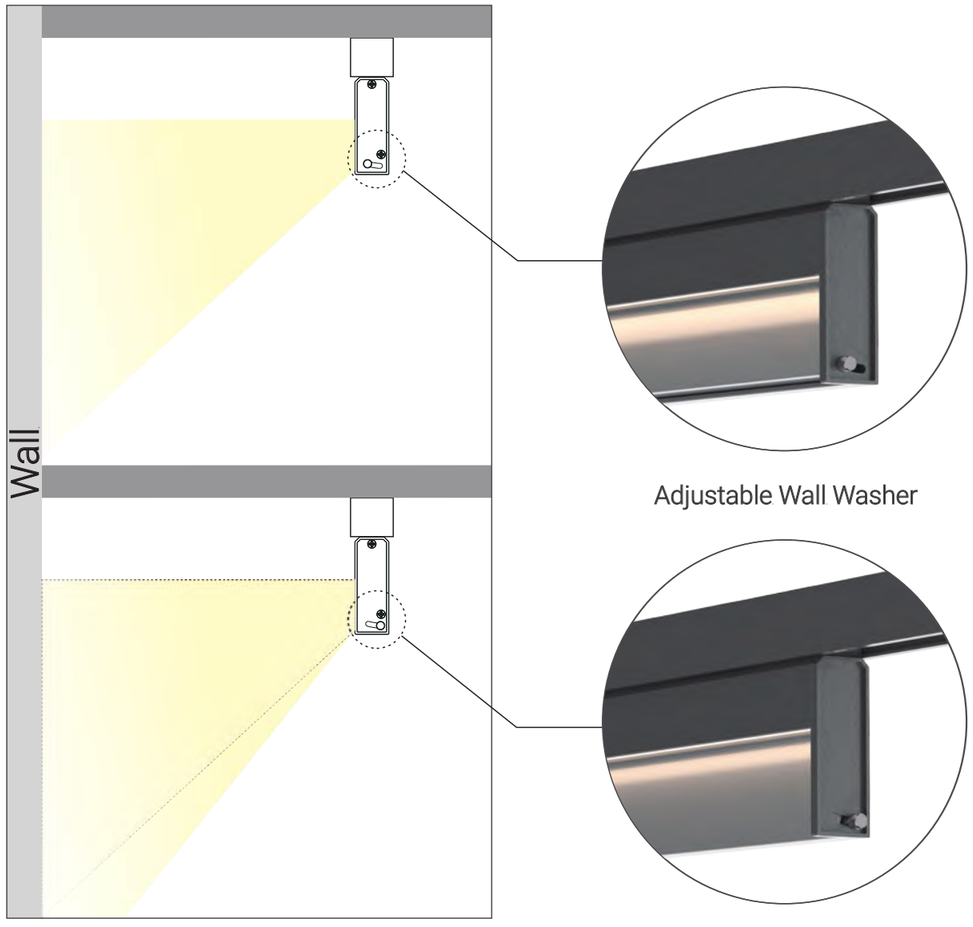

Adjustable Wall Washer

MODULINE 26 – ML26-NHU12 Neon Strip Inset




ML26-NHU12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Availabl as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHU12 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1300lm	MNHU-930C619F-BN
				4000K	360°	2400lm	1400lm	MNHU-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU12-19W Neon Strip	**930** CRI>90/ 3000K **940** CRI>90/ 4000K	**C6** 360°	**19** 19W	**F** On-Off **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	



MODULINE 26 – ML26-NHP10 Neon Strip Inset




ML26-NHP10-14W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL c us Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHP10 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48V	90	3000K	360°	1600lm	1000lm	MNHP-930C614F-BN
				4000K	360°	1700lm	1050lm	MNHP-940C614F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU10-14W Neon Strip	**930** CRI>90/ 3000K **940** CRI>90/ 4000K	**C6** 360°	**19** 19W	**F** On-Off **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

MODULINE 26 – ML26-NVP12 Neon Strip Inset




ML26-NVP12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL c us Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-NVP12 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1050lm	MNVP-930C619F-BN
				4000K	360°	2400lm	1100lm	MNVP-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MNVP – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNVP ML26-NVP12-19W Neon Strip	**930** CRI>90/ 3000K **940** CRI>90/ 4000K	**C6** 360°	**19** 19W	**F** On-Off **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

PEARL series

Accent and ambient lighting in one
Multiple installation options for design flexibility
Choice of reflector colors for enhanced visual comfort
36° beam angle available for focused lighting
CCT options: 2700K, 3000K, 4000K
IP54 rated – best for semi-outdoor or damp spaces



New

*IP54 version available

Semi - recessed

Surface mounted

Pendant

Housing color

Length adjustable

Ambient light

Circular ambient light surface

Dual Lighting

Opal diffuser for uniform light

Opal diffuser

Reflector color

Φ100mm

Accent light

2700K / 3000K / 4000K

36°

Optional honeycomb for glare control

Honeycomb

PEARL – Decorative Semi-recessed Downlight


New






Quick Info


- Ceiling Cut-out: Ø75mm for semi-recessed version
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim





Light Distribution

3000K

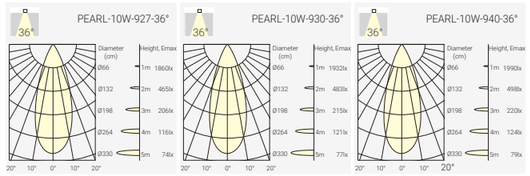

Base Finsh



White Black

Order Info (PEARL Semi-recessed Downlight)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAR1-9273610F-WW
					3000K	36°	1160lm	870lm	PAR1-9303610F-WW
					4000K	36°	1200lm	900lm	PAR1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-WG
					3000K	36°	1160lm	870lm	PAR1-9303610F-WG
					4000K	36°	1200lm	900lm	PAR1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-BB
					3000K	36°	1160lm	870lm	PAR1-9303610F-BB
					4000K	36°	1200lm	900lm	PAR1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-BG
					3000K	36°	1160lm	870lm	PAR1-9303610F-BG
					4000K	36°	1200lm	900lm	PAR1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System Power	Control	Base Finsh	Reflector Color	Accessory
PAR1 PEARL Semi-recessed-10W	**927** CRI90/ 2700K	**36°** 36°	**10W** 10W	**F** On-Off	**W** White	**W** White	
	930 CRI90/ 3000K			**P** Phase Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K			**D** DALI Dim		**G** Gold	



PEARL– Decorative Ceiling Light


New



36° | 2700K 3000K 4000K | CRI >90 | CE | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Light
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

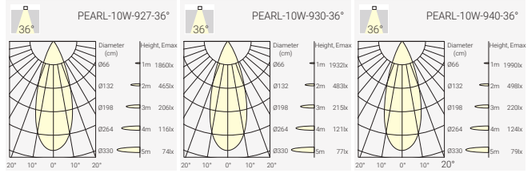

Base Finsh



White Black

Order Info (PEARL Ceiling Light)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAC1-9273610F-WW
					3000K	36°	1160lm	870lm	PAC1-9303610F-WW
					4000K	36°	1200lm	900lm	PAC1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-WG
					3000K	36°	1160lm	870lm	PAC1-9303610F-WG
					4000K	36°	1200lm	900lm	PAC1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-BB
					3000K	36°	1160lm	870lm	PAC1-9303610F-BB
					4000K	36°	1200lm	900lm	PAC1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-BG
					3000K	36°	1160lm	870lm	PAC1-9303610F-BG
					4000K	36°	1200lm	900lm	PAC1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAC1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System Power	Control	Base Finsh	Reflector Color	Accessory
PAC1 PEARL Ceiling-10W	**927** CRI90/ 2700K	**36°** 36°	**10W** 10W	**F** On-Off	**W** White	**W** White	
	930 CRI90/ 3000K			**P** Phase Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K			**D** DALI Dim		**G** Gold	

PEARL– Decorative Pendant Light


New



36° | 2700K 3000K 4000K | CRI >90 | CE | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Pendant Wire Light
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

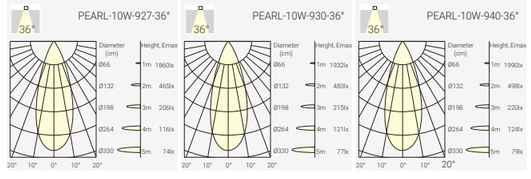

Base Finsh



White Black

Order Info (PEARL Pendant Light)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAW1-9273610F-WW
					3000K	36°	1160lm	870lm	PAW1-9303610F-WW
					4000K	36°	1200lm	900lm	PAW1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-WG
					3000K	36°	1160lm	870lm	PAW1-9303610F-WG
					4000K	36°	1200lm	900lm	PAW1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-BB
					3000K	36°	1160lm	870lm	PAW1-9303610F-BB
					4000K	36°	1200lm	900lm	PAW1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-BG
					3000K	36°	1160lm	870lm	PAW1-9303610F-BG
					4000K	36°	1200lm	900lm	PAW1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System Power	Control	Base Finsh	Reflector Color	Accessory
PAW1 PEARL Pendant -10W	**927** CRI90/ 2700K	**36°** 36°	**10W** 10W	**F** On-Off	**W** White	**W** White	
	930 CRI90/ 3000K			**P** Phase Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K			**D** DALI Dim		**G** Gold	

MOVE

Stepless Pendant Height Adjustment from 0-1700mm


Chrome Black with Champagne Gold Accents




Project: Application reference

MOVE – Pendant Light

New

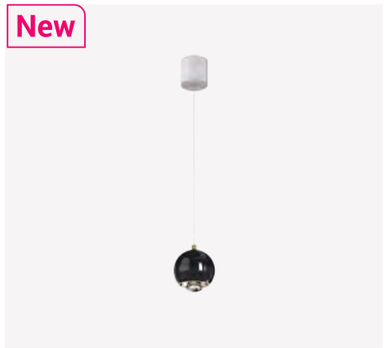




90°
3000K
CRI >90
IP20
CE
LUMINUS 50,000h@L80B10
5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LUMINUS LED: 5W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 480lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

3000K



Finish



Chrome Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
5W	6W	36V	150mA	90	3000K	90°	480lm	MOVE-9309006F-CB MOVE-9309006P-CB MOVE-9309006D-CB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

MOVE	–	**	**	**	*	–	**	–	
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
MOVE MOVE		**930** CRI90/ 3000K	**90** 90°	**06** 6W	**F** On-Off **P** Phase Dim **D** DALI Dim		**CB** Chrome Black		



Project: Application reference

SPACE 07

7mm Ultra-Slim Light-Emitting Surface

Upward and Downward Illumination

80° Diffused Beam for Direct Lighting

Stepless Pendant Height Adjustment from 0-1700mm

Electroplated Finish in Sleek Metal Tones

Decorative Design Meets Functional Efficiency



SPACE 07 – Decorative Pendant Linear Light


New



110° □ 80° | 3000K | CRI >90 | IP20 | CE | SMD 2835 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- SMD 2835 LED: 38W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 80° ↓ , 110° ↑
- Lumen Output: Up to 2450lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

□ 3000K



Finish



Brushed Bronze(BR)



Brushed Nickel(BN)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
38W	40W	36V	1050mA	90	3000K	80° ↓ 110° ↑	2450lm	S07A-9308040F-BR-U S07A-9308040F-BN-U S07A-9308040P-BR-U S07A-9308040P-BN-U S07A-9308040D-BR-U S07A-9308040D-BN-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

S07A – ** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
S07A SPACE 07	**930** CRI90/ 3000K	**80** 80° ↓ **80** 80° ↓ 110° ↑	**40** 40W	**F** On-Off **P** Phase Dim **D** DALI Dim	**BR** Brushed Bronze **BN** Brushed Nickel	**U** Uplight



Project: Application reference

SPACE 16 RING

Upward and Downward in One Elegant Form

Stepless Pendant Height Adjustment from 0-1700mm

Refined Electroplated Metallic Finish Options

Elegant Design, Functional Lighting Solution

UGR<19, Glare-Free with Visual Comfort




SPACE 16 RING – Upward and Downward in One Elegant Form

New

Stepless Pendant Height Adjustment
from 0-1700mm




Uplight - Soft Ambient Glow
Beam Angle: 110°

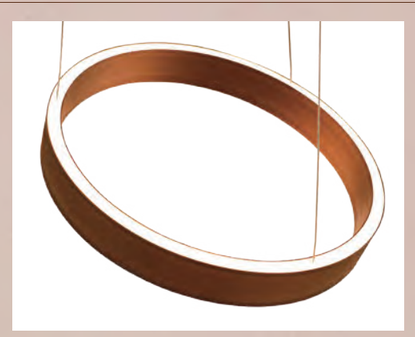




Downlight - Precision Accent Lighting
Beam Angle: 36°

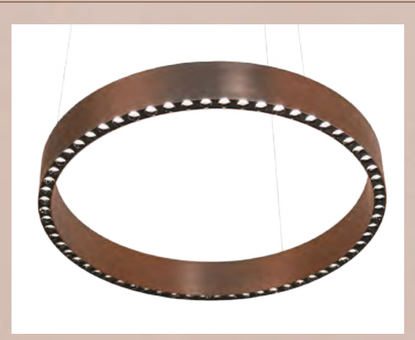



SPACE 16 RING – Decorative Pendant Light


New

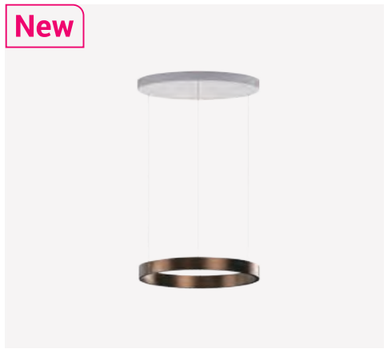

110° □ 36° | 3000K | CRI >90 | IP20 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 28W, 43W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 36° ↓, 110° ↑
- Lumen Output: Up to 2700lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Brushed Bronze(BR) | Brushed Nickel(BN) | Chrome Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36° ↓ 110° ↑	1900lm	S16A-9303630F-BR-U S16A-9303630F-BN-U S16A-9303630F-CB-U S16A-9303630P-BR-U S16A-9303630P-BN-U S16A-9303630P-CB-U S16A-9303630D-BR-U S16A-9303630D-BN-U S16A-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36° ↓ 110° ↑	2700lm	S16C-9303646F-BR-U S16C-9303646F-BN-U S16C-9303646F-CB-U S16C-9303646P-BR-U S16C-9303646P-BN-U S16C-9303646P-CB-U S16C-9303646D-BR-U S16C-9303646D-BN-U S16C-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding


S16A – *** ** ** * – ** – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
S16A SPACE 16 RING-400-30W	**930** CRI90/ 3000K	**36** 36° ↓	**30** 30W	**F** On-Off	**BR** Brushed Bronze	**U** Uplight
S16C SPACE 16 RING-600-46W		**36** 36° ↓ 110° ↑	**46** 46W	**P** Phase Dim	**BN** Brushed Nickel	
				D DALI Dim	**CB** Chrome Black	

Project: Application reference



Simply Lift or Pull Down the Luminaire to Achieve Your Desired Height

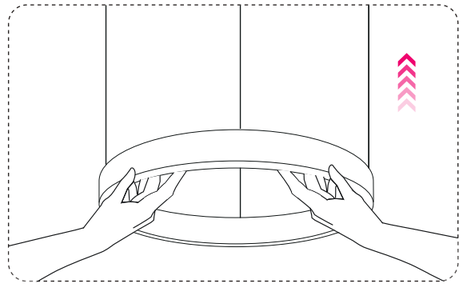

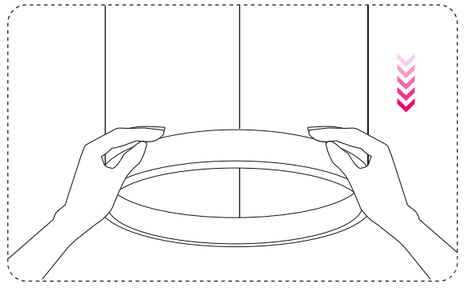

SPACE 16 RING Semi-recessed – Decorative Pendant Light


New



110° 36° | 3000K | CRI >90 | IP20 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 28W, 43W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 36° ↓ , 110° ↑
- Lumen Output: Up to 2700lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Brushed Bronze(BR) | Brushed Nickel(BN) | Chrome Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36° ↓ 110° ↑	1900lm	S16E-9303630F-BR-U S16E-9303630F-BN-U S16E-9303630F-CB-U S16E-9303630P-BR-U S16E-9303630P-BN-U S16E-9303630P-CB-U S16E-9303630D-BR-U S16E-9303630D-BN-U S16E-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36° ↓ 110° ↑	2700lm	S16G-9303646F-BR-U S16G-9303646F-BN-U S16G-9303646F-CB-U S16G-9303646P-BR-U S16G-9303646P-BN-U S16G-9303646P-CB-U S16G-9303646D-BR-U S16G-9303646D-BN-U S16G-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

S16E – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
S16E SPACE 16 RING-400-Semi-recessed-30W **S16G** SPACE 16 RING-600-Semi-recessed-46W	**930** CRI90/ 3000K	**36** 36° ↓ **36** 36° ↓ 110° ↑	**30** 30W **46** 46W	**F** On-Off **P** Phase Dim **D** DALI Dim	**BR** Brushed Bronze **BN** Brushed Nickel **CB** Chrome Black	**U** Uplight

Project: Application reference

GAME & SUGAR

High-efficiency modern ceiling light series.
GAME: A classic flat design, available in white or black finish.
SUGAR: A decorative recessed frame design,
offered in white-gold or black-gold finish.
- Both features a premium microprismatic cover that provides uniform illumination and exceptional visual comfort (UGR<19).
- Available in four diameters: Ø350, Ø450, Ø600, and Ø900.
- Can be surface-mounted to the ceiling or suspended with wire or rod.
- An optional indirect light module is also available.
- Color temperatures choose from 3000K, 4000K, or Tunable White.
- Delivers up to 140 lm/W luminous efficacy.
- Perfect for offices, meeting rooms, classrooms, retail spaces, and more.



Project: Aurum University in Turku, Finland

GAME

SUGAR

Microprismatic Cover
UGR<19
Up to 140lm/w



GAME & SUGAR – Ceiling Light System



Magnetic Up light Module



UP LIGHT





8W Up Light(250mA) 950lm
12W Down Light(350mA) 1800lm
16W Down Light(500mA) 2350lm
ON-OFF/Phase Dim/1-10V/DALI Dim







11W Up Light(350mA) 1200lm
16W Down Light(500mA) 2500lm
24W Down Light(700mA) 3400lm
ON-OFF/Phase Dim/1-10V/DALI Dim





18W Up Light(500mA) 1800lm
24W Down Light(700mA) 3300lm
36W Down Light(1050mA) 5300lm
46W Down Light(1400mA) 6700lm
ON-OFF/Phase Dim/1-10V/DALI Dim





25W Up Light(700mA) 2700lm
65W Down Light(1400mA) 8700lm
ON-OFF/1-10V/DALI Dim






GAME

D1:GAME 350: D1=Ø350mm
GAME 450: D1=Ø450mm
GAME 600: D1=Ø600mm
GAME 900: D1=Ø900mm

D2:GAME 350/ 450: D2=Ø235mm
GAME 600/ 900: D2=Ø350mm

D3:Ø136mm

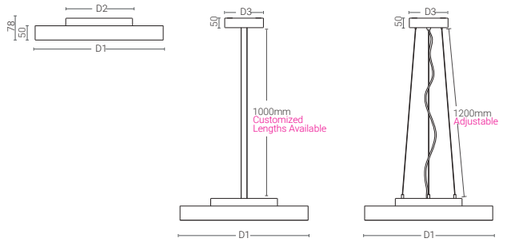


SUGAR

D1:SUGAR 350: D1=Ø350mm
SUGAR 450: D1=Ø450mm
SUGAR 600: D1=Ø600mm
SUGAR 900: D1=Ø900mm

D2: SUGAR 350/ 450: D2=Ø235mm
SUGAR 600/ 900: D2=Ø350mm

D3:Ø136mm

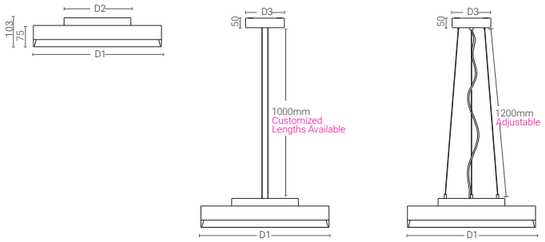

GAME – Ceiling Light System

Project: Skyline Hill, Germany

Project: EWO Administration Building, German





Project: Kindergarten Oftringen, Switzerland


GAME 350 – Ceiling Light System






Quick Info


- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Standard pendant rod length: 1000mm
* Field cuttable pendant rod solution optional



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G3PR-8309012N-WN with Uplight Module G3PR-8309012N-WN-U

Magnetic Uplight Module 350

Order Info (Surface/ Wall Mounted GAME 350 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	G3SM-8279012N-BN
					3000K	90°	2100lm	1700lm	G3SM-8309012N-BN
					4000K	90°	2300lm	1800lm	G3SM-8409012N-BN
					2700K-6500K	90°	Max.2100lm	Max.1750lm	G3SM-8T29012N-BN
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	G3SM-8279016N-BN
					3000K	90°	2700lm	2150lm	G3SM-8309016N-BN
					4000K	90°	2900lm	2350lm	G3SM-8409016N-BN
Uplight Module					2700K-6500K	90°	Max.2900lm	Max.2500lm	G3SM-8T29012N-BN
8W	10W	33V	250mA	80	2700K	110°	1300lm	1150lm	UM35-827A108N-NN
					3000K	110°	1400lm	1200lm	UM35-830A108N-NN
					4000K	110°	1500lm	1250lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G3SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G3SM GAME 350 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**12** 12W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G3PW GAME 350 Pendant Wires		**830** CRI80/ 3000K				**16** 16W		**F** On-Off		**B** Black				
G3PR GAME 350 Pendant Rod		**840** CRI80/ 4000K						**P** Phase Dim						
		8T2 CRI80 2700K-6500K Tunable White						**A** 1-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												
		9T2 CRI90 2700K-6500K Tunable White												


GAME 450 – Ceiling Light System






Quick Info


- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution


3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G4PR-8309016N-WN with Uplight Module G4PR-8309016N-WN-U

Magnetic Uplight Module 450

Order Info (Surface/ Wall Mounted GAME 450 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	G4SM-8279016N-BN
					3000K	90°	2600lm	2300lm	G4SM-8309016N-BN
					4000K	90°	2800lm	2500lm	G4SM-8409016N-BN
					2700K-6500K	90°	Max.2900lm	Max.2300lm	G4SM-8T09016N-BN
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	G4SM-8279024N-BN
					3000K	90°	3700lm	3150lm	G4SM-8309024N-BN
					4000K	90°	4000lm	3400lm	G4SM-8409024N-BN
Uplight Module					2700K-6500K	90°	Max.4100lm	Max.3200lm	G4SM-8T29024N-BN
11W	13W	33V	350mA	80	2700K	110°	1700lm	1500lm	UM45-827A111N-NN
					3000K	110°	1850lm	1600lm	UM45-830A111N-NN
					4000K	110°	2000lm	1800lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G4SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G4SM GAME 450 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**16** 16W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G4PW GAME 450 Pendant Wires		**830** CRI80/ 3000K				**24** 24W		**F** On-Off		**B** Black				
G4PR GAME 450 Pendant Rod		**840** CRI80/ 4000K						**P** Phase Dim						
		8T2 CRI80 2700K-6500K Tunable White						**A** 1-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												
		9T2 CRI90 2700K-6500K Tunable White												


GAME 600 – Ceiling Light System



90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info


- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G6PR-8309036N-WN with Uplight Module
G6PR-8309036N-WN-U

Magnetic Uplight Module 600

Order Info (Surface/ Wall Mounted GAME 600 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	G6SM-8279024N-BN
					3000K	90°	3700lm	3000lm	G6SM-8309024N-BN
					4000K	90°	4000lm	3300lm	G6SM-8409024N-BN
					2700K-6500K	90°	Max.4100lm	Max.3400lm	G6SM-8T29024N-BN
36W	38W	34V	1050mA	80	2700K	90°	5800lm	4750lm	G6SM-8279036N-BN
					3000K	90°	6200lm	5000lm	G6SM-8309036N-BN
					4000K	90°	6600lm	5300lm	G6SM-8409036N-BN
					2700K-6500K	90°	Max.6600lm	Max.5700lm	G6SM-8T29036N-BN
46W	48W	34V	1400mA	80	2700K	90°	7200lm	5850lm	G6SM-8279046N-NN
					3000K	90°	8100lm	6150lm	G6SM-8309046N-NN
					4000K	90°	8600lm	6700lm	G6SM-8409046N-NN
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	2700lm	2200lm	UM60-827A118N-NN
					3000K	110°	2850lm	2400lm	UM60-830A118N-NN
					4000K	110°	3000lm	2600lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G6SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G6SM GAME 600 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**24** 24W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G6PW GAME 600 Pendant Wires		**830** CRI80/ 3000K				**36** 36W		**F** On-Off		**B** Black				
G6PR GAME 600 Pendant Rod		**840** CRI80/ 4000K				**46** 46W *		**P** Phase Dim						
		8T2 CRI80 2700K-6500K Tunable White						**A** 1-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												
		9T2 CRI90 2700K-6500K Tunable White												

* LED 46W is not available with Tunable White


GAME 900 – Ceiling Light System



90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G9PR-8309060N-WN with Uplight Module
G9PR-8309060N-WN-U

Magnetic Uplight Module 900

Order Info (Surface/ Wall Mounted GAME 900 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	G9SM-8279060N-BN
					3000K	90°	10500lm	7900lm	G9SM-8309060N-BN
					4000K	90°	11000lm	8700lm	G9SM-8409060N-BN
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	4200lm	3200lm	UM90-827A128N-NN
					3000K	110°	4500lm	3400lm	UM90-830A128N-NN
					4000K	110°	4800lm	3600lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G9SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G9SM GAME 900 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**60** 60W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G9PW GAME 900 Pendant Wires		**830** CRI80/ 3000K						**F** On-Off		**B** Black				
G9PR GAME 900 Pendant Rod		**840** CRI80/ 4000K						**A** 1-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												





Project: Corporate Office Project, Panama





Project: Office Tensio Trondheim, Norway

SUGAR – Ceiling Light System

Project: Aurum University in Turku, Finland




SUGAR 350 – Ceiling Light System






Quick Info


- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 350 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	S3SM-8279012N-BG
					3000K	90°	2100lm	1700lm	S3SM-8309012N-BG
					4000K	90°	2300lm	1800lm	S3SM-8409012N-BG
					2700K-6500K	90°	Max.2100lm	Max.1750lm	S3SM-8T29012N-BG
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	S3SM-8279016N-BG
					3000K	90°	2700lm	2150lm	S3SM-8309016N-BG
					4000K	90°	2900lm	2350lm	S3SM-8409016N-BG
Uplight Module					2700K-6500K	90°	Max.2900lm	Max.2500lm	S3SM-8T29016N-BG
8W	10W	33V	250mA	80	2700K	110°	1300lm	1150lm	UM35-827A108N-NN
					3000K	110°	1400lm	1200lm	UM35-830A108N-NN
					4000K	110°	1500lm	1250lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S3SM – *** ** ** * – ** *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S3SM SUGAR 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**WW** White-White	**U** Uplight Module
S3PW SUGAR 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**BB** Black-Black	
S3PR SUGAR 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K-6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K-6500K Tunable White					

Optional Uplight Module



Code for S3SM-8309012N-BG with Uplight Module S3SM-8309012N-BG-U

Magnetic Uplight Module 350


SUGAR 450 – Ceiling Light System






Quick Info


- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 450 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	S4SM-8279016N-BG
					3000K	90°	2600lm	2300lm	S4SM-8309016N-BG
					4000K	90°	2800lm	2500lm	S4SM-8409016N-BG
					2700K-6500K	90°	Max.2900lm	Max.2300lm	S4SM-8T29016N-BG
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	S4SM-8279024N-BG
					3000K	90°	3700lm	3150lm	S4SM-8309024N-BG
					4000K	90°	4000lm	3400lm	S4SM-8409024N-BG
Uplight Module					2700K-6500K	90°	Max.4100lm	Max.3200lm	S4SM-8T29024N-BG
11W	13W	33V	350mA	80	2700K	110°	1700lm	1500lm	UM45-827A111N-NN
					3000K	110°	1850lm	1600lm	UM45-830A111N-NN
					4000K	110°	2000lm	1800lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S4SM – *** ** ** * – ** *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S4SM SUGAR 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**WW** White-White	**U** Uplight Module
S4PW SUGAR 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**BB** Black-Black	
S4PR SUGAR 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K-6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K-6500K Tunable White					

Optional Uplight Module



Code for S4SM-8309016N-WN with Uplight Module S4SM-8309016N-WN-U

Magnetic Uplight Module 450


SUGAR 600 – Ceiling Light System



90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info


- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 600 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	S6SM-8279024N-BG
					3000K	90°	3700lm	3000lm	S6SM-8309024N-BG
					4000K	90°	4000lm	3300lm	S6SM-8409024N-BG
					2700K-6500K	90°	Max.4100lm	Max.3400lm	S6SM-8T29024N-BG
36W	38W	34V	1050mA	80	2700K	90°	5800lm	4750lm	S6SM-8279036N-BG
					3000K	90°	6200lm	5000lm	S6SM-8309036N-BG
					4000K	90°	6600lm	5300lm	S6SM-8409036N-BG
					2700K-6500K	90°	Max.6600lm	Max.5700lm	S6SM-8T29036N-BG
46W	48W	34V	1400mA	80	2700K	90°	7200lm	5850lm	S6SM-8279046N-BG
					3000K	90°	8100lm	6150lm	S6SM-8309046N-BG
					4000K	90°	8600lm	6700lm	S6SM-8409046N-BG
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	2700lm	2200lm	UM60-827A118N-NN
					3000K	110°	2850lm	2400lm	UM60-830A118N-NN
					4000K	110°	3000lm	2600lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S6SM	–	***		**		**		*	–	**		*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Accessory**
S6SM SUGAR 600 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**24** 24W		**N** No Driver		**WW** White-White		**U** Uplight Module
S6PW SUGAR 600 Pendant Wires		**830** CRI80/ 3000K				**36** 36W		**F** On-Off		**BB** Black-Black		
S6PR SUGAR 600 Pendant Rod		**840** CRI80/ 4000K				**46** 46W *		**P** Phase Dim		**BG** Black-Gold		
		8T2 CRI80 2700K-6500K Tunable White						**A** 1-10V Dim		**WG** White-Gold (Optional)		
		927 CRI90/ 2700K						**D** DALI Dim				
		930 CRI90/ 3000K										
		940 CRI90/ 4000K										
		9T2 CRI90 2700K-6500K Tunable White										

* LED 46W is not available with Tunable White

Optional Uplight Module



Code for G6PR-8309036N-BG with Uplight Module G6PR-8309036N-BG-U

Magnetic Uplight Module 600


SUGAR 900 – Ceiling Light System



90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 900 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	S9SM-8279060N-BG
					3000K	90°	10500lm	7900lm	S9SM-8309060N-BG
					4000K	90°	11000lm	8700lm	S9SM-8409060N-BG
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	4200lm	3200lm	UM90-827A128N-NN
					3000K	110°	4500lm	3400lm	UM90-830A128N-NN
					4000K	110°	4800lm	3600lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S9SM	–	***		**		**		*	–	**		*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Accessory**
S9SM SUGAR 900 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**60** 60W		**N** No Driver		**WW** White-White		**U** Uplight Module
S9PW SUGAR 900 Pendant Wires		**830** CRI80/ 3000K						**F** On-Off		**BB** Black-Black		
S9PR SUGAR 900 Pendant Rod		**840** CRI80/ 4000K						**A** 1-10V Dim		**BG** Black-Gold		
		927 CRI90/ 2700K						**D** DALI Dim		**WG** White-Gold (Optional)		
		930 CRI90/ 3000K										
		940 CRI90/ 4000K										

Optional Uplight Module



Code for S9PR-8309060N-BG with Uplight Module S9PR-8309060N-BG-U

Magnetic Uplight Module 900

GLAMOR

3000K-3500K-4000K CCT Switchable
Lumen efficiency up to 130 lm/W
Three diameters available: Ø300, Ø400, Ø600
Surface Mounted and Pendant
IP44, UGR≤15




GLAMOR 300 – CCT Switchable LED Ceiling Light



3000K 3500K 4000K | 80° | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 8W, 11W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 1200lm, 1600lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 300 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	@3000K	80°	1650lm	1100lm	G3RS-8S38010F-WN
					@3500K	80°	1700lm	1150lm	
					@4000K	80°	1800lm	1200lm	
11W	13W	33V	350mA	80	@3000K	80°	2150lm	1450lm	G3RS-8S38013F-WN
					@3500K	80°	2200lm	1500lm	
					@4000K	80°	2300lm	1600lm	

Code Remark: F=F (ON-OFF) P=P (Phase Dim) A=A (1-10V Dim) D=D(DALI Dim)

Coding

G3RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G3RS GLAMOR 300 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**10** 10W	**F** On-Off	**W** White	**N** None	
G3RP GLAMOR 300 Pendant Wires			**13** 13W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			


GLAMOR 400 – CCT Switchable LED Ceiling Light



3000K 3500K 4000K | 80° | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018F-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025F-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Code Remark: F=F (ON-OFF) P=P (Phase Dim) A=A (1-10V Dim) D=D(DALI Dim)

Coding

G4RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G4RS GLAMOR 400 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W	**F** On-Off	**W** White	**N** None	
G4RP GLAMOR 400 Pendant Wires			**25** 25W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			

GLAMOR 400 – CCT Switchable LED Ceiling Light





80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44

CE | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Microwave Sensor





Light Distribution

☐ 4000K

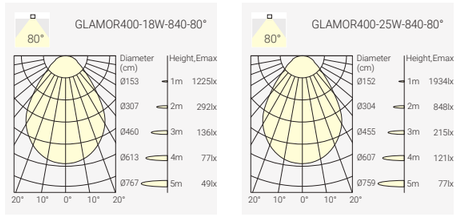

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018S-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025S-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Coding

G4RS	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
G4RS GLAMOR 400 Suface/ Wall Mounted		8S3 CRI>80/ 3000K -3500K-4000K Switchable	80 80°	18 18W	S On-Off LED Driver +Microwave Sensor		W White	N None		
G4RP GLAMOR 400 Pendant Wires				25 25W			B Black			

GLAMOR 400 – CCT Switchable LED Ceiling Light




80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44

CE | Emergency Backup | 5 YEARS GUARANTEE


Quick Info

- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Emergency Backup



Light Distribution

☐ 4000K

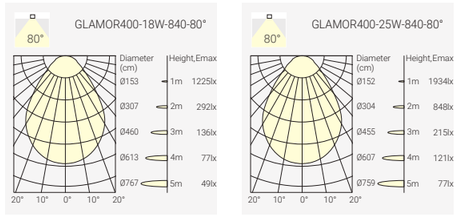

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018E-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025E-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Emergency lighting duration : 180mins
Emergency power : 5W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

Coding

G4RS	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
G4RS GLAMOR 400 Suface/ Wall Mounted		8S3 CRI>80/ 3000K -3500K-4000K Switchable	80 80°	18 18W	E On-Off LED Driver +Emergency Backup		W White	N None		
G4RP GLAMOR 400 Pendant Wires				25 25W			B Black			


GLAMOR 600 – CCT Switchable LED Ceiling Light



3000K
3500K
4000K
80°
CRI >80
UGR<19
IP44
5 YEARS GUARANTEE


Quick Info


- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

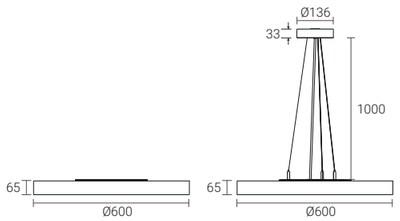

Light Distribution

4000K





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037F-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043F-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Code Remark: F=F (ON-OFF) P=P (Phase Dim) A=A (1-10V Dim) D=D(DALI Dim)

Coding

G6RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G6RS GLAMOR 600 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W	**F** On-Off	**W** White	**N** None	
G6RP GLAMOR 600 Pendant Wires			**43** 43W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			



GLAMOR 600 – CCT Switchable LED Ceiling Light




80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44

CE | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Microwave Sensor

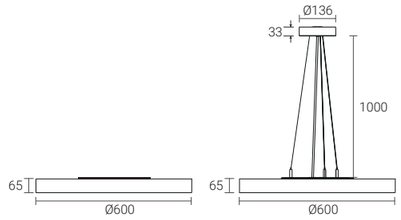

Microwave Sensor

Light Distribution

☐ 4000K

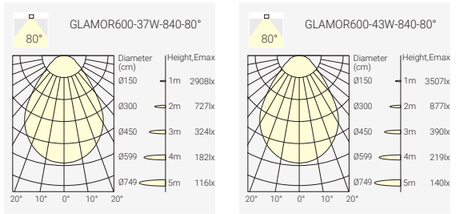

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037S-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043S-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Coding

G6RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G6RS GLAMOR 600 Suface/ Wall Mounted		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W	**S** On-Off LED Driver +Microwave Sensor		**W** White	**N** None		
G6RP GLAMOR 600 Pendant Wires				**43** 43W			**B** Black			

GLAMOR 600 – CCT Switchable LED Ceiling Light




80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44

CE | Emergency Backup | 5 YEARS GUARANTEE


Quick Info

- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Emergency Backup

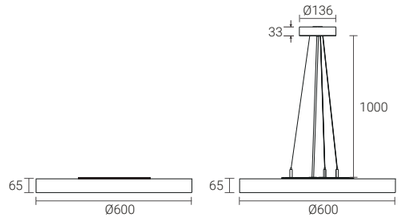

Light Distribution

☐ 4000K

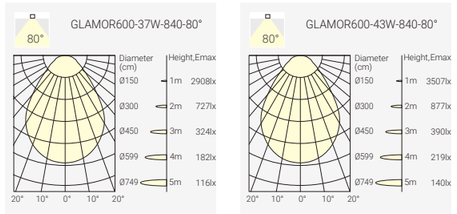

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037E-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043E-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Emergency lighting duration : 180mins
Emergency power : 5W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

Coding

G6RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G6RS GLAMOR 600 Suface/ Wall Mounted		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W	**E** On-Off LED Driver +Emergency Backup		**W** White	**N** None		
G6RP GLAMOR 600 Pendant Wires				**43** 43W			**B** Black			

MINT

2700K-3000K-4000K CCT Switchable

Power Switchable

Two sizes for options: φ280mm and φ420mm

Emergency function and Microwave


sensor function available

IP54



MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light







Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off

Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224F-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224F-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224F-WN

Code Remark: F=F(On-Off LED Driver, Power Switchable)


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK10 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor





Light Distribution

3000K

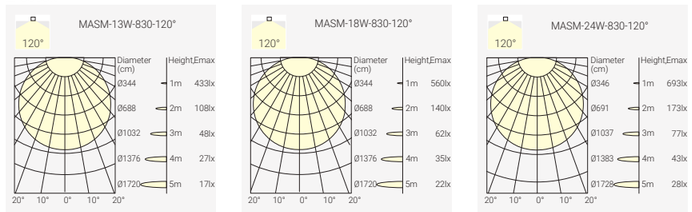

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1440lm 1500lm	MASM-8S3A224S-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224S-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224S-WN

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)

Finish



White


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | Emergency Backup | 5 YEARS GUARANTEE


Quick Info

- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup



Light Distribution

3000K

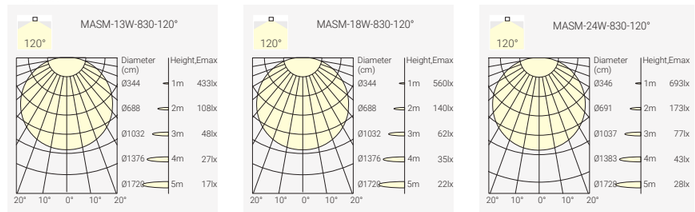

Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224E-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224E-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224E-WN

Emergency lighting duration：120mins
Emergency power：5W

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off




Light Distribution

3000K







Finish

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MBSM-8S3A235F-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MBSM-8S3A235F-WN
32W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MBSM-8S3A235F-WN

Code Remark: F=F(On-Off LED Driver, Power Switchable)



Project: Application Reference


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor





Light Distribution

3000K

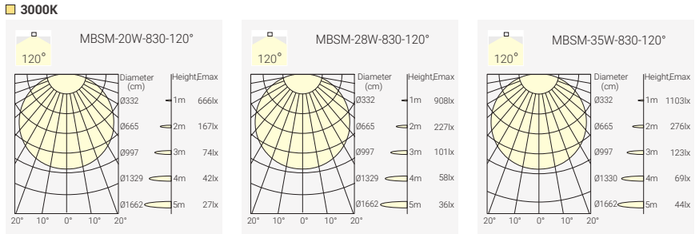

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MBSM-8S3A235S-WN
36W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MBSM-8S3A235S-WN
32W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MBSM-8S3A235S-WN

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)

Finish




White

MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light




Quick Info

- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup



Light Distribution

3000K

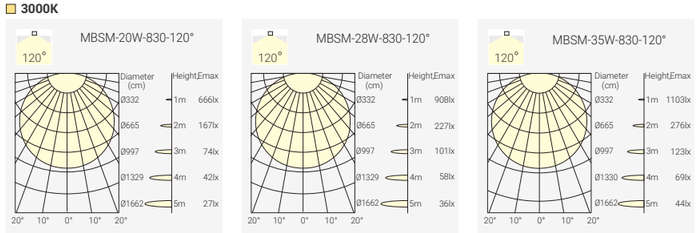

Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MBSM-8S3A235E-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MBSM-8S3A235E-WN
32W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MBSM-8S3A235E-WN

Emergency lighting duration：120mins
Emergency power：5W

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

MIU ART

Compact & minimalist design

Ceiling light in four compact sizes

Switchable CCT: 2700K / 3000K / 4000K

Convex lens optics, UGR<19

Phase Dim & DALI versions available

Premium finishes for refined interiors



MIU ART-S – Ceiling Mounted Light



36° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | LUMENS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMENS LED: AC COB, 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 240lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-S in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
3W	4W	220-240VAC	90	2700K	36°	300lm	210lm	MIAS-9273604P-BB
				3000K	36°	320lm	220lm	MIAS-9303604P-BB
				4000K	36°	350lm	240lm	MIAS-9403604P-BB

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAS – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAS MIU ART-S-4W	**927** CRI90/ 2700K **930** CRI90/ 3000K **940** CRI90/ 4000K	**36** 36°	**04** 4W	**P** Phase Dim	**WW** Wihte **BB** Black **GG** Gold **CR** Chrome	

MIU ART-M – Ceiling Mounted Light



48° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | LUMENS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMENS LED: AC COB, 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 48°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-M in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	220-240VAC	90	2700K	48°	670lm	520lm	MIAM-9274808P-BB
				3000K	48°	700lm	550lm	MIAM-9304808P-BB
				4000K	48°	750lm	600lm	MIAM-9404808P-BB

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAM – *** ** ** * – ** -

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAM MIU ART-M-8W	**927** CRI90/ 2700K **930** CRI90/ 3000K **940** CRI90/ 4000K	**48** 48°	**08** 8W	**P** Phase Dim	**WW** Wihte **BB** Black **GG** Gold **CR** Chrome	

MIU ART-S DALI – Ceiling Mounted Light

New



30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 470lm System Luminous Flux
- IP Class: IP20
- Dimming: DALI Dim



Light Distribution

3000K



Standard Finish



White Black

Optional Finish



Gold Chrome

*Customized Colors Optional

Order Info (MIU ART-S DALI in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	34V	150mA	90	2700K	30°	780lm	430lm	MIAS-9273006D-BB
					3000K	30°	810lm	450lm	MIAS-9303006D-BB
					4000K	30°	850lm	470lm	MIAS-9403006D-BB

Code Remark: D=D(DALI Dim)

Coding

MIAS – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAS MIU ART-S DALI	**927** CRI90/ 2700K **930** CRI90/ 3000K **940** CRI90/ 4000K	**30** 30°	**06** 6W	**D** DALI Dim	**WW** Wihte **BB** Black **GG** Gold **CR** Chrome	



MIU ART-M DALI – Ceiling Mounted Light


New



50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 8.5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 50°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP20
- Dimming: DALI Dim



Light Distribution

3000K



Standard Finish



White Black

Optional Finish



Gold Chrome

*Customized Colors Optional

Order Info (MIU ART-M DALI in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	50°	1400lm	770lm	MIAM-9275010D-BB
					3000K	50°	1440lm	800lm	MIAM-9305010D-BB
					4000K	50°	1500lm	840lm	MIAM-9405010D-BB

Code Remark: D=D(DALI Dim)

Coding

MIAM	–	***	**	**	*	–	**	–	
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
MIAM MIU ART-M DALI		927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	50 50°	10 10W	D DALI Dim		WW Wihte BB Black GG Gold CR Chrome		



Project: Application Reference

MIU

Architectural

Ceiling Light & Pendant Light

Elegant Design, No Visible Screw



Project: Office Borg Forvaltning Trondheim, Norway





Project: Office Borg Forvaltning Trondheim, Norway


MIU-C M – Ceiling Mounted Light



18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 2050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

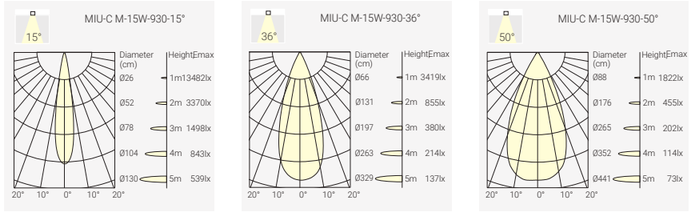

Finish



White Black

Order Info (MIU-C M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1500lm	1250lm	MCM1-9271515F-WB
						36°	1500lm	1300lm	MCM1-9273615F-WB
						50°	1500lm	1250lm	MCM1-9275015F-WB
					3000K	15°	1600lm	1350lm	MCM1-9301515F-WB
						36°	1600lm	1400lm	MCM1-9303615F-WB
						50°	1600lm	1350lm	MCM1-9305015F-WB
					4000K	15°	1700lm	1450lm	MCM1-9401515F-WB
						36°	1700lm	1500lm	MCM1-9403615F-WB
						50°	1700lm	1450lm	MCM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	2100lm	1850lm	MCM2-9271521F-WB
						36°	2100lm	1950lm	MCM2-9273621F-WB
						50°	2100lm	1850lm	MCM2-9275021F-WB
					3000K	15°	2200lm	1950lm	MCM2-9301521F-WB
						36°	2200lm	2050lm	MCM2-9303621F-WB
						50°	2200lm	1950lm	MCM2-9305021F-WB
					4000K	15°	2300lm	2050lm	MCM2-9401521F-WB
						36°	2300lm	2150lm	MCM2-9403621F-WB
						50°	2300lm	2050lm	MCM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1 MIU-C M-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**W** Wihte	**H** Honeycomb
MCM2 MIU-C M-21W	**930** CRI90/ 3000K	**36** 36°	**21** 21W	**P*** Phase Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K	**50** 50°		**D*** DALI Dim		**G** Gold	

* 21W is not available with Phase Dim, DALI Dim

Optional accessary



Honeycomb

Code for MCM1-9301515F-WB with Honeycomb
MCM1-9301515F-WB-H


MIU-C L – Ceiling Mounted Light



18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 3250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K

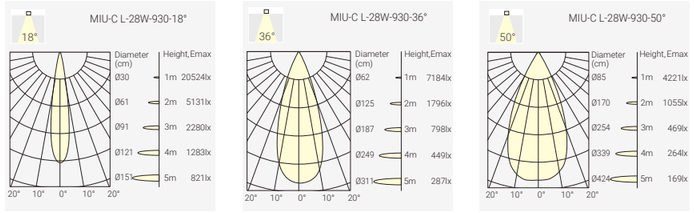

Finish



White Black

Order Info (MIU-C L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2850lm	MCL1-9271828F-WB
						36°	3000lm	2850lm	MCL1-9273628F-WB
						50°	3000lm	2850lm	MCL1-9275028F-WB
					3000K	18°	3250lm	3050lm	MCL1-9301828F-WB
						36°	3250lm	3050lm	MCL1-9303628F-WB
						50°	3250lm	3050lm	MCL1-9305028F-WB
					4000K	18°	3450lm	3250lm	MCL1-9401828F-WB
						36°	3450lm	3250lm	MCL1-9403628F-WB
						50°	3450lm	3250lm	MCL1-9405028F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Optional accessary



Honeycomb

Code for MCL1-9301828F-WB with Honeycomb
MCL1-9301828F-WB-H

Coding

MCL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCL1 MIU-C L	**927** CRI90/ 2700K	**18** 18°	**28** 28W	**F** On-Off	**W** Wihte	**W** Wihte	**H** Honeycomb
	930 CRI90/ 3000K	**36** 36°		**D** DALI Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K	**50** 50°				**G** Gold	


MIU-P S – Pendant Light



18° 36° 50° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

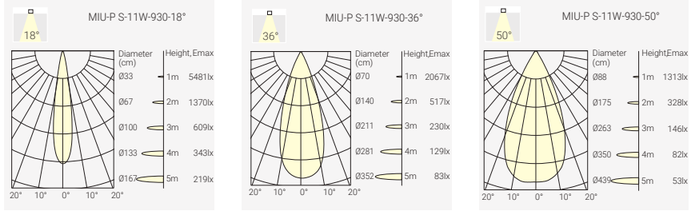

Finish



White Black

Order Info (MIU-P S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	1200lm	800lm	MPS1-9271811F-WB
						36°	1200lm	800lm	MPS1-9273611F-WB
						50°	1200lm	800lm	MPS1-9275011F-WB
					3000K	18°	1300lm	850lm	MPS1-9301811F-WB
						36°	1300lm	850lm	MPS1-9303611F-WB
						50°	1300lm	850lm	MPS1-9305011F-WB
					4000K	18°	1400lm	950lm	MPS1-9401811F-WB
						36°	1400lm	950lm	MPS1-9403611F-WB
						50°	1400lm	950lm	MPS1-9405011F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPS1	927	15	11	F	W	W	H
MIU-P S-11W	CRI90/ 2700K	15°	11W	On-Off	Wihte	Wihte	Honeycomb
	930	36		P	B	B	
	CRI90/ 3000K	36°		Phase Dim	Black	Black	
	940	50		D	G	G	
	CRI90/ 4000K	50°		DALI Dim	Gold	Gold	

Optional accessary



Honeycomb

Code for MPS1-9301811F-WB with Honeycomb
MPS1-9301811F-WB-H


MIU-P M – Pendant Light



18° 36° 50° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 2050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

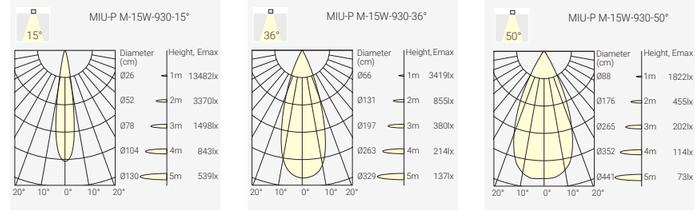

Finish



White Black

Order Info (MIU-P M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1500lm	1250lm	MPM1-9271515F-WB
						36°	1500lm	1300lm	MPM1-9273615F-WB
						50°	1500lm	1250lm	MPM1-9275015F-WB
					3000K	15°	1600lm	1350lm	MPM1-9301515F-WB
						36°	1600lm	1400lm	MPM1-9303615F-WB
						50°	1600lm	1350lm	MPM1-9305015F-WB
					4000K	15°	1700lm	1450lm	MPM1-9401515F-WB
						36°	1700lm	1500lm	MPM1-9403615F-WB
						50°	1700lm	1450lm	MPM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	2100lm	1850lm	MPM2-9271521F-WB
						36°	2100lm	1950lm	MPM2-9273621F-WB
						50°	2100lm	1850lm	MPM2-9275021F-WB
					3000K	15°	2200lm	1950lm	MPM2-9301521F-WB
						36°	2200lm	2050lm	MPM2-9303621F-WB
						50°	2200lm	1950lm	MPM2-9305021F-WB
					4000K	15°	2300lm	2050lm	MPM2-9401521F-WB
						36°	2300lm	2150lm	MPM2-9403621F-WB
						50°	2300lm	2050lm	MPM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Optional accessary



Honeycomb

Code for MPM1-9301515F-WB with Honeycomb
MPM1-9301515F-WB-H

Coding


MPM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPM1	927	15	15	F	W	W	H
MIU-P M-15W	CRI90/ 2700K	15°	15W	On-Off	Wihte	Wihte	Honeycomb
MPM2	930	36	21	P*	B	B	
MIU-P M-21W	CRI90/ 3000K	36°	21W	Phase Dim	Black	Black	
	940	50		D*	G	G	
	CRI90/ 4000K	50°		DALI Dim	Gold	Gold	

* 21W is not available with Phase Dim, DALI Dim

MIU-P L – Pendant Light






18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 3250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

3000K

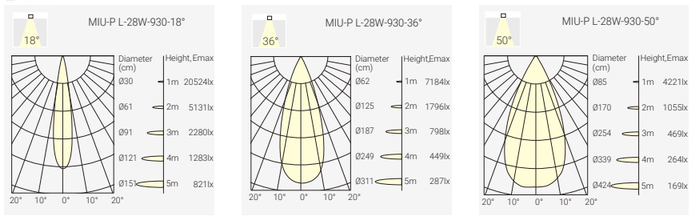

Finish



White Black

Order Info (MIU-P L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2850lm	MPL1-9271828F-WB
						36°	3000lm	2850lm	MPL1-9273628F-WB
						50°	3000lm	2850lm	MPL1-9275028F-WB
					3000K	18°	3250lm	3050lm	MPL1-9301828F-WB
						36°	3250lm	3050lm	MPL1-9303628F-WB
						50°	3250lm	3050lm	MPL1-9305028F-WB
					4000K	18°	3450lm	3250lm	MPL1-9401828F-WB
						36°	3450lm	3250lm	MPL1-9403628F-WB
						50°	3450lm	3250lm	MPL1-9405028F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Optional accessary



Code for MPL1-9301828F-WB with Honeycomb
MPL1-9301828F-WB-H

Honeycomb

Coding

MPL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPL1	**927**	**15**	**28**	**F**	**W**	**W**	**H**
MIU-P L-28W	CRI90/ 2700K	15°	28W	**On-Off**	Wihte	Wihte	Honeycomb
	930	**36**		**D**	**B**	**B**	
	CRI90/ 3000K	36°		DALI Dim	Black	Black	
	940	**50**				**G**	
	CRI90/ 4000K	50°				Gold	



VIBES







Different Mounting Bases (White/ Black)

Surface Mounted



1RC Base



1SC Base



2RC Base



2SC Base

Recessed Mounted



1RR Base



1SR Base



2RR Base



2SR Base

Accessory



Honeycomb

Module Color



Black



Brushed Gold



Chrome



White


VIBES V1RC – Single-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW	H Honeycomb
	930 CRI90/ 3000K				BB	
					BC	
					BG	

Optional accessory



Code for V1RC-9273614P-WW with Honeycomb
V1RC-9273614P-WW-H

Honeycomb


VIBES V2RC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V2RC-9273628P-WW with Honeycomb
V2RC-9273628P-WW-H

Honeycomb


VIBES V1SC – Single-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V1SC-9273614P-WW with Honeycomb
V1SC-9273614P-WW-H

Honeycomb


VIBES V2SC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V2SC-9273628P-WW with Honeycomb
V2SC-9273628P-WW-H

Honeycomb


VIBES V1RR – Single-Head Ceiling Mounted Spotlight






Quick Info


- Bridgelux LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1RR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V1RR		**927** CRI90/ 2700K	**36** 36°	**14** 14W	**P** Phase Dim		**WW** Wihte-Wihte (WW)		**H** Honeycomb
		930 CRI90/ 3000K			**D** DALI Dim		**BB** Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V1RR-9273614P-WW with Honeycomb
V1RR-9273614P-WW-H

Honeycomb


VIBES V2RR – Double-Head Ceiling Mounted Spotlight






Quick Info


- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2RR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V2RR		**927** CRI90/ 2700K	**36** 36°	**28** 28W	**P** Phase Dim		**WW** Wihte-Wihte (WW)		**H** Honeycomb
		930 CRI90/ 3000K			**D** DALI Dim		**BB** Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V2RR-9273628P-WW with Honeycomb
V2RR-9273628P-WW-H

Honeycomb


VIBES V1SR – Single-Head Recessed Soptlight






Quick Info


- Bridgelux LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1SR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V1SR		927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim		WW Wihte-Wihte (WW)		H Honeycomb
		930 CRI90/ 3000K			D DALI Dim		BB Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V1SR-9273614P-WW with Honeycomb
V1SR-9273614P-WW-H

Honeycomb


VIBES V2SR – Double-Head Recessed Soptlight






Quick Info


- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2SR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V2SR		927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim		WW Wihte-Wihte (WW)		H Honeycomb
		930 CRI90/ 3000K			D DALI Dim		BB Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V2SR-9273628P-WW with Honeycomb
V2SR-9273628P-WW-H

Honeycomb

KENZO

Recessed Adjustable Spotlight
Powerful Light & Energy Efficient
Suitable for Any Architectural Ambience





Project: Likuid Spaces, Sri Lanka



KENZO – Recessed Adjustable Spotlight

Project: Pinto Architectural and Design Agency, France



KENZO K1X30– Recessed Adjustable Spotlight





15° 30° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CREE 50,000h@L80B10 | 0-90° 350° | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø46mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 40°, 50°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim







Light Distribution

2700K







Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessary



Code for K1S-9405504N-WG with Honeycomb
K1S-9405504N-WG-H

Honeycomb

Order Info (KENZO K1X30 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim D=D(DALI Dim)

Coding

K1S – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1S KENZO K1X30	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**55** 55°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			

KENZO K1X55– Recessed Adjustable Spotlight





18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 0-90° 350° | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø80mm for Trim Version
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K







Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessary



Code for K1M-9402409N-WG with Honeycomb
K1M-9402409-WG-H

Honeycomb

Order Info (KENZO K1X55 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	18°	1200lm	760lm	K1M-9271809N-WB
						24°	1200lm	800lm	K1M-9272409N-WB
						36°	1200lm	880lm	K1M-9273609N-WB
					3000K	18°	1300lm	800lm	K1M-9301809N-WB
						24°	1300lm	850lm	K1M-9302409N-WB
						36°	1300lm	920lm	K1M-9303609N-WB
					4000K	18°	1400lm	820lm	K1M-9401809N-WB
						24°	1400lm	870lm	K1M-9402409N-WB
						36°	1400lm	950lm	K1M-9403609N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim D=D(DALI Dim)

Coding

K1M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1M KENZO K1X55	**927** CRI>90/ 2700K	**18** 18°	**09** 9W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			

KENZO K1X70– Recessed Adjustable Spotlight




15° 25° 30° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 0-90° 350° | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 25°, 30°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim




Light Distribution

2700K

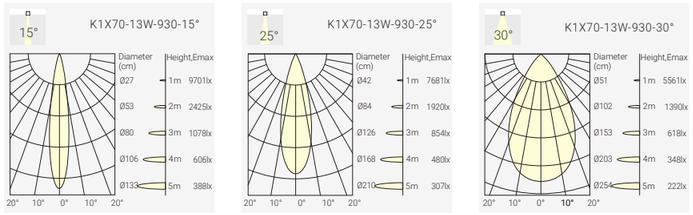

Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessary



Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H

Honeycomb

Order Info (KENZO K1X70 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1200lm	K1L1-9271513N-WB
						25°	1700lm	1350lm	K1L1-9272513N-WB
						30°	1700lm	1550lm	K1L1-9273013N-WB
					3000K	15°	1800lm	1300lm	K1L1-9301513N-WB
						25°	1800lm	1450lm	K1L1-9302513N-WB
						30°	1800lm	1600lm	K1L1-9303013N-WB
					4000K	15°	1900lm	1350lm	K1L1-9401513N-WB
						25°	1900lm	1500lm	K1L1-9402513N-WB
						30°	1900lm	1650lm	K1L1-9403013N-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1650lm	K1L2-9271518N-WB
						25°	2400lm	1850lm	K1L2-9272518N-WB
						30°	2400lm	2000lm	K1L2-9273018N-WB
					3000K	15°	2500lm	1700lm	K1L2-9301518N-WB
						25°	2500lm	1900lm	K1L2-9302518N-WB
						30°	2500lm	2100lm	K1L2-9303018N-WB
					4000K	15°	2600lm	1750lm	K1L2-9401518N-WB
						25°	2600lm	2000lm	K1L2-9402518N-WB
						30°	2600lm	2200lm	K1L2-9403018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)

Coding

K1L1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1L1 K1X70-13W	**927** CRI>90/ 2700K	**15** 15°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
K1L2 K1X70-18W	**930** CRI>90/ 3000K	**25** 25°	**18** 18W	**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**30** 30°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			







PURE-25 40 55

Directional spotlight with compact form
Semi-recessed & ceiling-mounted versions
Three sizes in Ø25 / Ø40 / Ø50 mm
High visual comfort with focused light output



Project: Application reference


PURE 25-R – Semi-Recessed Spotlight



24° 36° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

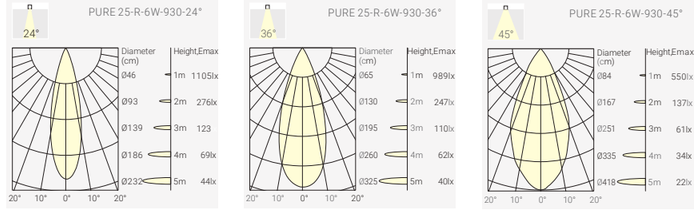

Finish



White Black

Order Info (PURE 25-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	34V	150mA	90	2700K	24°	550lm	360lm	PU2R-9272406F-WB
						36°	550lm	360lm	PU2R-9273606F-WB
						45°	550lm	360lm	PU2R-9275506F-WB
					3000K	24°	600lm	380lm	PU2R-9302406F-WB
						36°	600lm	380lm	PU2R-9303606F-WB
						45°	600lm	380lm	PU2R-9305506F-WB
					4000K	24°	650lm	400lm	PU2R-9402406F-WB
						36°	650lm	400lm	PU2R-9403606F-WB
						45°	650lm	400lm	PU2R-9405506F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PUAC-9302406F-WB with Honeycomb
PUAC-9302406F-WB-H

Coding

PU2R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU2R PURE 25-R	927 CRI90/ 2700K	24 24°	06 6W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	36 36°		P Phase Dim	B Black		
	940 CRI90/ 4000K	45 45°		A 1-10V Dim			
				D DALI Dim			

PURE 40-R – Semi-Recessed Spotlight



24° 40° 60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°, 60°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

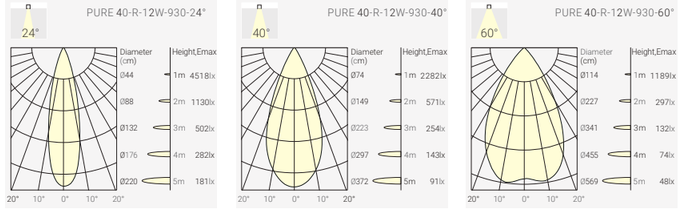

Finish



White Black

Order Info (PURE 40-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1400lm	1050lm	PU4R-9272412F-WB
						40°	1400lm	1050lm	PU4R-9274012F-WB
						60°	1400lm	1050lm	PU4R-9276012F-WB
					3000K	24°	1500lm	1100lm	PU4R-9302412F-WB
						40°	1500lm	1100lm	PU4R-9304012F-WB
						60°	1500lm	1100lm	PU4R-9306012F-WB
					4000K	24°	1600lm	1150lm	PU4R-9402412F-WB
						40°	1600lm	1150lm	PU4R-9404012F-WB
						60°	1600lm	1150lm	PU4R-9406312F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PU4R-9302412F-WB with Honeycomb
PU4R-9302412F-WB-H


Coding

PU4R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU4R PURE 40-R	927 CRI90/ 2700K	24 24°	12 12W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	40 40°		P Phase Dim	B Black		
	940 CRI90/ 4000K	60 60°		A 1-10V Dim			
				D DALI Dim			


PURE 55-R – Semi-Recessed Spotlight



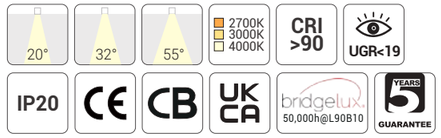


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 32°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

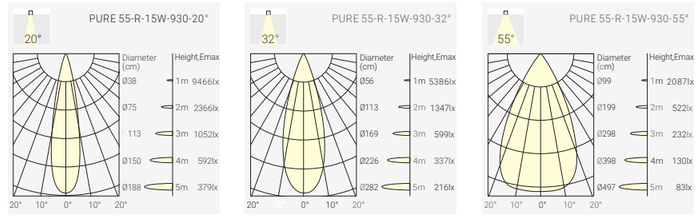

Finish



White

Black

Order Info (PURE 55-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	PU5R-9272015F-WB
						32°	1700lm	1500lm	PU5R-9273215F-WB
						55°	1700lm	1500lm	PU5R-9275515F-WB
					3000K	20°	1800lm	1550lm	PU5R-9302015F-WB
						30°	1800lm	1550lm	PU5R-9303215F-WB
						55°	1800lm	1550lm	PU5R-9305515F-WB
					4000K	20°	1900lm	1600lm	PU5R-9402015F-WB
						30°	1900lm	1600lm	PU5R-9403215F-WB
						55°	1900lm	1600lm	PU5R-9405515F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PU5R-9302015F-WB with Honeycomb
PU5R-9302015F-WB-H

Coding

PU5R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU5R PURE 55-R	927 CRI90/ 2700K	20 20°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	32 32°		P Phase Dim	B Black		
	940 CRI90/ 4000K	55 55°		A 1-10V Dim			
				D DALI Dim			

PURE 25-R



PURE 40-R




PURE 55-R




PURE 40-C – Ceiling Mounted Spotlight



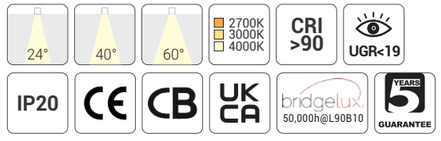


Quick Info

- Bridgelux LED: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°, 60°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

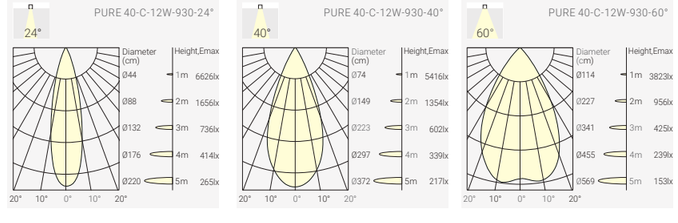

Finish



White Black

Order Info (PURE 40-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1400lm	1050lm	PU4C-9272412F-WB
						40°	1400lm	1050lm	PU4C-9274012F-WB
						60°	1400lm	1050lm	PU4C-9276012F-WB
					3000K	24°	1500lm	1100lm	PU4C-9302412F-WB
						40°	1500lm	1100lm	PU4C-9304012F-WB
						60°	1500lm	1100lm	PU4C-9306012F-WB
					4000K	24°	1600lm	1150lm	PU4C-9402412F-WB
						40°	1600lm	1150lm	PU4C-9404012F-WB
						60°	1600lm	1150lm	PU4C-9406312F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Code for PU4C-9302412F-WB with Honeycomb
PU4C-9302412F-WB-H

Honeycomb


Coding

PU4C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU4C PURE 40-C	927 CRI90/ 2700K	24 24°	12 12W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	40 40°		P Phase Dim	B Black		
	940 CRI90/ 4000K	60 60°		A 1-10V Dim			
				D DALI Dim			


PURE 55-C – Ceiling Mounted Spotlight



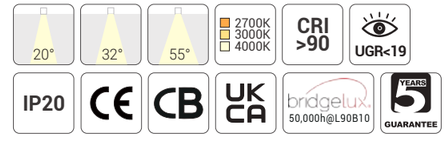


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 32°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

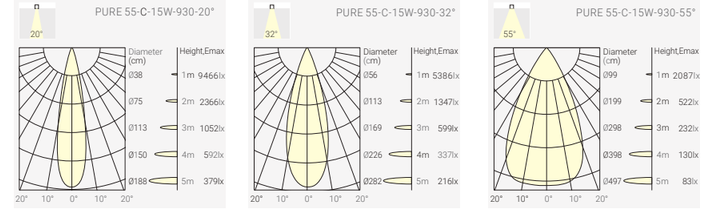

Finish



White Black

Order Info (PURE 55-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	PU5C-9272015F-WB
						32°	1700lm	1500lm	PU5C-9273215F-WB
						55°	1700lm	1500lm	PU5C-9275515F-WB
					3000K	20°	1800lm	1550lm	PU5C-9302015F-WB
						30°	1800lm	1550lm	PU5C-9303215F-WB
						55°	1800lm	1550lm	PU5C-9305515F-WB
					4000K	20°	1900lm	1600lm	PU5C-9402015F-WB
						30°	1900lm	1600lm	PU5C-9403215F-WB
						55°	1900lm	1600lm	PU5C-9405515F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Code for PU5C-9302015F-WB with Honeycomb
PU5C-9302015F-WB-H

Honeycomb

Coding

PU5C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU5C PURE 55-C	927 CRI90/ 2700K	20 20°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	32 32°		P Phase Dim	B Black		
	940 CRI90/ 4000K	55 55°		A 1-10V Dim			
				D DALI Dim			

PURE-C

Ceiling Mounted Spotlight
Integrated LED Driver
No Visible Screw



Project: Clarence House, UK


PURE Art-C – Ceiling Mounted Spotlight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

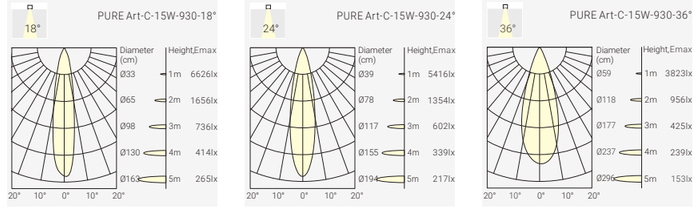

Finish



White Black

Optional accessary



Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

Honeycomb

Order Info (PURE Art-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	PUAC-9271815F-WB
						24°	1700lm	1150lm	PUAC-9272415F-WB
						36°	1700lm	1200lm	PUAC-9273615F-WB
						50°	1700lm	1250lm	PUAC-9275015F-WB
					3000K	18°	1800lm	1150lm	PUAC-9301815F-WB
						24°	1800lm	1200lm	PUAC-9302415F-WB
						36°	1800lm	1300lm	PUAC-9303615F-WB
						50°	1800lm	1350lm	PUAC-9305015F-WB
					4000K	18°	1900lm	1200lm	PUAC-9401815F-WB
						24°	1900lm	1250lm	PUAC-9402415F-WB
						36°	1900lm	1350lm	PUAC-9403615F-WB
						50°	1900lm	1400lm	PUAC-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Coding

PUAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUAC PURE Art-C	927 CRI90/ 2700K	18 18°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	24 24°		P Phase Dim	B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					


PURE S-C – Ceiling Mounted Spotlight



15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

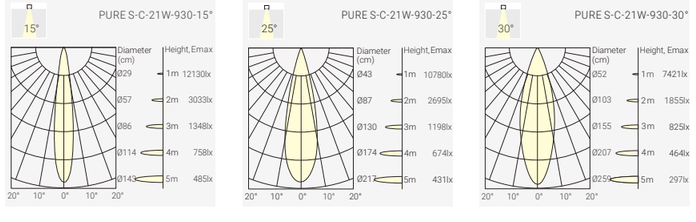

Finish



White Black

Optional accessary



Code for PUAC-9302515F-WB with Honeycomb
PUAC-9302515F-WB-H

Honeycomb

Order Info (PURE S-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	250mA	90	2700K	15°	1700lm	1300lm	PUSC-9271509F-WB
						25°	1700lm	1350lm	PUSC-9272509F-WB
						30°	1700lm	1450lm	PUSC-9273009F-WB
						50°	1700lm	1100lm	PUSC-9275009F-WB
					3000K	15°	1800lm	1350lm	PUSC-9301509F-WB
						25°	1800lm	1400lm	PUSC-9302509F-WB
						30°	1800lm	1450lm	PUSC-9303009F-WB
						50°	1800lm	1150lm	PUSC-9305009F-WB
					4000K	15°	1900lm	1400lm	PUSC-9401509F-WB
						25°	1900lm	1450lm	PUSC-9402509F-WB
						30°	1900lm	1500lm	PUSC-9403009F-WB
						50°	1900lm	1200lm	PUSC-9405009F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUSC-9271513F-WB
						25°	2400lm	1950lm	PUSC-9272513F-WB
						30°	2400lm	2150lm	PUSC-9273013F-WB
						50°	2400lm	1450lm	PUSC-9275013F-WB
					3000K	15°	2500lm	1800lm	PUSC-9301513F-WB
						25°	2500lm	2100lm	PUSC-9302513F-WB
						30°	2500lm	2200lm	PUSC-9303013F-WB
						50°	2500lm	1500lm	PUSC-9305013F-WB
					4000K	15°	2600lm	1900lm	PUSC-9401513F-WB
						25°	2600lm	2200lm	PUSC-9402513F-WB
						30°	2600lm	2300lm	PUSC-9403013F-WB
						50°	2600lm	1600lm	PUSC-9405013F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

PUSC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUSC PURE-S-C	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	25 25°	21 21W	P Phase Dim	B Black		
	940 CRI90/ 4000K	30 30°		D DALI Dim			
		50 50°					

PURE

LED Tracklight
Integrated LED Driver
Elegant Design



Project: VALO Hotel Helsinki, Finland

PURE – LED Tracklight

Project: HSG Perfumery Stuttgart Airport, Germany







Project: Peled Studios, Israel

PURE – LED Tracklight

Project: Sara Kulturhu, Norway



Project: Maserati Showroom, Sofia, Bulgaria

PURE Art – LED Tracklight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 11W, 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish



White



Black

Order Info (PURE Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	18°	1200lm	800lm	PUA2-9271811F-WB
						24°	1200lm	850lm	PUA2-9272411F-WB
						36°	1200lm	900lm	PUA2-9273611F-WB
						50°	1200lm	950lm	PUA2-9275011F-WB
					3000K	18°	1300lm	850lm	PUA2-9301811F-WB
						24°	1300lm	900lm	PUA2-9302411F-WB
						36°	1300lm	950lm	PUA2-9303611F-WB
						50°	1300lm	1000lm	PUA2-9305011F-WB
					4000K	18°	1400lm	900lm	PUA2-9401811F-WB
						30°	1400lm	950lm	PUA2-9402411F-WB
						36°	1400lm	1000lm	PUA2-9403611F-WB
						50°	1400lm	1050lm	PUA2-9405011F-WB
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	PUA2-9271815F-WB
						24°	1700lm	1150lm	PUA2-9272415F-WB
						36°	1700lm	1200lm	PUA2-9273615F-WB
						50°	1700lm	1250lm	PUA2-9275015F-WB
					3000K	18°	1800lm	1150lm	PUA2-9301815F-WB
						24°	1800lm	1200lm	PUA2-9302415F-WB
						36°	1800lm	1300lm	PUA2-9303615F-WB
						50°	1800lm	1350lm	PUA2-9305015F-WB
					4000K	18°	1900lm	1200lm	PUA2-9401815F-WB
						24°	1900lm	1250lm	PUA2-9402415F-WB
						36°	1900lm	1350lm	PUA2-9403615F-WB
						50°	1900lm	1400lm	PUA2-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Code for PUA2-9302511F-WB with Honeycomb
PUA2-9302511F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

PUA2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUA2 PURE Art	927 CRI90/ 2700K	18 18°	11 11W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	24 24°	15 15W	P Phase Dim	B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					



PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

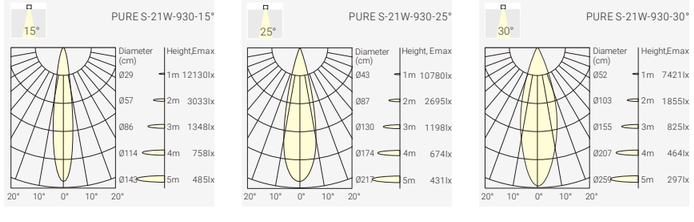

Finish



White Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1300lm	PUS1-9271515F-WB
						25°	1700lm	1350lm	PUS1-9272515F-WB
						30°	1700lm	1450lm	PUS1-9273015F-WB
						50°	1700lm	1100lm	PUS1-9275015F-WB
					3000K	15°	1800lm	1350lm	PUS1-9301515F-WB
						25°	1800lm	1400lm	PUS1-9302515F-WB
						30°	1800lm	1450lm	PUS1-9303015F-WB
						50°	1800lm	1150lm	PUS1-9305015F-WB
					4000K	15°	1900lm	1400lm	PUS1-9401515F-WB
						25°	1900lm	1450lm	PUS1-9402515F-WB
						30°	1900lm	1500lm	PUS1-9403015F-WB
						50°	1900lm	1200lm	PUS1-9405015F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUS2-9271521F-WB
						25°	2400lm	1950lm	PUS2-9272521F-WB
						30°	2400lm	2150lm	PUS2-9273021F-WB
						50°	4200lm	1450lm	PUS2-9275021F-WB
					3000K	15°	2500lm	1800lm	PUS2-9301521F-WB
						25°	2500lm	2100lm	PUS2-9302521F-WB
						30°	2500lm	2200lm	PUS2-9303021F-WB
						50°	2500lm	1500lm	PUS2-9305021F-WB
					4000K	15°	2600lm	1900lm	PUS2-9401521F-WB
						25°	2600lm	2200lm	PUS2-9402521F-WB
						30°	2600lm	2300lm	PUS2-9403021F-WB
						50°	2600lm	1600lm	PUS2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Honeycomb

Code for PUS1-9301515F-WB with Honeycomb
PUS1-9301515F-WB-H

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
PUS2 PURE S-21W	930 CRI90/3000K	24 24°	21 21W	P Phase Dim	B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | GLOBAL | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

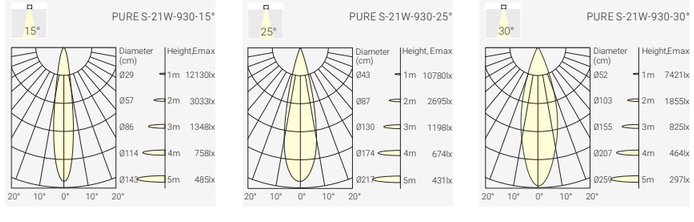

Finish



White Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	250mA	90	2700K	15°	1700lm	1300lm	PUS1-9271515D-WB
						25°	1700lm	1350lm	PUS1-9272515D-WB
						30°	1700lm	1450lm	PUS1-9273015D-WB
						50°	1700lm	1100lm	PUS1-9275015D-WB
					3000K	15°	1800lm	1350lm	PUS1-9301515D-WB
						25°	1800lm	1400lm	PUS1-9302515D-WB
						30°	1800lm	1450lm	PUS1-9303015D-WB
						50°	1800lm	1150lm	PUS1-9305015D-WB
					4000K	15°	1900lm	1400lm	PUS1-9401515D-WB
						25°	1900lm	1450lm	PUS1-9402515D-WB
						30°	1900lm	1500lm	PUS1-9403015D-WB
						50°	1900lm	1200lm	PUS1-9405015D-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUS2-9271521D-WB
						25°	2400lm	1950lm	PUS2-9272521D-WB
						30°	2400lm	2150lm	PUS2-9273021D-WB
						50°	2400lm	1450lm	PUS2-9275021D-WB
					3000K	15°	2500lm	1800lm	PUS2-9301521D-WB
						25°	2500lm	2100lm	PUS2-9302521D-WB
						30°	2500lm	2200lm	PUS2-9303021D-WB
						50°	2500lm	1500lm	PUS2-9305021D-WB
					4000K	15°	2600lm	1900lm	PUS2-9401521D-WB
						25°	2600lm	2200lm	PUS2-9402521D-WB
						30°	2600lm	2300lm	PUS2-9403021D-WB
						50°	2600lm	1600lm	PUS2-9405021D-WB

Code Remark: D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PUS1--9301515D-WB with Honeycomb
PUS1--9301515D-WB-H

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	927 CRI90/ 2700K	15 15°	15 15W	D DALI DIM	W White	B Black	H Honeycomb
PUS2 PURE S-21W	930 CRI90/3000K	24 24°	21 21W		B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE M – LED Tracklight




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

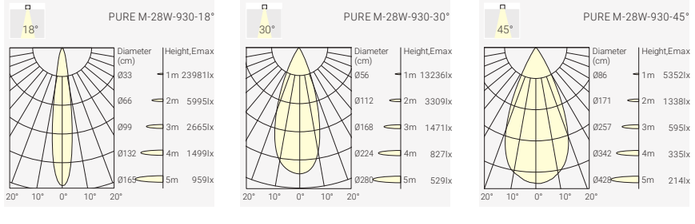

Finish



White Black

Order Info (PURE M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	3200lm	PUM1-9271828F-WB
						30°	3700lm	3300lm	PUM1-9273028F-WB
						45°	3700lm	3250lm	PUM1-9274528F-WB
					3000K	18°	3800lm	3300lm	PUM1-9301828F-WB
						30°	3800lm	3450lm	PUM1-9303028F-WB
						45°	3800lm	3350lm	PUM1-9304528F-WB
					4000K	18°	3900lm	3400lm	PUM1-9401828F-WB
						30°	3900lm	3550lm	PUM1-9403028F-WB
						45°	3900lm	3450lm	PUM1-9404528F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Honeycomb

Code for PUM1-9301828F-WB with Honeycomb
PUM1-9301828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
PUM1	927	18	28	F	W	B	H
PURE M	CRI90/ 2700K	18°	28W	On-Off	Wihte	Black	Honeycomb
	930	30			B		
	CRI90/3000K	30°			Black		
	940	45					
	CRI90/ 4000K	45°					

PURE M – LED Tracklight




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | GLOBAL LINE | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

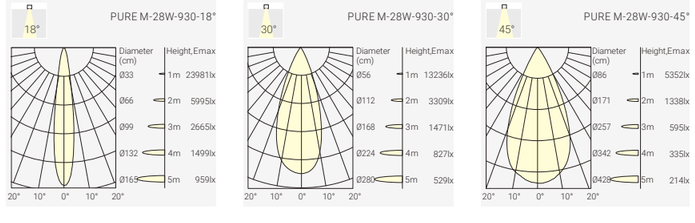

Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	3200lm	PUM1-9271828D-WB
						30°	3700lm	3300lm	PUM1-9273028D-WB
						45°	3700lm	3250lm	PUM1-9274528D-WB
					3000K	18°	3800lm	3300lm	PUM1-9301828D-WB
						30°	3800lm	3450lm	PUM1-9303028D-WB
						45°	3800lm	3350lm	PUM1-9304528D-WB
					4000K	18°	3900lm	3400lm	PUM1-9401828D-WB
						30°	3900lm	3550lm	PUM1-9403028D-WB
						45°	3900lm	3450lm	PUM1-9404528D-WB

Code Remark: D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PUM1--9301828D-WB with Honeycomb
PUM1--9301828D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
PUM1	927	18	28	D	W	B	H
PURE M	CRI90/ 2700K	18°	28W	DALI DIM	Wihte	Black	Honeycomb
	930	30			B		
	CRI90/3000K	30°			Black		
	940	45					
	CRI90/ 4000K	45°					


ROXY

In-track Driver LED Tracklight
Clean Design



Project: Clever armaturval för Kv Poolen, Sweden

ROXY – In-track Driver LED Tracklight

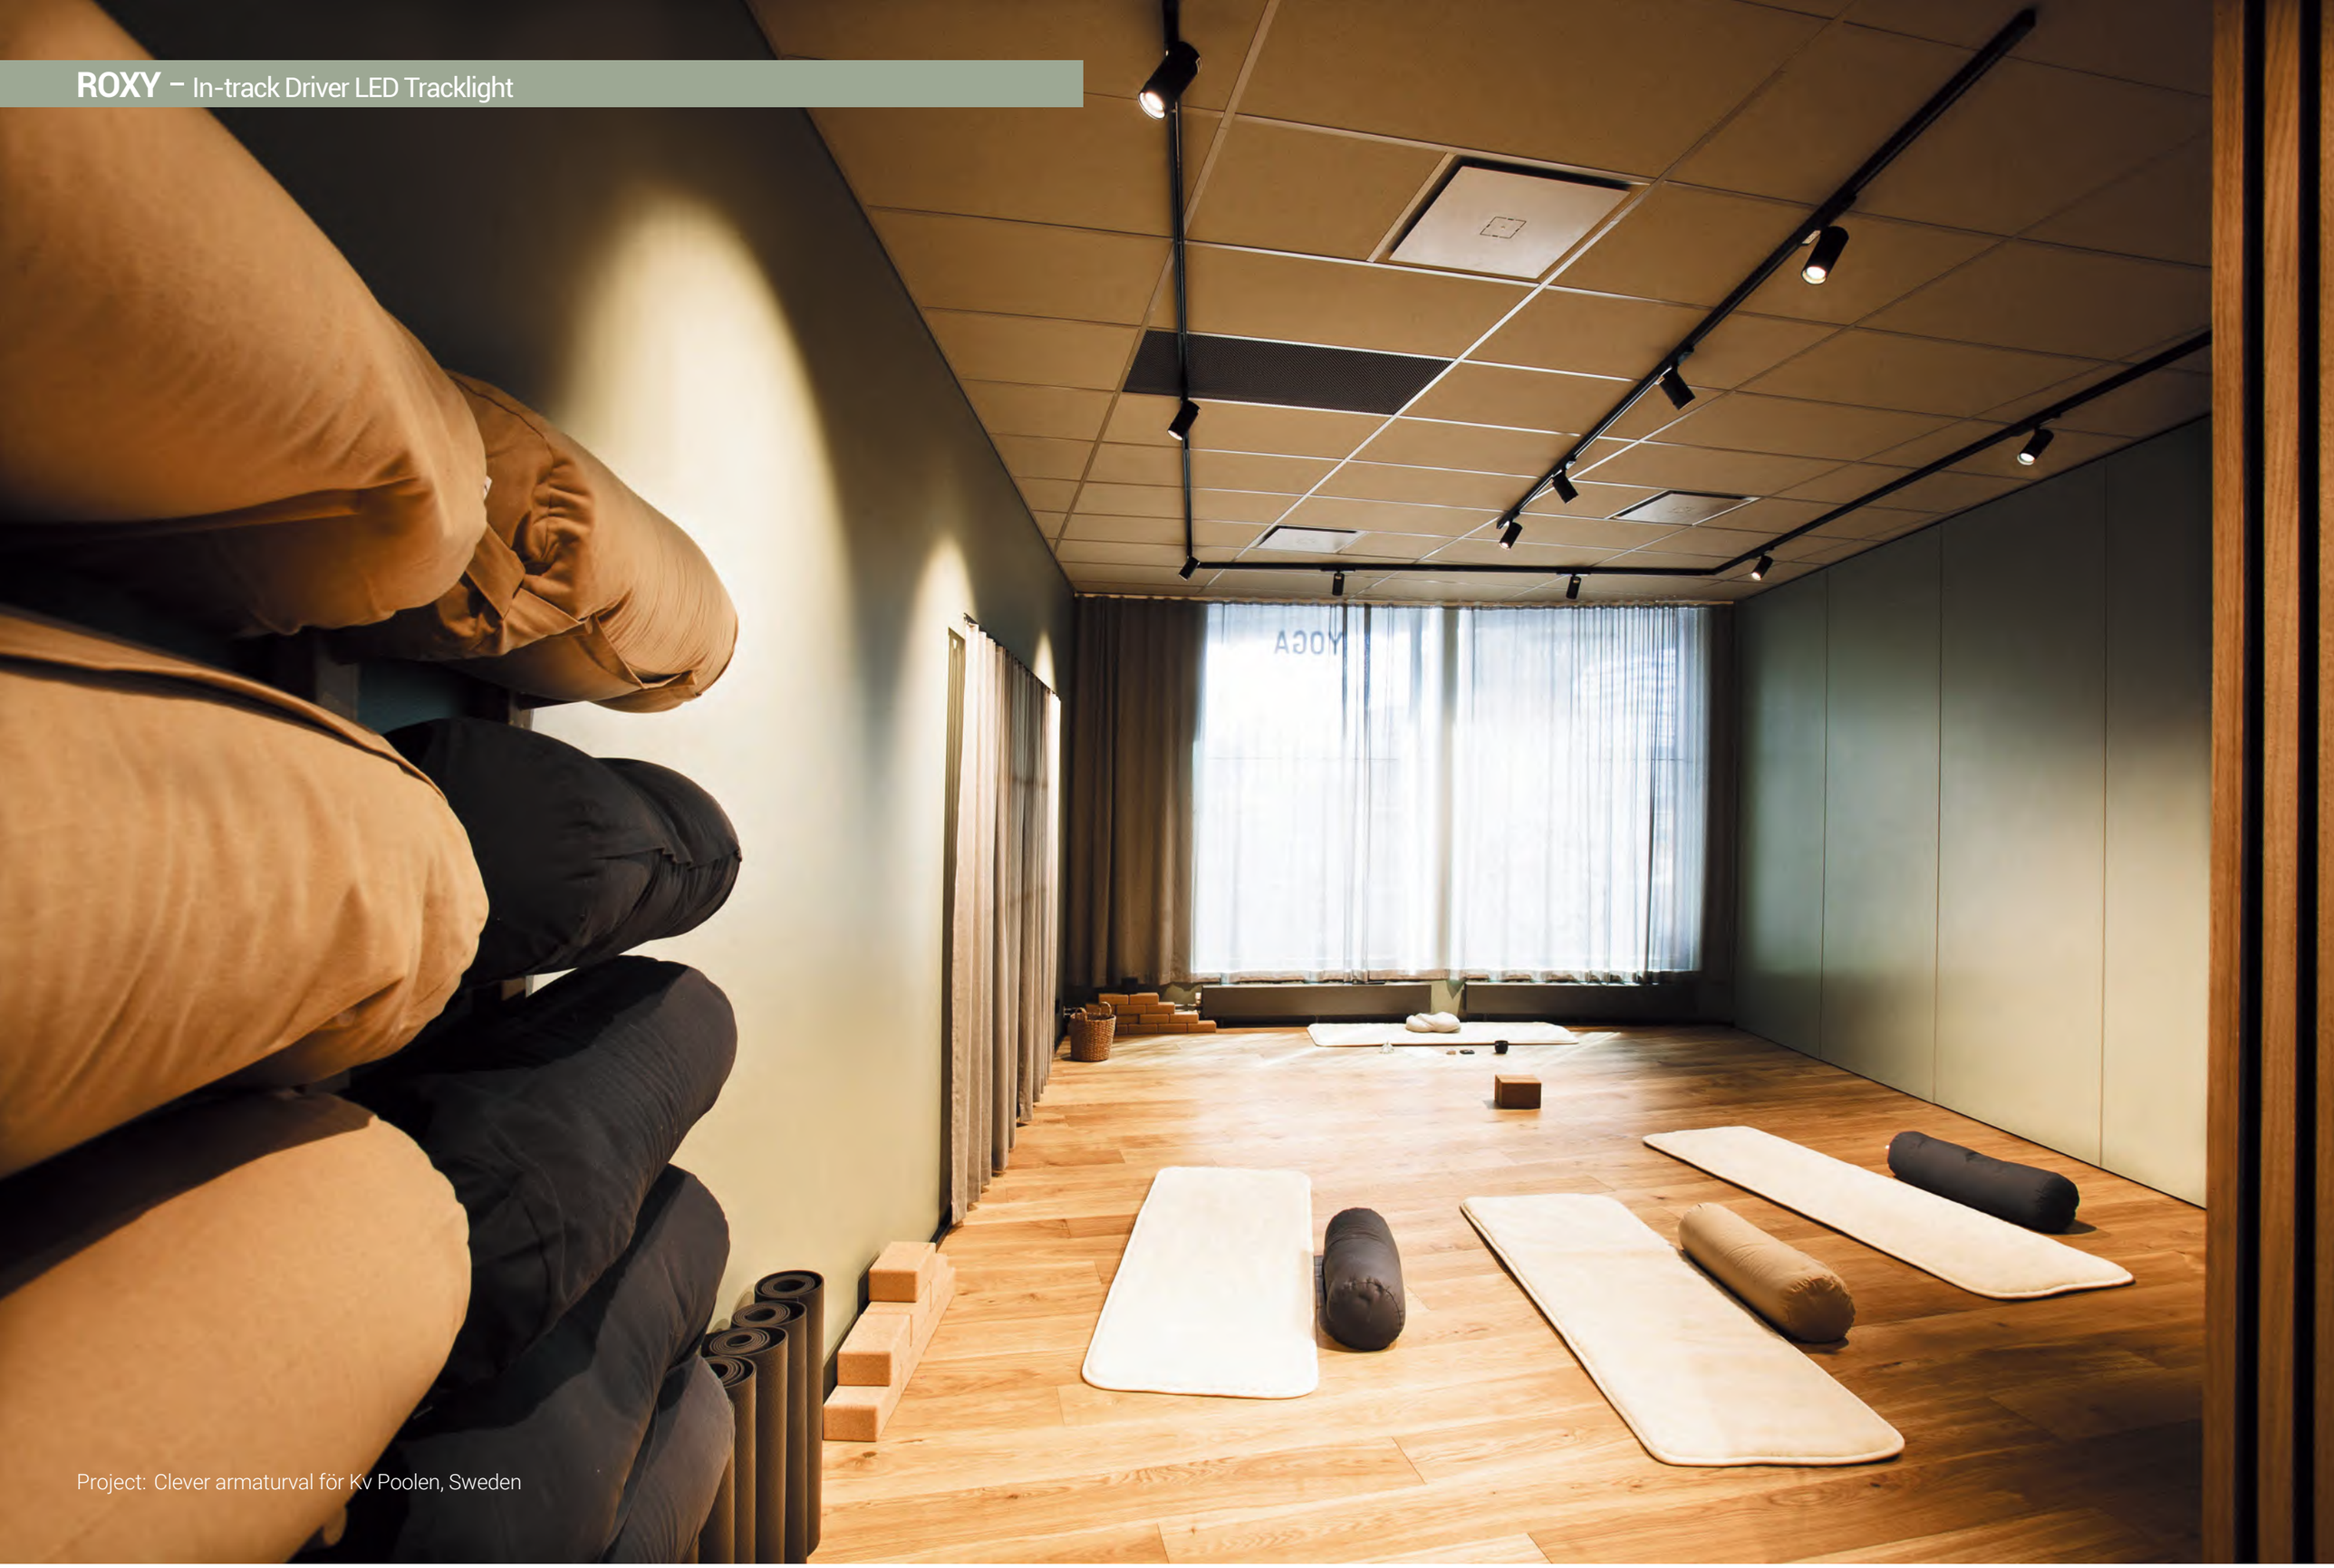

Project: Clever armaturval för Kv Poolen, Sweden

ROXY – In-track Driver LED Tracklight

Project: CMS LAW FIRM, Poland




ROXY Art – In-track Driver LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

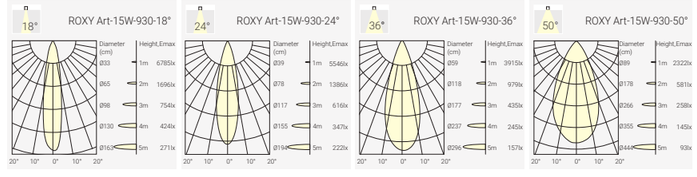

Finish



White Black

Order Info (ROYX Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	ROA1-9271815F-WB
						24°	1700lm	1150lm	ROA1-9272415F-WB
						36°	1700lm	1250lm	ROA1-9273615F-WB
						50°	1700lm	1350lm	ROA1-9275015F-WB
					3000K	18°	1800lm	1150lm	ROA1-9301815F-WB
						24°	1800lm	1200lm	ROA1-9302415F-WB
						36°	1800lm	1300lm	ROA1-9303615F-WB
						50°	1800lm	1400lm	ROA1-9305015F-WB
					4000K	18°	1900lm	1200lm	ROA1-9401815F-WB
						24°	1900lm	1250lm	ROA1-9402415F-WB
						36°	1900lm	1350lm	ROA1-9403615F-WB
						50°	1900lm	1450lm	ROA1-9405015F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Code for ROA1-9301815F-WB with Honeycomb
ROA1-9301815F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
ROA1 ROXY Art	927 CRI90/ 2700K	18 18°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	24 24°			B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					


ROXY Art – In-track Driver LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

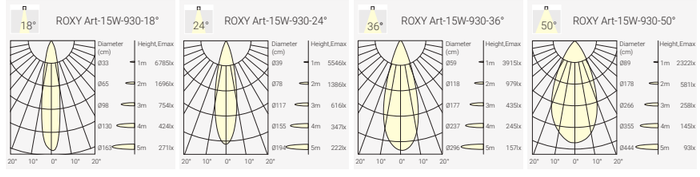

Finish



White Black

Order Info (ROYX Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	ROA1-9271815D-WB
						24°	1700lm	1150lm	ROA1-9272415D-WB
						36°	1700lm	1250lm	ROA1-9273615D-WB
						50°	1700lm	1350lm	ROA1-9275015D-WB
					3000K	18°	1800lm	1150lm	ROA1-9301815D-WB
						24°	1800lm	1200lm	ROA1-9302415D-WB
						36°	1800lm	1300lm	ROA1-9303615D-WB
						50°	1800lm	1400lm	ROA1-9305015D-WB
					4000K	18°	1900lm	1200lm	ROA1-9401815D-WB
						24°	1900lm	1250lm	ROA1-9402415D-WB
						36°	1900lm	1350lm	ROA1-9403615D-WB
						50°	1900lm	1450lm	ROA1-9405015D-WB

Code Remark: D=D(DALI Dim)

Optional accessary



Code for ROA1-9301815D-WB with Honeycomb
ROA1-9301815D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
ROA1 ROXY Art	927 CRI90/ 2700K	18 18°	15 15W	D DALI Dim	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	24 24°			B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

ROXY S – In-track Driver LED Tracklight




15° 30° 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

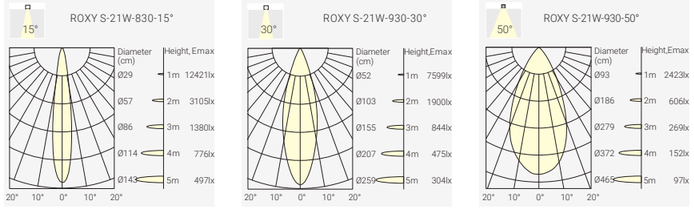

Finish



White Black

Order Info (ROYX S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1350lm	ROS1-9271515F-WB
						30°	1700lm	1650lm	ROS1-9273015F-WB
						50°	1700lm	1100lm	ROS1-9275015F-WB
					3000K	15°	1800lm	1400lm	ROS1-9301515F-WB
						30°	1800lm	1700lm	ROS1-9303015F-WB
						50°	1800lm	1150lm	ROS1-9305015F-WB
					4000K	15°	1900lm	1450lm	ROS1-9401515F-WB
						30°	1900lm	1800lm	ROS1-9403015F-WB
						50°	1900lm	1200lm	ROS1-9405015F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1800lm	ROS2-9271521F-WB
						30°	2400lm	2200lm	ROS2-9273021F-WB
						50°	2400lm	1600lm	ROS2-9275021F-WB
					3000K	15°	2500lm	1850lm	ROS2-9301512F-WB
						30°	2500lm	2300lm	ROS2-9303012F-WB
						50°	2500lm	1650lm	ROS2-9305021F-WB
					4000K	15°	2600lm	1900lm	ROS2-9401512F-WB
						30°	2600lm	2400lm	ROS2-9403012F-WB
						50°	2600lm	1700lm	ROS2-9405021F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Code for ROS1-9302515F-WB with Honeycomb ROS1-9302515F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
ROS1	**927**	**15**	**15**	**F**	**W**	**B**	**H**
ROXY S-15W	CRI90/ 2700K	15°	15W	On-Off	Wihte	Black	Honeycomb
ROS2	**930**	**30**	**21**		**B**		
ROXY S-21W	CRI90/3000K	30°	21W		Black		
	940	**50**					
	CRI90/ 4000K	50°					

ROXY S – In-track Driver LED Tracklight




15° 30° 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 DALI 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim



Light Distribution

3000K

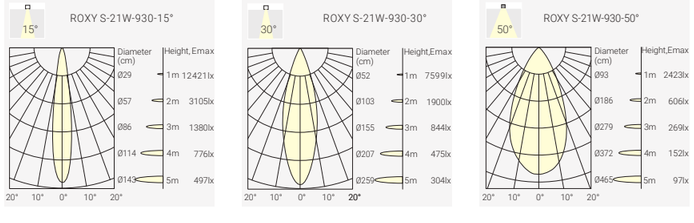

Finish



White Black

Order Info (ROYX S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1350lm	ROS1-9271515D-WB
						30°	1700lm	1650lm	ROS1-9273015D-WB
						50°	1700lm	1100lm	ROS1-9275015D-WB
					3000K	15°	1800lm	1400lm	ROS1-9301515D-WB
						30°	1800lm	1700lm	ROS1-9303015D-WB
						50°	1800lm	1150lm	ROS1-9305015D-WB
					4000K	15°	1900lm	1450lm	ROS1-9401515D-WB
						30°	1900lm	1800lm	ROS1-9403015D-WB
						50°	1900lm	1200lm	ROS1-9405015D-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1800lm	ROS2-9271521D-WB
						30°	2400lm	2200lm	ROS2-9273021D-WB
						50°	2400lm	1600lm	ROS2-9275021D-WB
					3000K	15°	2500lm	1850lm	ROS2-9301512D-WB
						30°	2500lm	2300lm	ROS2-9303012D-WB
						50°	2500lm	1650lm	ROS2-9305021D-WB
					4000K	15°	2600lm	1900lm	ROS2-9401512D-WB
						30°	2600lm	2400lm	ROS2-9403012D-WB
						50°	2600lm	1700lm	ROS2-9405021D-WB

Code Remark: D=D(DALI Dim)

Optional accessary



Code for ROS1-9302515D-WB with Honeycomb ROS1-9302515D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
ROS1	**927**	**15**	**15**	**D**	**W**	**B**	**H**
ROXY S-15W	CRI90/ 2700K	15°	15W	DALI Dim	Wihte	Black	Honeycomb
ROS2	**930**	**30**	**21**		**B**		
ROXY S-21W	CRI90/3000K	30°	21W		Black		
	940	**50**					
	CRI90/ 4000K	50°					

ROXY K – In-track Driver LED Tracklight




20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

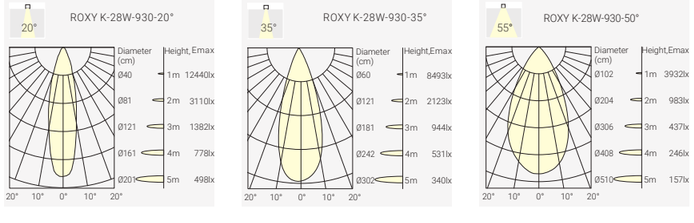

Finish



White Black

Order Info (ROYX K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	20°	3650lm	3000lm	ROK1-9272028F-WB
						35°	3650lm	3200lm	ROK1-9273528F-WB
						55°	3650lm	3050lm	ROK1-9275528F-WB
					3000K	15°	3800lm	3100lm	ROK1-9302028F-WB
						35°	3800lm	3300lm	ROK1-9303528F-WB
						55°	3800lm	3150lm	ROK1-9305528F-WB
					4000K	20°	3950lm	3200lm	ROK1-9402028F-WB
						35°	3950lm	3400lm	ROK1-9403528F-WB
						55°	3950lm	3250lm	ROK1-9405528F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROK1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
ROK1 ROXY K		927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	20 20° 35 35° 55 55°	28 28W	F On-Off		W Wihte B Black	B Black		H Honeycomb

ROXY K – In-track Driver LED Tracklight




20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 DALI 2 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim



Light Distribution

3000K

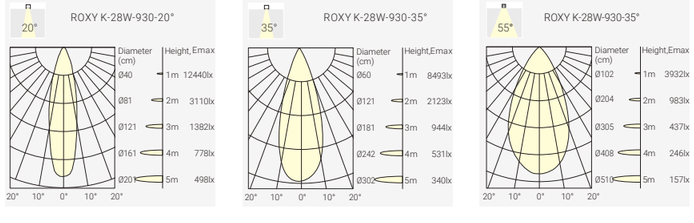

Finish



White Black

Order Info (ROYX K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	20°	3650lm	3000lm	ROK1-9272028D-WB
						35°	3650lm	3200lm	ROK1-9273528D-WB
						55°	3650lm	3050lm	ROK1-9275528D-WB
					3000K	15°	3800lm	3100lm	ROK1-9302028D-WB
						35°	3800lm	3300lm	ROK1-9303528D-WB
						55°	3800lm	3150lm	ROK1-9305528D-WB
					4000K	20°	3950lm	3200lm	ROK1-9402028D-WB
						35°	3950lm	3400lm	ROK1-9403528D-WB
						55°	3950lm	3250lm	ROK1-9405528D-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Code for ROK1-9303528D-WB with Honeycomb
ROK1-9303528D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System


Coding

ROK1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
ROK1 ROXY K		927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	20 20° 35 35° 55 55°	28 28W	D DALI Dim		W Wihte B Black	B Black		H Honeycomb

ROXY – In-track Driver LED Tracklight

Beam Angle Zooming Version



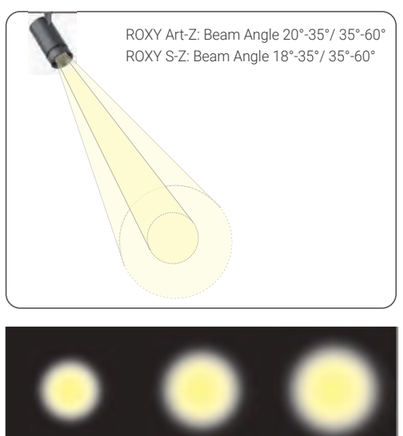



18°-60° Zooming

ROXY Art-Z

15W 1500lm-1600lm
20°-35° Zooming
35°-60° Zooming

ROXY S-Z

15W 1600lm-1700lm
21W 1200lm-2400lm
18°-35° Zooming
35°-60° Zooming



ROXY Art-Z – In-track Driver LED Tracklight





20°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°~35°, 35°~60°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K

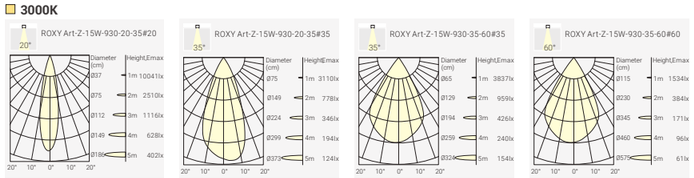

Order Info (ROYX Art-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°~35°	1700lm	1500lm	ROA1-927Z315F-WB
					3000K	20°~35°	1800lm	1550lm	ROA1-930Z315F-WB
					4000K	20°~35°	1900lm	1600lm	ROA1-940Z315F-WB
					2700K	35°~60°	1700lm	1350lm	ROA1-927Z615F-WB
					3000K	35°~60°	1800lm	1400lm	ROA1-930Z615F-WB
					4000K	35°~60°	1900lm	1450lm	ROA1-940Z615F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art-Z	927 CRI90/ 2700K	Z3 20°~35°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	Z6 35°~60°		D DALI Dim	B Black		
	940 CRI90/ 4000K						

Optional accessary



Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

ROXY S-Z – In-track Driver LED Tracklight





18°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°~35°, 35°~60°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K

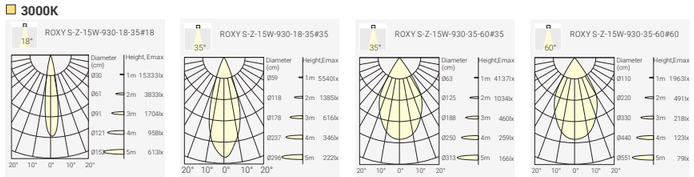

Order Info (ROXY S-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°~35°	1700lm	1600lm	ROS1-927Z315F-WB
					3000K	18°~35°	1800lm	1650lm	ROS1-930Z315F-WB
					4000K	18°~35°	1900lm	1700lm	ROS1-940Z315F-WB
					2700K	35°~60°	1700lm	1450lm	ROS1-927Z615F-WB
					3000K	35°~60°	1800lm	1500lm	ROS1-930Z615F-WB
					4000K	35°~60°	1900lm	1550lm	ROS1-940Z615F-WB
18W	21W	35V	500mA	90	2700K	18°~35°	2400lm	2200lm	ROS1-927Z321F-WB
					3000K	18°~35°	2500lm	2300lm	ROS1-930Z321F-WB
					4000K	18°~35°	2600lm	2400lm	ROS1-940Z321F-WB
					2700K	35°~60°	2400lm	1950lm	ROS1-927Z621F-WB
					3000K	35°~60°	2500lm	2000lm	ROS1-930Z621F-WB
					4000K	35°~60°	2600lm	2050lm	ROS1-940Z621F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-Z	927 CRI90/ 2700K	Z3 20°~35°	15 15W	F On-Off	W Wihte	B Black	H Honeycomb
	930 CRI90/3000K	Z6 35°~60°	21 21W	D DALI Dim	B Black		
	940 CRI90/ 4000K						

Optional accessary



Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

MISSION

High-Efficiency In-Track Driver LED Tracklight
Up to 130lm/W Luminous Efficiency
For Energy and Cost Savings



Project: Application reference

MISSION – In-track Driver LED Tracklight

Project: Application reference



MISSION S – In-track Driver LED Tracklight

New




20° 40° 60° 2700K 3000K 4000K CRI >90

IP20 CE bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- In-Track LED driver for simplified design
- High efficiency lighting solution
- Bridgelux LED: 17W, 28W; CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 60°
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

3000K

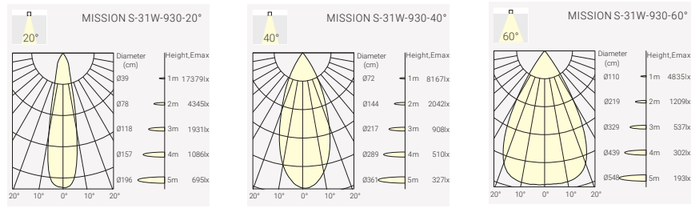

Finish



White

Black

Order Info (MISSION S in Black Housing & Black Ring as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	20°	2800lm	2400lm	MIS1-9272019F-BB
						40°	2800lm	2400lm	MIS1-9274019F-BB
						60°	2800lm	2400lm	MIS1-9276019F-BB
					3000K	20°	2900lm	2500lm	MIS1-9302019F-BB
						40°	2900lm	2500lm	MIS1-9304019F-BB
						60°	2900lm	2500lm	MIS1-9306019F-BB
					4000K	20°	3000lm	2600lm	MIS1-9402019F-BB
						40°	3000lm	2600lm	MIS1-9404019F-BB
						60°	3000lm	2600lm	MIS1-9406019F-BB
28W	31W	35V	800mA	90	2700K	20°	4400lm	3800lm	MIS2-9272031F-BB
						40°	4400lm	3800lm	MIS2-9274031F-BB
						60°	4400lm	3800lm	MIS2-9276031F-BB
					3000K	20°	4500lm	4000lm	MIS2-9302031F-BB
						40°	4500lm	4000lm	MIS2-9304031F-BB
						60°	4500lm	4000lm	MIS2-9306031F-BB
					4000K	20°	4600lm	4100lm	MIS2-9402031F-BB
						40°	4600lm	4100lm	MIS2-9404031F-BB
						60°	4600lm	4100lm	MIS2-9406031F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Track System



3-Circuits

Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

MIS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Ring Color	Accessory
MIS1 MISSION S-19W	**927** CRI90/ 2700K	**20** 20°	**19** 19W	**F** On-Off	**W** White	**W** White	
MIS2 MISSION S-31W	**930** CRI90/ 3000K	**40** 40°	**31** 31W	**D** DALI Dim	**B** Black	**B** Black	
	940 CRI90/ 3000K	**60** 60°					



Project: Application reference

DASH Smart

The Modular Design
3-phase Linear Tracklight

Ecodesign for Sustainable Products
Replaceability of light sources and
separated control

-Linear Accent Light in Chrome-black
or Specular reflector
-80° beam angle and UGR<19
-Uniform illumination and visual comfort

-Linear General Light within micro-
prismatic cover, to ensure maximum
homogeneous lighting

-Lumen output adjustable via dip switch
on LED driver (ON-OFF or DALI Dim)
-Lumen efficiency up to 140lm/W



Project: Office Project in Hunxe, Germany

DASH SMART – The Modular Design 3-phase Linear Tracklight







3-phase Track System

Global
Stucchi
Powergear

Linear Accent Light

80° beam angle, UGR<19
Uniform illumination and visual comfort
Reflector in Chrome Black or Specular
Housing color in Black or White
Lumen efficiency up to 140lm/W

Linear General Light

Within micro-prismatic cover,
to ensure homogeneous lighting
Housing color in Black or White
Lumen efficiency up to 120lm/W

In-Track LED Driver and Lamp Holder

DASH Smart 50W in-Track LED Driver (ON-OFF or DALI Dim)

·Dimension: 672mm x 13.8mm (31mm) x 31.5mm
·Maximum Secondary Power: 50.4W
·Output Voltage Range: 24-48V; Maximum Output Voltage: 60V
·Input Voltage: 220-240V~50/60Hz; Overvoltage Resistance: 320V, 1h
·Inrush current: 20A, 280μs
·Automatic Circuit Breaker: 22pcs on B16A, 37pcs on C16A

① Adjustable Output Current between 350-1050mA via DIP Switch
② L1, L2 and L3 phase switchable
③ Lamp Holder within GR6d Retaining Element for 3-phase Power Rails with Locking Mechanism

Project: Office Project in Hunxe, Germany

DASH SMART – The Modular Design 3-phase Linear Tracklight



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 140lm/W
- LED Driver: ON-OFF or DALI Dim



Light Distribution

3000K



Color Options



Black-Chrome Black | Black-Specular | White-Specular

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSD26-L090-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
1164mm	DSD26-L120-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
1464mm	DSD26-L150-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
		@1050 mA	50 W	80	3000K	80°	7250lm
					4000K	80°	7500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSD26-L*** – *** | ** | * | * – | * | *

Model	CRI/ CCT	Beam Angle	Control	Housing Finish	Reflector Color
DSD26-L090 DSD26 864mm	**830** CRI80/ 3000K	**80** 80°	**N** No Driver	**W** White	**C** Chrome Black
DSD26-L120 DSD26 1164mm	**840** CRI80/ 4000K		**F** On-Off	**B** Black	**S** Specular
DSD26-L150 DSD26 1464mm			**D** DALI Dim		


DASH SMART – The Modular Design 3-phase Linear Tracklight



90° | 3000K 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Housing color in White or Black
- General Light in Microprismatic Cover
- 90° beam angle, homogeneous lighting
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 120lm/W
- LED Driver: ON-OFF or DALI Dim




Light Distribution

3000K



Color Options



Black | White

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSO26-L090-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
1164mm	DSO26-L120-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
1464mm	DSO26-L150-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
		@1050 mA	50 W	80	3000K	90°	5000lm
					4000K	90°	5500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSO26-L*** – *** | ** | * | * – | * | *

Model	CRI/ CCT	Beam Angle	Control	Trim Finish	Reflector Color
DSO26-L090 DSO26 864mm	**830** CRI80/ 3000K	**90** 90°	**N** No Driver	**W** White	**N** None
DSO26-L120 DSO26 1164mm	**840** CRI80/ 4000K		**F** On-Off	**B** Black	
DSO26-L150 DSO26 1464mm			**D** DALI Dim		

INLINE

Single Phase LED Tracklight System

Incl. Phase Dim Driver

Direct Connection 230V – No External Driver



INLINE – Single Phase LED Tracklight System

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver



INLINE ST-11W
11W, 36°, 700lm at CRI>90 2700K



INLINE SP-8W
8W, 36°, 500lm at CRI>90 2700K


INLINE – Single Phase LED Tracklight System



36° | 2700K | CRI >90 | UGR<19 | IP20 | CE | LUMINUS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMINUS LED: 9W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White


Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-WB
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-BB

Code Remark: P=P(Phase Dim)

Track System




Compatible with NEKO INLINE Single Circuit Track System



36° | 2700K | CRI >90 | UGR<19 | IP20 | CE | LUMINUS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMINUS LED: 6W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White




Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-WB
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-BB


Code Remark: P=P(Phase Dim)

Track System




Compatible with NEKO INLINE Single Circuit Track System

INLINE – Single Phase LED Tracklight System

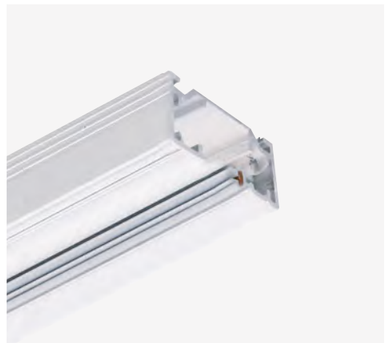


Quick Info

- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available forbuilding comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted




Load of Track




Connection Diagram


Example A:

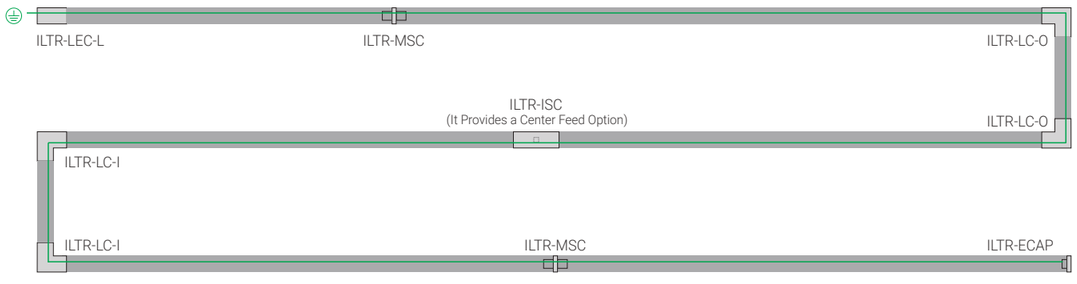

Example B:

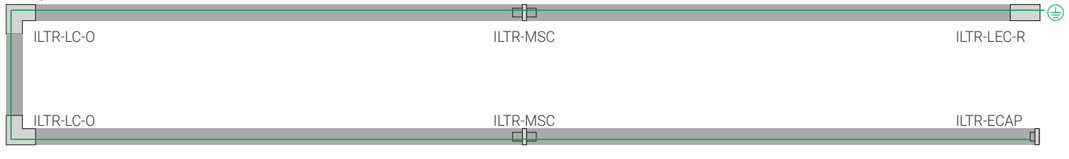






INLINE Single Phase Track

Description	Code/Model
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-W
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B






Live End Connector

Description	Code/Model
Live End Connector, Left, White	ILTR-LEC-L-W
Live End Connector, Left, Black	ILTR-LEC-L-B
Live End Connector, Right, White	ILTR-LEC-R-W
Live End Connector, Right, Black	ILTR-LEC-R-B






I Straight Connector

Description	Code/Model
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B






L Connector

Description	Code/Model
L Connector, Outer, White	ILTR-LC-O-W
L Connector, Outer, Black	ILTR-LC-O-B
L Connector, Inner, White	ILTR-LC-I-W
L Connector, Inner, Black	ILTR-LC-I-B






Mini Straight Connector

Description	Code/Model
Mini Straight Connector, White	ILTR-MSC-W
Mini Straight Connector, Black	ILTR-MSC-B





Endcap

Description	Code/Model
Endcap, White	ILTR-ECAP-W
Endcap, Black	ILTR-ECAP-B

SPIN

Dual-Emission Wall Light

Convex Lens without Rainbow-Edge Effect

355° Rotatable Head for Flexible

Electroplated Finish in Refined Metallic Tones



SPIN – Wall Light


New



90° 90° | 3000K | CRI >90 | IP20 | CE | LUMINUS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting
- LUMINUS LED: 5W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 510lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Champagne Black(CB)



Brushed Nickel(BN)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
5W	6W	36V	150mA	90	3000K	90°	510lm	SPIN-9309006F-CB SPIN-9309006F-BN SPIN-9309006P-CB SPIN-9309006P-BN SPIN-9309006D-CB SPIN-9309006D-BN

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

SPIN	–	**	**	**	*	–	**	–	
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
SPIN SPIN		**930** CRI90/ 3000K	**90** 90°	**06** 6W	**F** On-Off **P** Phase Dim **D** DALI Dim		**CB** Chrome Black **BN** Brushed Nickel		



Project: Application reference

LED Strip Light

SL2835A, Standard LED Strip Light

SL2835B, High Efficiency LED Strip Light


SL5050C, RGBW LED Strip Light

SL2835D, FCOB LED Strip Light

Modeling:

SL 2835 A - 24 - 120 - 12W - 65

- Range: SL (Strip Light)
- LED: 2835 5050
- Series: A B C D
- Input Voltage(V): DC24
- LED QTY/M: 60 70 120 140 304 308 420
- Typical Wattage(W/m): 6 9 10 12 14 19 24
- IP Rating: IP20 IP54 IP65

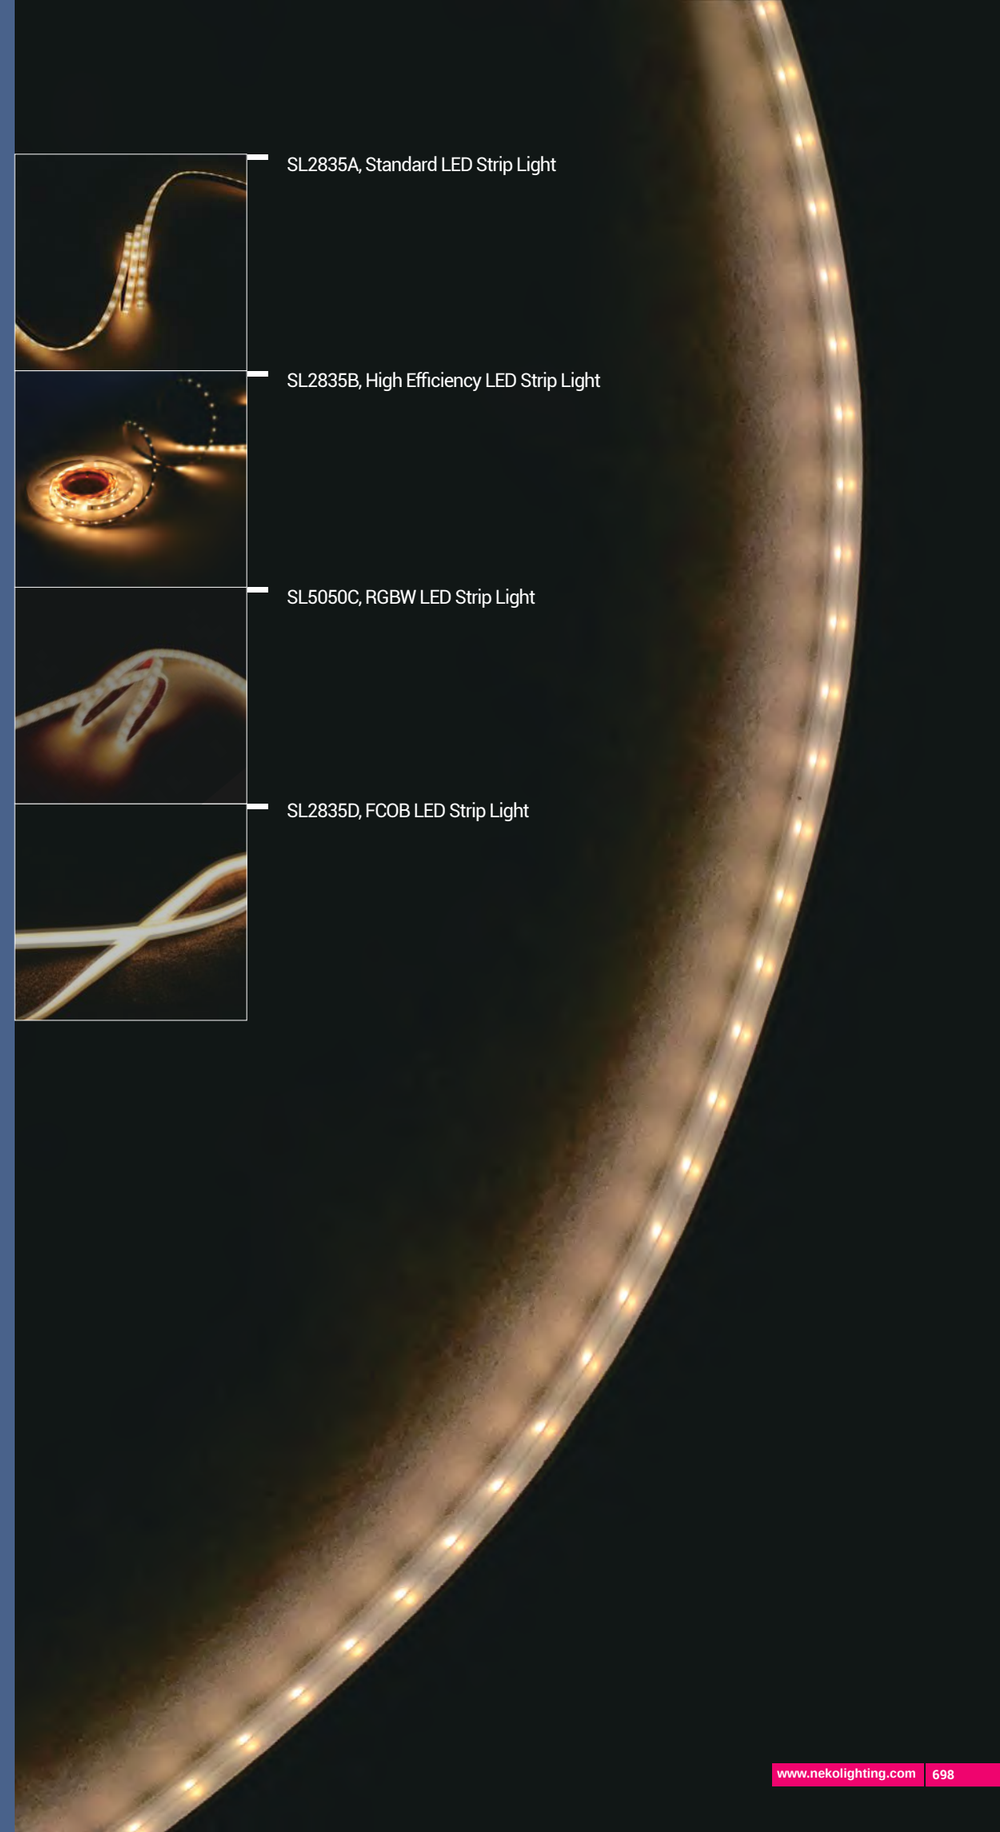

LED Strip Light

NEW

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
SL2835A, Standard LED Strip Light														
SL2835A	SL2835A-24-060-6W-20	DC24	60	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8	5	6 LEDS	100	600	100	5 yrs
	SL2835A-24-060-9W-20	DC24	60	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8	5	6 LEDS	100	900	100	5 yrs
	SL2835A-24-120-6W-20	DC24	120	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8	5	6 LEDS	50	600	100	5 yrs
	SL2835A-24-120-9W-20	DC24	120	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8	5	6 LEDS	50	900	100	5 yrs
	SL2835A-24-120-12W-20	DC24	120	12	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8	5	6 LEDS	50	1200	100	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
SL2835B, High Efficiency LED Strip Light														
SL2835B	SL2835B-24-070-6W-20	DC24	70	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	100	660	110	5 yrs
	SL2835B-24-070-9W-20	DC24	70	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	100	990	110	5 yrs
	SL2835B-24-140-6W-20	DC24	140	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	50	660	110	5 yrs
	SL2835B-24-140-9W-20	DC24	140	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	50	990	110	5 yrs
	SL2835B-24-140-12W-20	DC24	140	12	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	50	1320	110	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
SL5050C, RGBW LED Strip Light														
SL5050C	SL5050C-24-060-12W-20	DC24	60	12	IP20/IP65	R G B W	>80	10	5	6 LEDS	100	270lm for White	90	3 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
SL2835D, FCOB LED Strip Light														
SL2835D	SL2835D-24-308-10W-54	DC24	308	10	IP54	2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	22.7	1330	95	3 yrs
	SL2835D-24-308-14W-54	DC24	308	14	IP54	2700K 3000K 3500K 4000K 5000K	>90	10	5	7 LEDS	22.7	2280	95	3 yrs
	SL2835D-24-304-14W-54	DC24	304	14	IP54	2700K 3000K 3500K 4000K 5000K	>90	10	5	8 LEDS	26.3	2280	118	3 yrs
	SL2835D-24-304-19W-54	DC24	304	19	IP54	2700K 3000K 3500K 4000K 5000K	>90	10	5	8 LEDS	26.3	2280	118	3 yrs
	SL2835D-24-304-24W-54	DC24	304	24	IP54	2700K 3000K 3500K 4000K 5000K	>90	10	5	8 LEDS	26.3	2830	118	3 yrs

SL2835A – Standard LED Strip Light

NEW



SL2835A


- Standard version flexible LED strip light;
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Easy installation featuring 3M VHB adhesive backing
- Top lighting and top bending
- L70B50@50,000 hours




IP20



IP65







120° | CE | CRI >90 | 24V DC | 5M REEL

Technical Specification (IP20 Version)					
Model No.	SL2835A-24-060-6W-20	SL2835A-24-060-9W-20	SL2835A-24-120-6W-20	SL2835A-24-120-9W-20	SL2835A-24-120-12W-20
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY	60/M	60/M	120/M	120/M	120/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP20	IP20	IP20	IP20	IP20
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	8mm	8mm	8mm	8mm	8mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS	6 LEDS	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @4000K	600	900	600	900	1200
Lm/W	100	100	100	100	100
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs
Technical Specification (IP65 Version)					
Model No.	SL2835A-24-060-6W-65	SL2835A-24-060-9W-65	SL2835A-24-120-6W-65	SL2835A-24-120-9W-65	SL2835A-24-120-12W-65
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY/M	60/M	60/M	120/M	120/M	120/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP65	IP65	IP65	IP65	IP65
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS	6 LEDS	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @4000K	540	810	540	810	1080
Lm/W	90	90	90	90	90
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs


Recommended Accessories




AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips



3M Tape

Ordering Code

SL2835A	–	24	–	060	–	6W	–	20	–	2000K	–	*

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835A	24 DC24V	060 60pcs 120 120pcs	6W 9W 12W	20 IP20 65 IP65	2200K 2700K 3000K 3500K 4000K 5000K	3M Tape Clips AL Profile 45° AL Profile

SL2835B – High Efficiency LED Strip Light


NEW




SL2835B

- High efficiency LED strip light
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Semi-transparent silicone extrusion for IP65 with salt-mist proof
- Top lighting and top bending
- L70B50@50,000 hours









120° | CE | CRI >90 | 24V DC | 5M REEL

Technical Specification (IP20 Version)					
Model No.	SL2835B-24-070-6W-20	SL2835B-24-070-9W-20	SL2835B-24-140-6W-20	SL2835B-24-140-9W-20	SL2835B-24-140-12W-20
Input Voltage(V)	DC24	DC24	DC36	DC24	DC24
LED QTY	70/M	70/M	140/M	140/M	140/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP20	IP20	IP20	IP20	IP20
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	7 LEDS	7 LEDS	7 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @4000K	660	990	660	990	1320
Lm/W	110	110	110	110	110
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs
Technical Specification (IP65 Version)					
Model No.	SL2835B-24-070-6W-65	SL2835B-24-070-9W-65	SL2835B-24-140-6W-65	SL2835B-24-140-9W-65	SL2835B-24-140-12W-65
Input Voltage(V)	Dc24	DC24	DC24	DC24	DC24
LED QTY/M	70/M	70/M	140/M	140/M	140/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP65	IP65	IP65	IP65	IP65
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	12mm	12mm	12mm	12mm	12mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	7 LEDS	7 LEDS	7 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @4000K	600	900	600	600	1200
Lm/W	100	100	100	100	100
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs


Recommended Accessories



AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips



3M Tape

Ordering Code

SL2835B – 24 – 060 – 6W – 20 – 2000K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835B	24 DC24V	070 70pcs 140 140pcs	6W 9W 12W	20 IP20 65 IP65	2200K 2700K 3000K 3500K 4000K 5000K	3M Tape Clips AL Profile 45° AL Profile

SL5050C – RGBW LED Strip Light

NEW




SL5050C

- RGBW colorful flexible LED strip light;
- Widely adaptable to all types of dimming and toning controller
- Color rendering index (CRI): Ra>90
- High quality FPC, high thermal 3M adhesive
- Top lighting and top bending
- L70B50@50,000 hours;


IP20



IP65

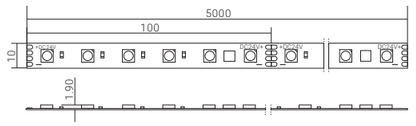


120° | CE | CRI >90 | 24V DC | 6M REEL | 60 LEDs/M

Technical Specification		
Version	IP20 Version	IP65 Version
Model No.	SL5050C-24-060-12W-20	SL5050C-24-060-12W-65
Input Voltage(V)	DC24	DC24
LED QTY	60/M	60/M
Typical Wattage	12W/M	12W/M
IP Rating	IP20	IP65
CRI	Ra>80	Ra>80
CCT	RGBW	
Width	10mm	12mm
Length	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm
Lm/M @4000K	270lm for White	270lm for White
Lm/W	100	90
ERP	A+	A+
Warranty	3 yrs	3 yrs


Recommended Accessories



AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips


3M Tape

Ordering Code

SL5050C – 24 – 060 – 12W – 20 – 2000K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835B	24 DC24V	060 60pcs	6W	20 IP20 65 IP65	R G B W	3M Tape Clips AL Profile 45° AL Profile




SL2835D – FCOB LED Strip Light


NEW

SL2835D

- Ultra-thin design with super flexible bending performance
- Seamless COB design that eliminates virtually all LED dotting
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Easy installation featuring 3M VHB adhesive backing
- Available in silicone glue IP54 rating for indoor outdoor locations
- L70B50@50,000 hours








120° | CE | CRI >90 | 24V DC | 5M REEL


Technical Specification (IP54 Version)				
Model No.	SL2835D-24-308-10W-54	SL2835D-24-308-14W-54	SL2835D-24-304-14W-54	SL2835D-24-304-19W-54
Input Voltage(V)	DC24	DC24	DC36	DC24
LED QTY	308/M	308/M	304/M	304/M
Typical Wattage	10W/M	14W/M	14W/M	19W/M
IP Rating	IP54	IP54	IP54	IP54
CRI	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2700K/3000K/3500K/4000K/5000K			
Width	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	8 LEDS	8 LEDS
Min. cutting length	22.7mm	22.7mm	26.3mm	26.3mm
Lm/M @4000K	1000	1330	1720	2280
Lm/W	95	95	118	118
ERP	A+	A+	A+	A+
Warranty	3 yrs	3 yrs	3 yrs	3 yrs

Technical Specification (IP54 Version)	
Model No.	SL2835D-24-304-24W-54
Input Voltage(V)	DC24
LED QTY	304/M
Typical Wattage	24W/M
IP Rating	IP54
CRI	Ra>90
CCT	2700K/3000K/3500K/4000K/5000K
Width	10mm
Length	5M
Min. cutting length	8 LEDS
Min. cutting length	26.3mm
Lm/M @4000K	2830
Lm/W	118
ERP	A+
Warranty	3 yrs

Recommended Accessories




AL Profile (to be ordered separately)




45° AL Profile (to be ordered separately)



3M Tape





Ordering Code

SL2835D – 24 – 304 – 10W – 54 – 2700K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835D	24 DC24V	304 304pcs 308 308pcs 420 420pcs	10W 19W 24W	54 IP54	2700K 3000K 3500K 4000K 5000K	3M Tape AL Profile 45° AL Profile

LED Neon Flex

NF1717T, 16.5*16.5mm Top Bending LED Neon Flex

NF0817S, 8*16.5mm Side Bending LED Neon Flex


NF1221S, 11.5*21mm Side Bending LED Neon Flex

NF1228S, 11.5*28mm Side Bending LED Neon Flex

Modeling:

NF 1717 T - 24 - 120 - 9W - 68

- Range: NF (Neon Flex)
- Section Size(mm): 1717 (16.5*16.5mm); 0817 (08*16.5mm); 1221 (11.5*21mm); 1228 (11.5*28mm)
- Bending Direction: T Top Bending; S Side Bending
- Input Voltage(V): Dc24
- LED QTY/M: 60 70 72 84 120 144
- Typical Wattage(W/M): 5 7.2 9 10 12 15
- IP Rating: IP68

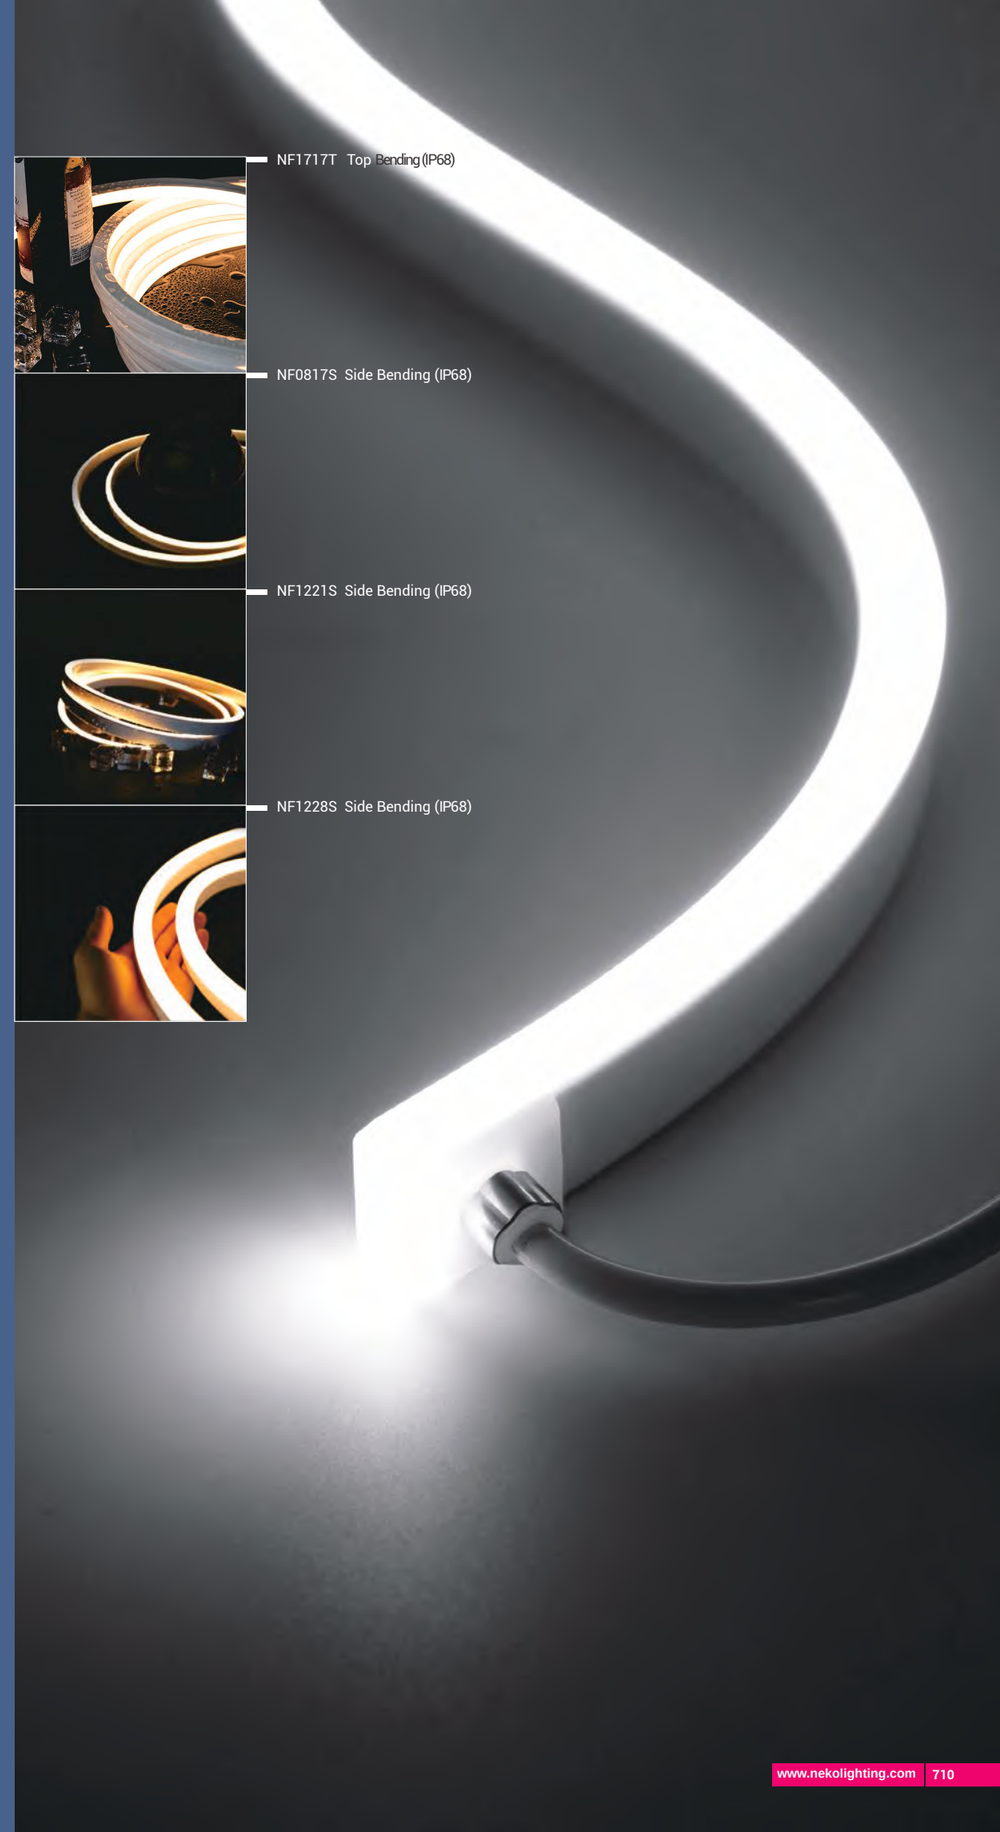

LED Neon Flex

NEW

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
Top Bending (IP68)														
NF1717T	NF1717T-24-120-9W	DC24	120	9	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	16.5*16.5	>90	10	20	12 LEDS	100	>340	37	3 yrs
	NF1717T-24-144-10W	DC24	144	10	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	16.5*16.5	>90	10	20	12 LEDS	83.3	>370	37	3 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF0817S	NF0817S-24-070-5W	DC24	70	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	08*16.5	>90	10	20	7 LEDS	100	>120	24	3 yrs
	NF0817S-24-120-10W	DC24	120	10	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	08*16.5	>90	10	20	12 LEDS	100	>120	12	3 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF1221S	NF1221S-24-072-13W	DC24	72	13	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*21	>90	8	16	6 LEDS	83.3	>380	25	3 yrs
	NF1221S-24-060-12W	DC24	60	12	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*21	>90	10	20	6 LEDS	100	>330	27	3 yrs
	NF1221S-24-060-7.2W	DC24	60	7.2	R A O	11.5*21	>90	15	30	10 LEDS	166.7	/	N/A	3 yrs
	NF1221S-24-072-5W	DC24	72	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	11.5*21	>90	15	30	12 LEDS	166.7	>130	26	3 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min.cutting unit	Min.cutting length (mm)	lm/M @4000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF1228S	NF1228S-24-072-13W	DC24	72	13	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*28	>90	8	16	6 LEDS	83.3	>340	22	3 yrs
	NF1228S-24-060-12W	DC24	60	12	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*28	>90	10	20	6 LEDS	100	>300	27	3 yrs
	NF1228S-24-060-7.2W	DC24	60	7.2	R A O	11.5*28	>90	15	30	10 LEDS	166.7	/	N/A	3 yrs
	NF1228S-24-072-5W	DC24	72	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	11.5*28	>90	15	30	12 LEDS	166.7	>120	24	3 yrs

NF1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex

NEW





NF1717T

- Flat surface with 120 degree beam angle
- Top bending with uniform and even light output
- High lumen output, up to 400lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 20M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification		
Model	NF1717T-24-120-9W	NF1717T-24-144-10W
Operating voltage	DC24	DC24
Power consumption	9W/M	10W/M
Working Mode	CV	CV
LED type	SMD3528	SMD3528
CRI	Ra>90	Ra>90
Section Size	16.5*16.5mm	16.5*16.5mm
LED Quantity	120pcs/M	144pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K	
Available Color	R/G/B/P/A/O	R/G/B/P/A/O
Min. cutting Unit	12 LEDS	12 LEDS
Min. cutting length	100mm	83.3mm
Max. length single feed	10M	10M
Max. length double feed	20M	20M
Photo-electric Parameters		
Model	NF1717T-24-120-9W	NF1717T-24-144-10W
CCT	LM/M	LM/M
R	>110lm	>120lm
G	>360lm	>390lm
B	>54lm	>60lm
A	>80lm	>90lm
O	>70lm	>80lm
P	>320lm	>360lm
LY	>340lm	/
2200K	>330lm	>360lm
2700K	>330lm	>360lm
3000K	>330lm	>360lm
3500K	>340lm	>370lm
4000K	>340lm	>370lm
5000K	>360lm	>400lm

Ordering Code

NF1717T – 24 120 – 9W – 2.2K – S – 01 – SM


Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color		Connector entry type		Connector direction		Cable connector type	
NF1717T	24 DC24V	120 120pcs 144 144pcs	9W 10W	2200K	2.2K	Side entry	S	Right	01	Male connetor cable	SM
				2700K	2.7K	Direct entry	D	Left	02	Female connector cable	SF
				3000K	3K	Bottom entry	B	Double	03	Male & female connector cable	SMF
				3500K	3.5K					Bare wire	Blank
				4000K	4K						
				5000K	5K						
				Red	R						
				Green	G						
				Blue	B						
				Amber	A						
				Orange	O						
				Pink	P						
				Lemon Yellow	LY						

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)

NF1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex


NEW

Construction

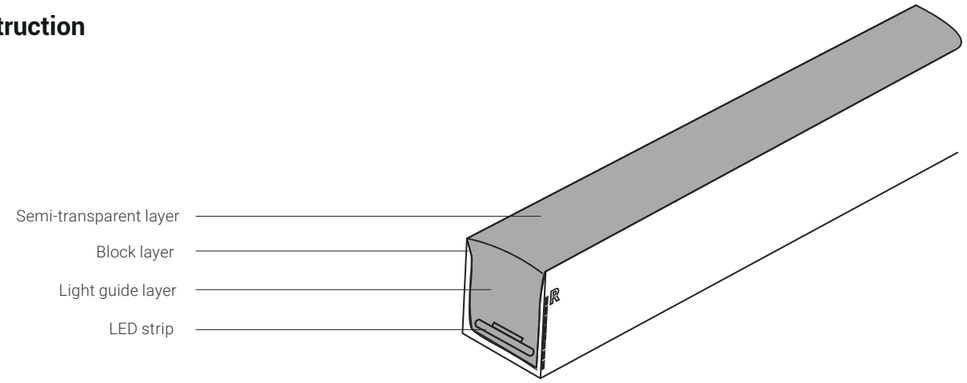


Physical Specification


Light profile

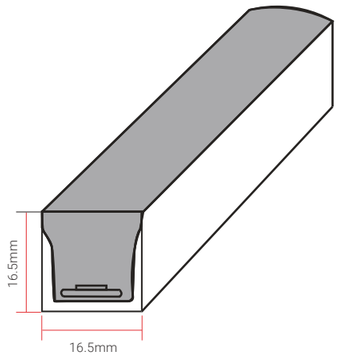


Bending direction

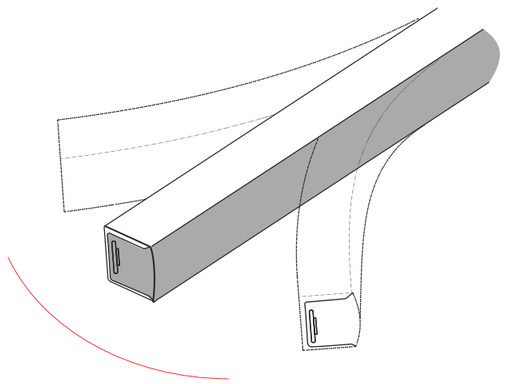


Min. bending diameter

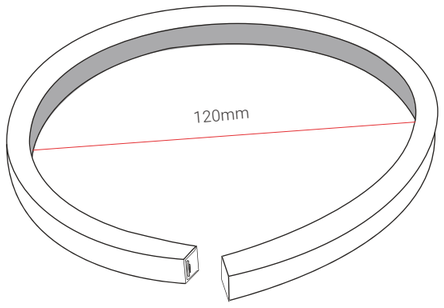

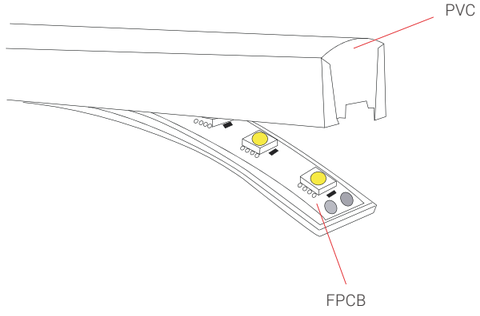


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-1717-A-D01
② MJ-1717-A-D01SM
③ MJ-1717-A-D02
④ MJ-1717-A-D02SF
⑤ MJ-1717-A-D03
⑥ MJ-1717-A-D03SMF




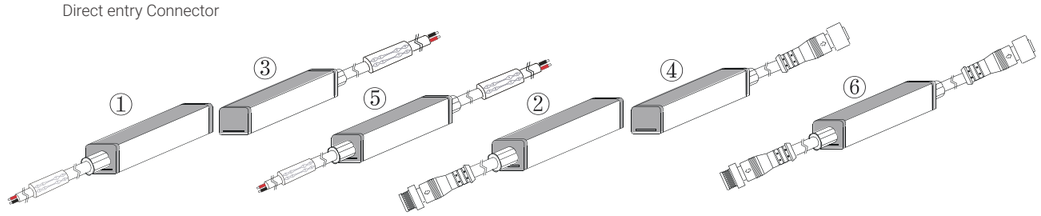





Side entry Connector

① MJ-1717-A-S01
② MJ-1717-A-S01SM
③ MJ-1717-A-S02
④ MJ-1717-A-S02SF
⑤ MJ-1717-A-S03
⑥ MJ-1717-A-S03SMF




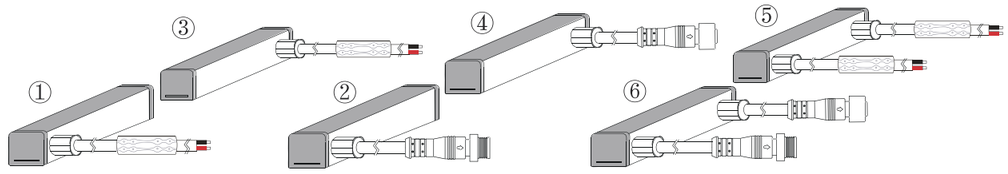




Bottom entry Connector

① MJ-1717-A-B01
② MJ-1717-A-B01SM
③ MJ-1717-A-B02
④ MJ-1717-A-B02SF
⑤ MJ-1717-A-B03
⑥ MJ-1717-A-B03SMF

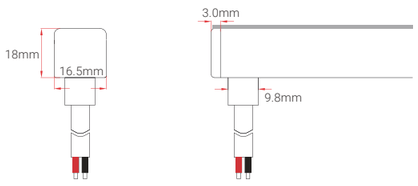

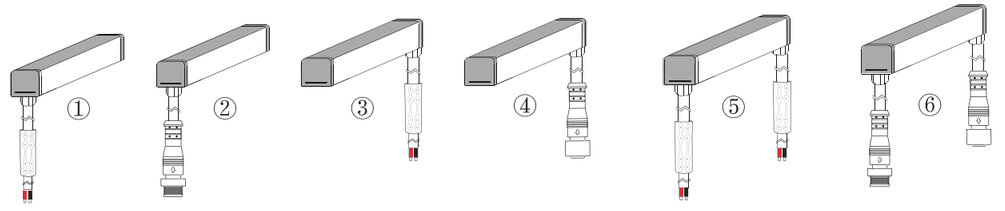


NF1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex


NEW

Mould injection connector

(IP68 Factory Assembly only)




① MJ-1717-A-L01
② MJ-1717-A-L01SM
③ MJ-1717-A-L03
④ MJ-1717-A-L03SMF

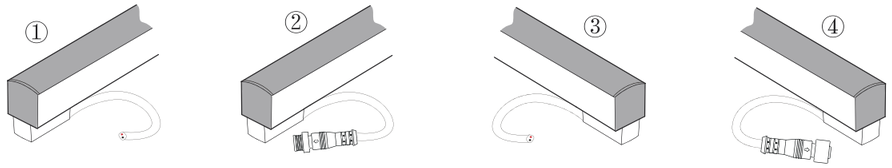


Mould injection Jumper

(IP68 Factory Assembly only)

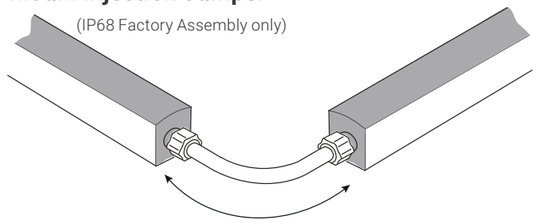

0.3m cable length


DIY snap splice connector (IP67 Only)



Model: DIY-SN-SP-1717-A


DIY Screw & Snap connector Kit (IP67 Only)

DIY screw splice connector kit

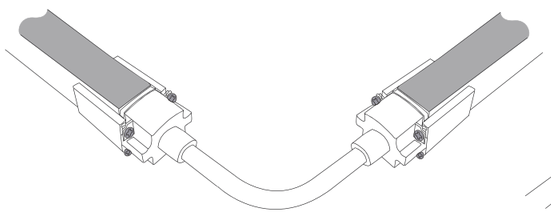


Model: DIY-SC-FR-1717-D-01-A (Right)
DIY-SC-FR-1717-D-02-A (Left)

DIY screw connector & End cap kit

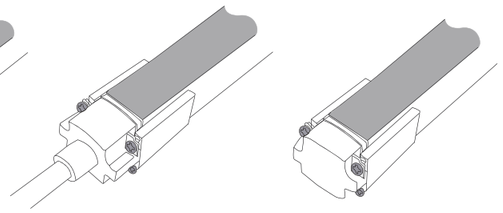


Model: DIY-SC-END-1717

DIY snap splice connector kit

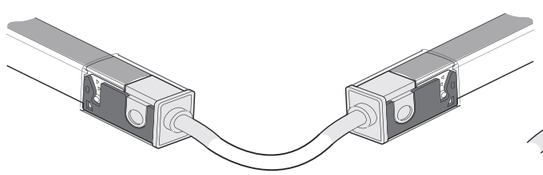

Model:DIY-SN-FR-1717-D-01-A (Right)
DIY-SN-FR-1717-D-02-A (Left)

DIY snap connector & end cap kit

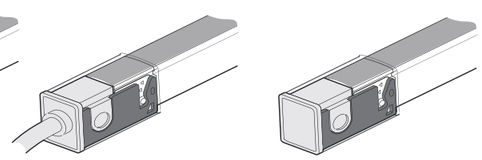



DIY-SN-END-1717-01 (Right)
DIY-SN-END-1717-02 (Left)

Other Accessories


Female & Male Connector









Female connector wire
SYZ-M12-M-2C-075-W




Middle power connector
MID-CNR-A-1T2




Male connector wire
SYZ-M12-F-2C-075-W



LED Neon Cutter
ACC-TOOL-C1



Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2




Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905



PVC End Cap
DIY-PVC-END-1717













Assistant Tool A
CC-TOOL-C3


NF1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex

NEW

Mounting Profile

Model	Description	Dimension	Drawing
ALC1717S02	Compatibility: NF1717T Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC1717S08	Description: Use for: NF1717T Length option: 1m,2m,35mm Material: Aluminum alloy Optional color:AS/AB/PW Type: Anti-drop for upside down installation		
SSC1717FLX	Use for: NF1717T Length option: 10cm, 30cm, 50cm, 100cm Material: Stainless steel Optional color: Polished Type: Flexible		
SSC1717S01	Use for: NF1717T Length option: 5cm Material: Stainless steel Optional color: Natural color Type: 316 stainless steel		
ACC-HX-S2830C2	Use for mounting channel for angle adjustment		

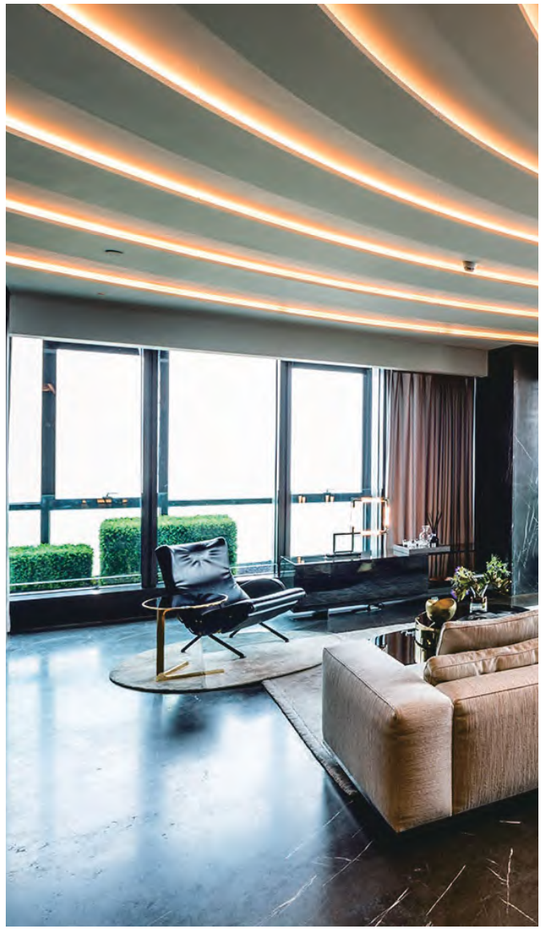

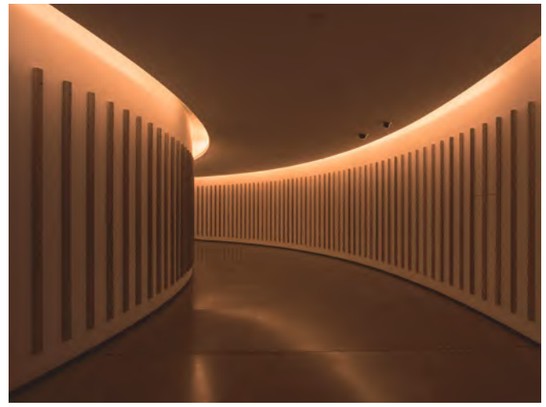





Application

Suitable for indoor and outdoor decorative lighting, architectural outline lighting, cove lighting, sign and advertising lighting.

NF0817S – 8*16.5mm Side Bending IP68 LED Neon Flex

NEW





NF0817S

- Flat surface with 120 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 130lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 20M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification		
Model	NF0817S-24-070-5W	NF0817S-24-120-10W
Operating voltage	DC24	DC24
Power consumption	5W/M	10W/M
Working Mode	CV	CV
LED type	SMD2835	SMD2835
CRI	Ra>90	Ra>90
Section Size	08*16.5mm	08*16.5mm
LED Quantity	70pcs/M	120pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K	
Available Color	R/G/B/LY/P/A/O	R/G/B/LY/P/A/O
Min. cutting Unit	7 LEDS	12 LEDS
Min. cutting length	100mm	100mm
Max. length single feed	10M	10M
Max. length double feed	20M	20M
Photo-electric Parameters		
Model	NF0817S-24-070-5W	NF0817S-24-120-10W
CCT	lm/M	lm/M
R	>40lm	>40lm
G	>70lm	>70lm
B	>13lm	>13lm
A	>40lm	>40lm
O	>32m	>32lm
P	>55lm	>55lm
LY	>90lm	>90lm
2200K	>110lm	>110lm
2700K	>110lm	>110lm
3000K	>110lm	>110lm
3500K	>120lm	>120lm
4000K	>120lm	>120lm
5000K	>130lm	>130lm


Ordering Code

NF0817S –	24	070 –	5W –	2.2K –	S –	01 –	SM
Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color	Connector entry type	Connector direction	Cable connector type
NF0817S	24 DC24V	070 70pcs 120 120pcs	5W 10W	2200K 2.2K 2700K 2.7K 3000K 3K 3500K 3.5K 4000K 4K 5000K 5K Red R Green G Blue B Amber A Orange O Pink P Lemon Yellow LY	Side entry S Direct entry D Bottom entry B	Right 01 Left 02 Double 03	Male connetor cable SM Female connector cable SF Male & female connector cable SMF Bare wire Blank

NF0817S – 8*16.5mm Side Bending IP68 LED Neon Flex


NEW

Construction

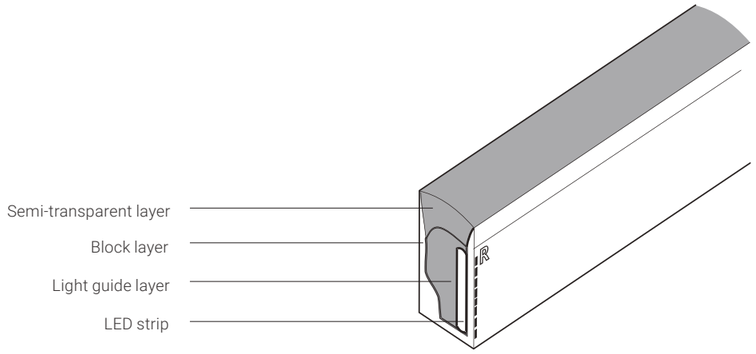


Physical Specification


Light profile




Bending direction

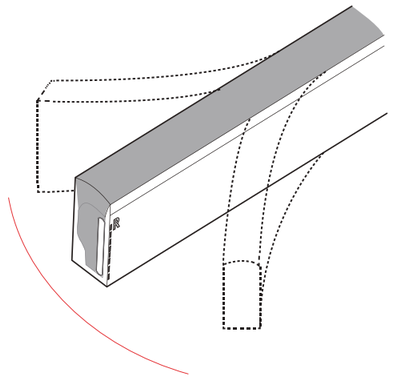


Min. bending diameter

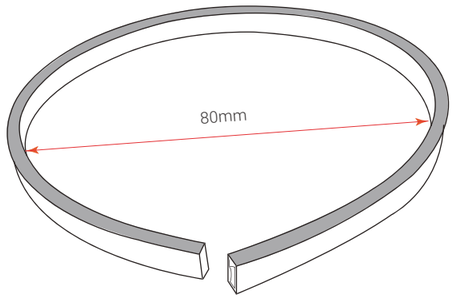

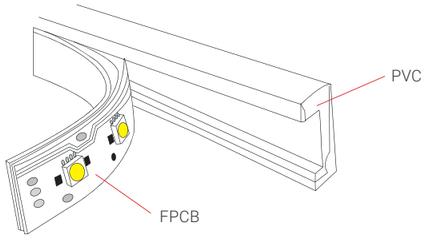


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-0817-A-D01
② MJ-0817-A-D01SM
③ MJ-0817-A-D02
④ MJ-0817-D02SF
⑤ MJ-0817-A-D03
⑥ MJ-0817-A-D03SMF




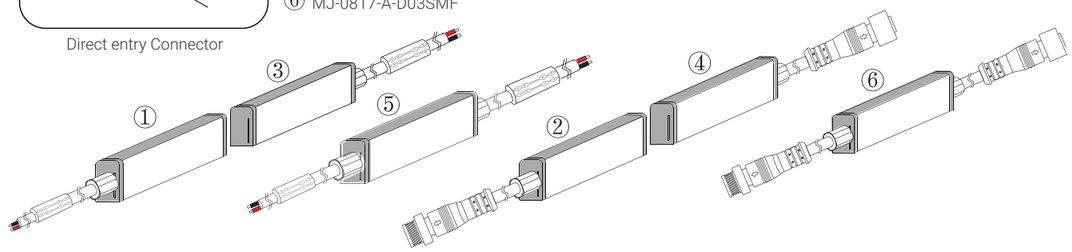





Side entry Connector

① MJ-0817-A-S01
② MJ-0817-A-S01SM
③ MJ-0817-A-S02
④ MJ-0817-A-S02SF
⑤ MJ-0817-A-S03
⑥ MJ-0817-A-S03SMF

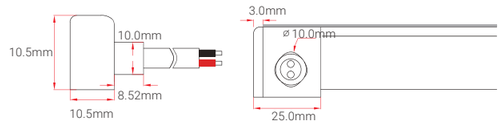


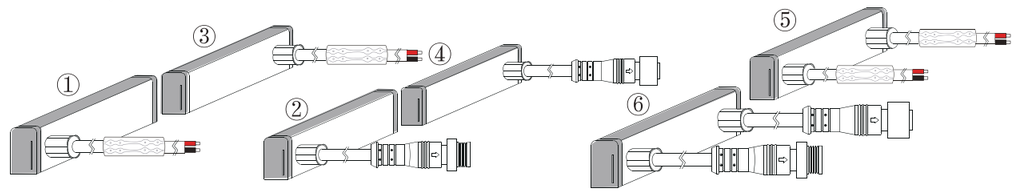




Bottom entry Connector

① MJ-0817-A-B01
② MJ-0817-A-B01SM
③ MJ-0817-A-B02
④ MJ-0817-A-B02SF
⑤ MJ-0817-A-B03
⑥ MJ-0817-A-B03SFM

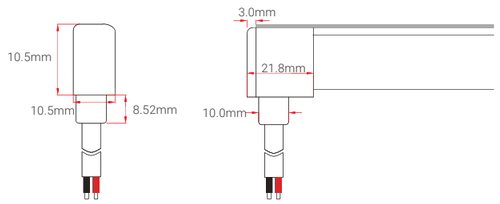

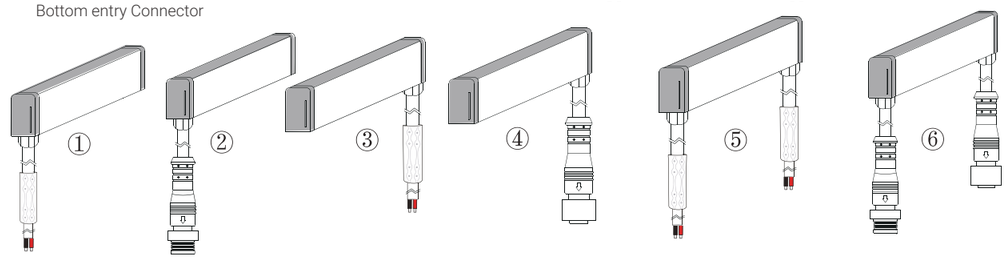


NF0817S – 8*16.5mm Side Bending IP68 LED Neon Flex

NEW


Other Accessories

Female & Male Connector



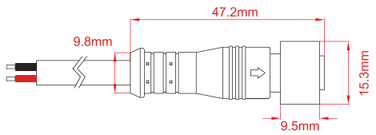


Female connector wire
SYZ-M12-M-2C-075-W

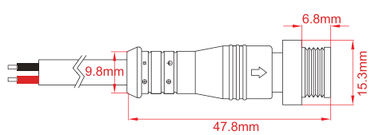


Male connector wire
SYZ-M12-F-2C-075-W






Middle power connector
MID-CNR-A-1T2



Mean Well Transformer
Non-waterproof Series





Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M


Mounting Channel

Model	Description	Dimension	Drawing
ALC0817S02	Model: ALC0817S02 Description: Use for: NF0817S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color:AS/AB/PW Type: Anti-drop for upside down installation		



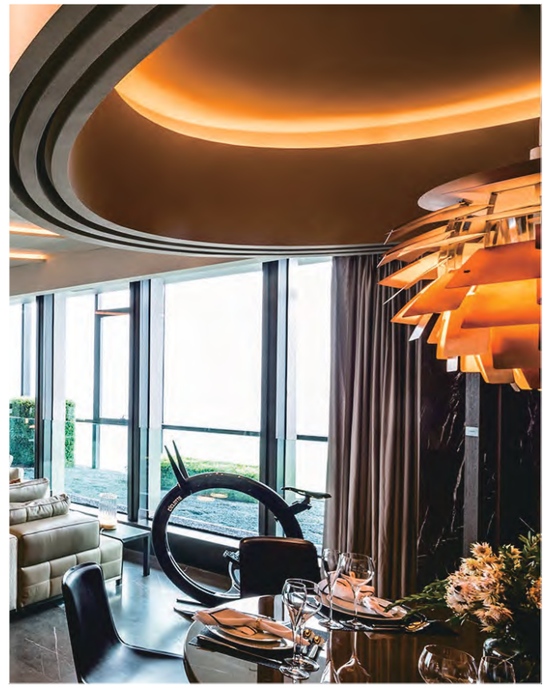




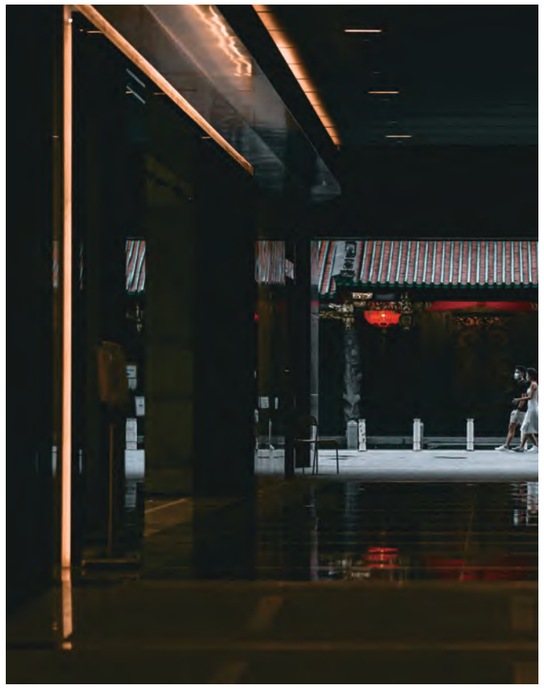

Application

Suitable for indoor and outdoor decorative lighting, architectural outline lighting, cove lighting, sign and advertising lighting.

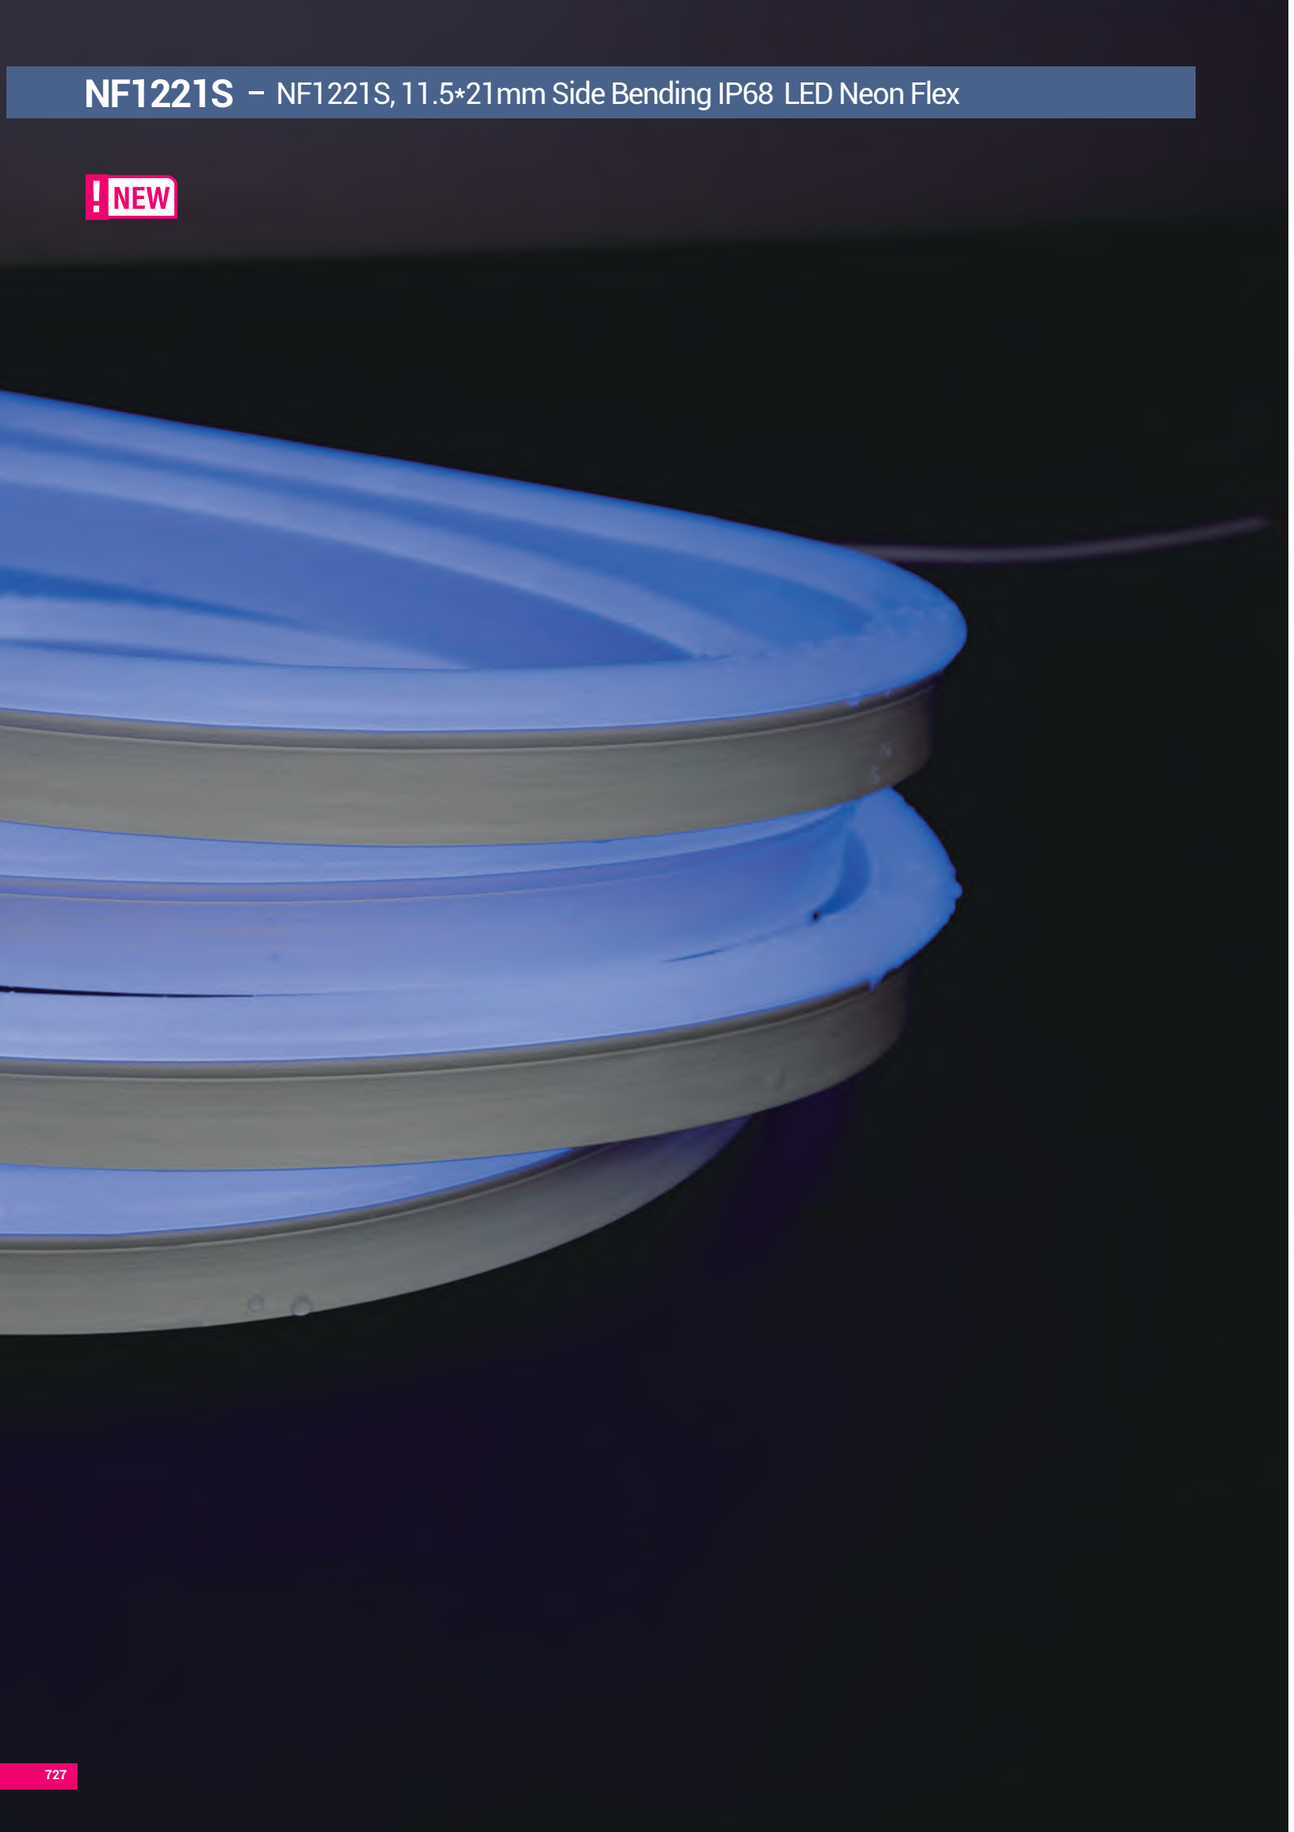

NF1221S – NF1221S, 11.5*21mm Side Bending IP68 LED Neon Flex

NEW

NF1221S

- Flat surface with 120 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 390lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 30M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Corrosion UV Saltwater

Technical Specification				
Model	NF1221S-24-072-15W	NF1221S-24-060-12W	NF1221S-24-060-7.2W	NF1221S-24-072-5W
Operating voltage	DC24	DC24	DC24	DC24
Power consumption	15W/M	12W/M	7.2W/M	5W/M
Working Mode	CV	CV	CV	CV
LED type	SMD5050	SMD5050	SMD5050	SMD3528
CRI	Ra>90	Ra>90	Ra>90	Ra>90
Section Size	11.5*21mm	11.5*21mm	11.5*21mm	11.5*21mm
LED Quantity	72pcs/M	60pcs/mM	60pcs/M	72pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K		/	2200K/2700K/3000K/3500K /4000K/5000K
Available Color	G/B/LY/P	G/B/LY/P	R/A/O	R/G/B/P/A/O
Min. cutting Unit	6 LEDS	6 LEDS	10 LEDS	12 LEDS
Min. cutting length	83.3mm	100mm	166.7mm	166.7mm
Max. length single feed	8M	10M	15M	15M
Max. length double feed	16M	20M	30M	30M
Photo-electric Parameters				
Model	NF1221S-24-072-15W	NF1221S-24-060-12W	NF1221S-24-060-7.2W	NF1221S-24-072-5W
CCT	LM/M	LM/M	LM/M	LM/M
R	/	/	>110lm	>144lm
G	>230lm	>200lm	/	>80lm
B	>40lm	>35lm	/	>14m
A	/	/	>110lm	>44lm
O	/	/	>90lm	>35lm
P	>180lm	>150lm	/	>60lm
LY	>300lm	>250lm	/	/
2200K	>330lm	>280lm	/	>120lm
2700K	>330lm	>280lm	/	>120lm
3000K	>330lm	>280lm	/	>120lm
3500K	>380lm	>330lm	/	>130lm
4000K	>380lm	>330lm	/	>130lm
5000K	>390lm	>350lm	/	>140lm

Resistant

Ordering Code

NF1221S – 24 – 060 – 5W – 2.2K – S – 01 – SM


Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color		Connector entry type		Connector direction		Cable connector type	
NF1221S	24 DC24V	060 60pcs 072 72pcs	5W 7.2W 12W 15W	2200K	2.2K	Side entry	S	Right	01	Male connetor cable	SM
				2700K	2.7K	Direct entry	D	Left	02	Female connector cable	SF
				3000K	3K	Bottom entry	B	Double	03	Male & female connector cable	SMF
				3500K	3.5K					Bare wire	Blank
				4000K	4K						
				5000K	5K						
				Red	R						
				Green	G						
				Blue	B						
				Amber	A						
				Orange	O						
				Pink	P						
				Lemon Yellow	LY						

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)

NF1221S – NF1221S, 11.5*21mm Side Bending IP68 LED Neon Flex


NEW

Construction

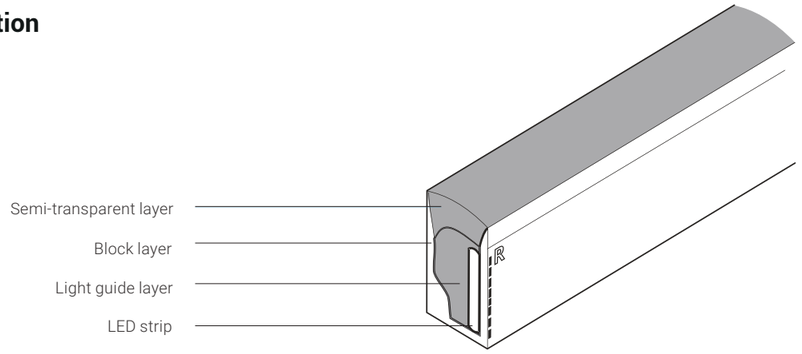


Physical Specification


Light profile

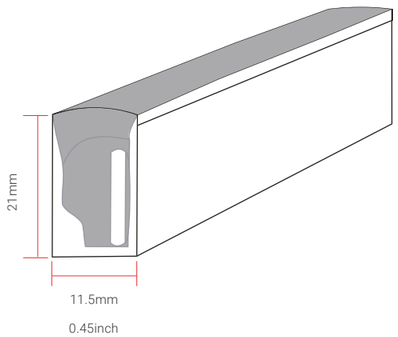


Bending direction

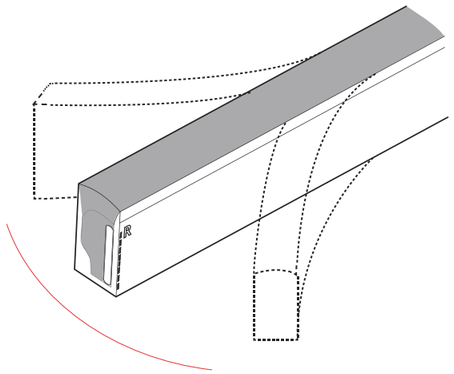


Min. bending diameter

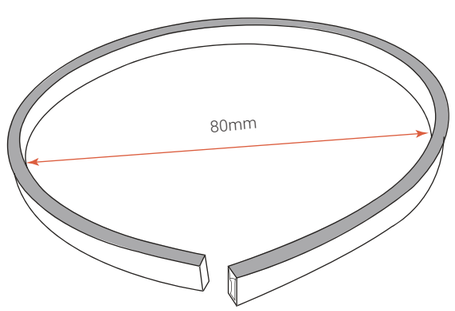

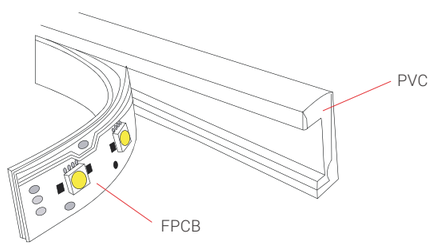


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-1221-A-D01
② MJ-1221-A-D01SM
③ MJ-1221-A-D02
④ MJ-1221-A-D02SF
⑤ MJ-1221-A-D03
⑥ MJ-1221-A-D03SMF




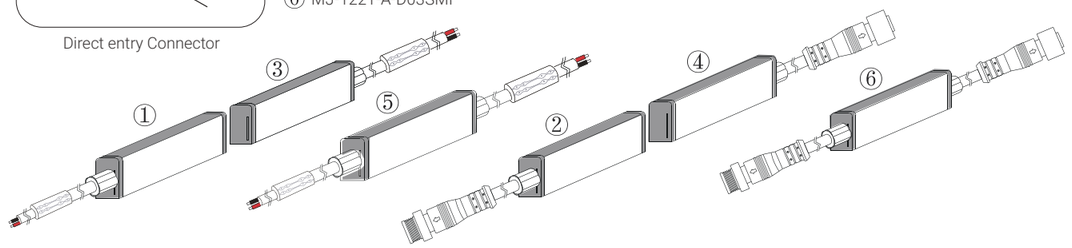





Side entry Connector

① MJ-1221-A-S01
② MJ-1221-A-S01SM
③ MJ-1221-A-S02
④ MJ-1221-A-S02SF
⑤ MJ-1221-A-S03
⑥ MJ-1221-A-S03SMF

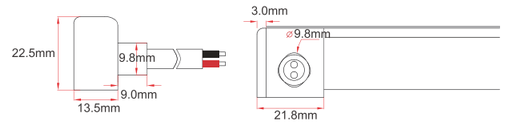


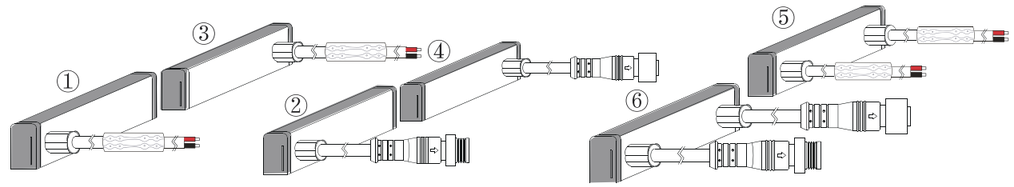




Bottom entry Connector

① MJ-1221-A-B01
② MJ-1221-A-B01SM
③ MJ-1221-A-B02
④ MJ-1221-A-B02SF
⑤ MJ-1221-A-B03
⑥ MJ-1221-A-B03SMF

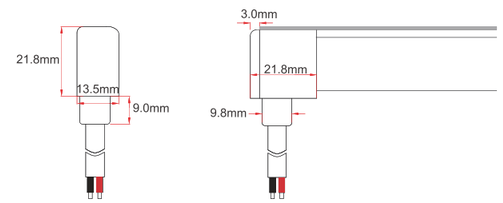

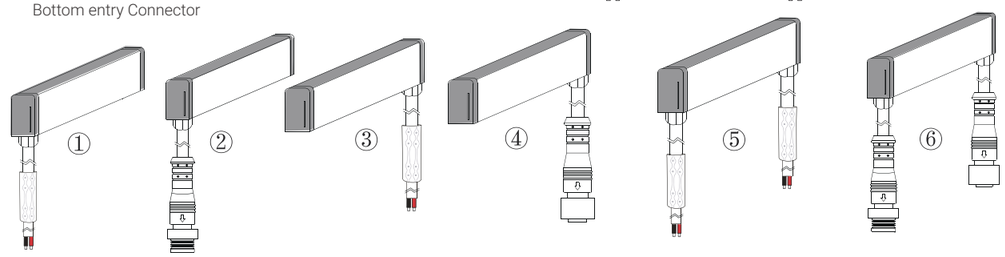


NEW

DIY Screw & Snap Connector Kit

Mould injection Jumper


(IP68 Factory Assembly only)

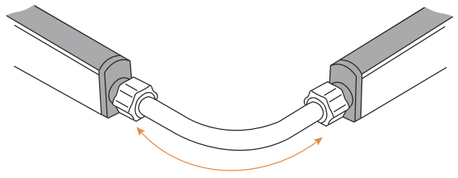


0.3m cable length

Mould injection Jumper

(IP68 Factory Assembly only)







(IP67 Only)

DIY snap splice connector

DIY screw splice connector kit

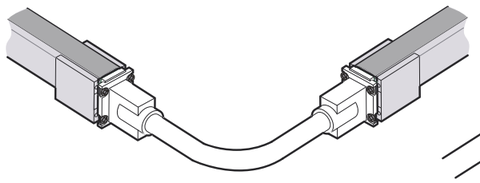


DIY screw connector & End cap kit

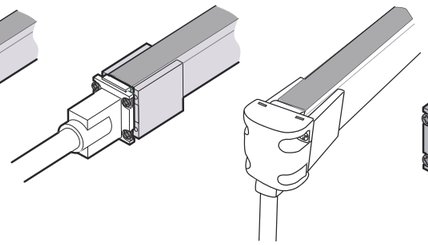


(IP67 Only)

DIY screw splice connector kit

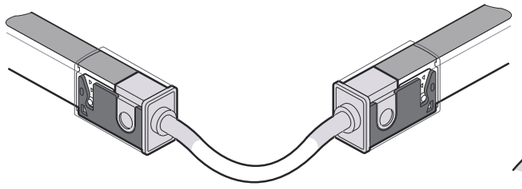


DIY screw connector & End cap kit



DIY snap front connector

(IP67 Only)



DIY snap end cap

Type

Middle injection Connector
DIY snap splice connector
DIY screw connector kit Jumper
DIY screw front connector
DIY screw end cap kit
DIY snap front connector
DIY screw end cap kit

Model


MJ-1221-A-M01-06
DIY-SC-Middle-1221/1228
DIY-SC-EXT-1221/1228-D-A
DIY-SC-FR-1221/1228-D-01-A (Right)
DIY-SC-FR-1221/1228-D-02-A (Left)
DIY-SC-FR-1221/1228-B-01-A (Right)
DIY-SC-FR-1221/1228-B-02-A (Left)
DIY-SC-END-1221/1228

DIY-SN-FR-1221/1228-D-01-A (Right)
DIY-SN-FR-1221/1228-D-02-A (Left)
DIY-SN-END-1221/1228-01 (Right)
DIY-SN-END-1221/1228-02 (Left)


Other Accessories

Female & Male Connector



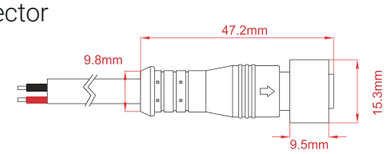


Female connector wire
SYZ-M12-M-2C-075-W

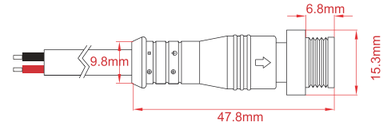


Male connector wire
SYZ-M12-F-2C-075-W







Middle power connector
MID-CNR-A-1T2



LED Neon Cutter
ACC-TOOL-C1




Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2



Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905




PVC End Cap
DIY-PVC-END-1221



Assistant Tool A
CC-TOOL-C3

NF1228S – 11.5*28mm Side Bending IP68 LED Neon Flex

NEW

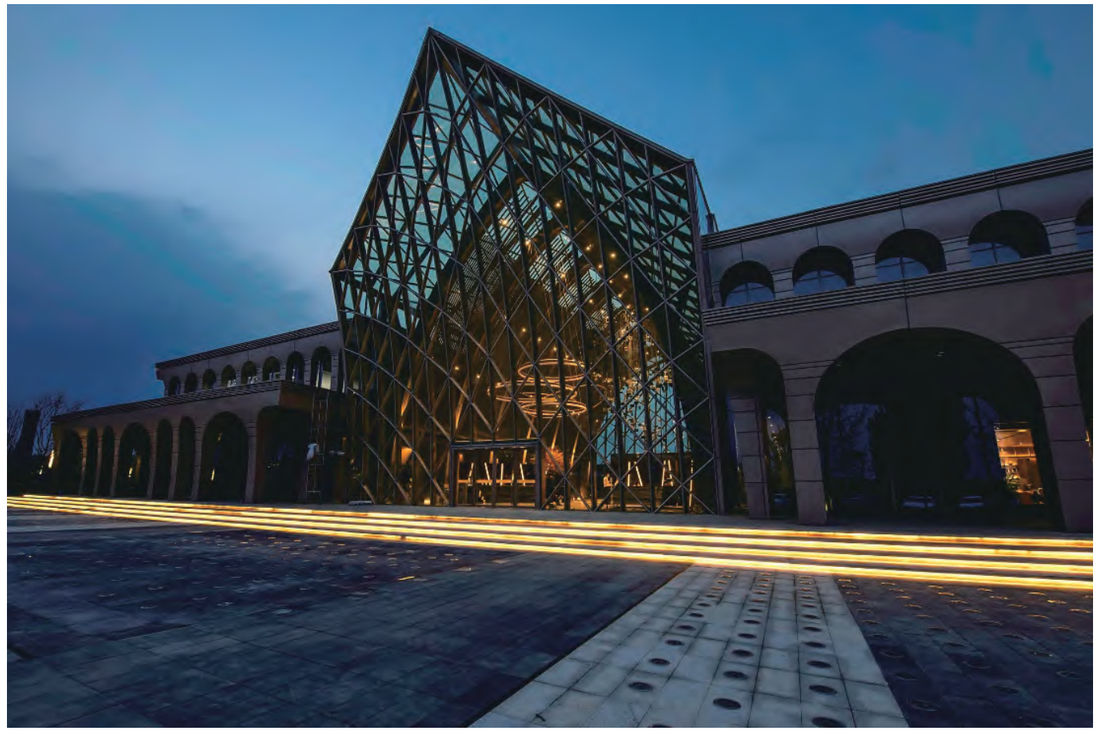



NF1228S

- Flat surface with 270 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 350lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 30M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification				
Model	NF1228S-24-072-15W	NF1228S-24-060-12W	NF1228S-24-060-7.2W	NF1228S-24-072-5W
Operating voltage	DC24	DC24	DC24	DC24
Power consumption	15W/M	12W/M	7.2W/M	5W/M
Working Mode	CV	CV	CV	CV
LED type	SMD5050	SMD5050	SMD5050	SMD3528
CRI	Ra>90	Ra>90	Ra>90	Ra>90
Section Size	11.5*28mm	11.5*28mm	11.5*28mm	11.5*28mm
LED Quantity	72pcs/M	60pcs/M	60pcs/M	72pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K		/	
Available Color	G/B/LY/P	G/B/LY/P	R/A/O	R/G/B/P/A/O
Min. cutting Unit	6 LEDS	6 LEDS	10 LEDS	12 LEDS
Min. cutting length	83.3mm	100mm	166.7mm	166.7mm
Max. length single feed	8M	10M	15M	15M
Max. length double feed	16M	20M	30M	30M
Photo-electric Parameters				
Model	NF1228S-24-072-15W	NF1228S-24-060-12W	NF1228S-24-060-7.2W	NF1228S-24-072-5W
CCT	lm/M	lm/M	lm/M	lm/M
R	/	/	>100lm	>40lm
G	>200lm	>180lm	/	>70lm
B	>35lm	>30lm	/	>13lm
A	/	/	>100lm	>40lm
O	/	/	>80lm	>32lm
P	>160lm	>130lm	/	>55lm
LY	>270lm	>220lm	/	/
2200K	>290lm	>250lm	/	>110lm
2700K	>290lm	>250lm	/	>110lm
3000K	>290lm	>300lm	/	>110lm
3500K	>340lm	>300lm	/	>120lm
4000K	>340lm	>300lm	/	>120lm
5000K	>350lm	>320lm	/	>130lm

Ordering Code

NF1228S – 24 – 060 – 5W – 2.2K – S – 01 – SM


Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color		Connector entry type		Connector direction		Cable connector type	
NF1228S	24 DC24V	060 60pcs 072 72pcs	5W 7.2W 12W 15W	2200K	2.2K	Side entry	S	Right	01	Male connetor cable	SM
				2700K	2.7K	Direct entry	D	Left	02	Female connector cable	SF
				3000K	3K	Bottom entry	B	Double	03	Male & female connector cable	SMF
				3500K	3.5K					Bare wire	Blank
				4000K	4K						
				5000K	5K						
				Red	R						
				Green	G						
				Blue	B						
				Amber	A						
				Orange	O						
				Pink	P						
				Lemon Yellow	LY						

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)

NF1228S – 11.5*28mm Side Bending IP68 LED Neon Flex


NEW

Construction

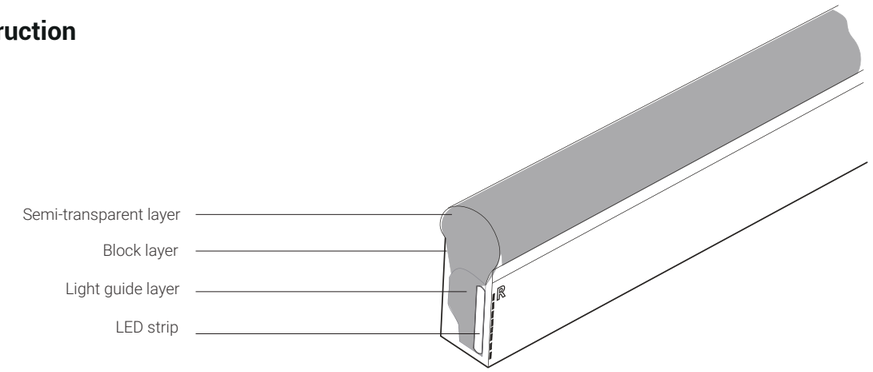


Physical Specification


Light profile

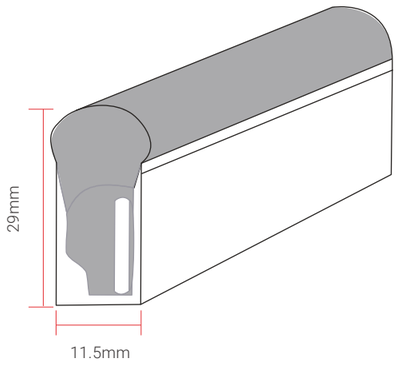


Bending direction

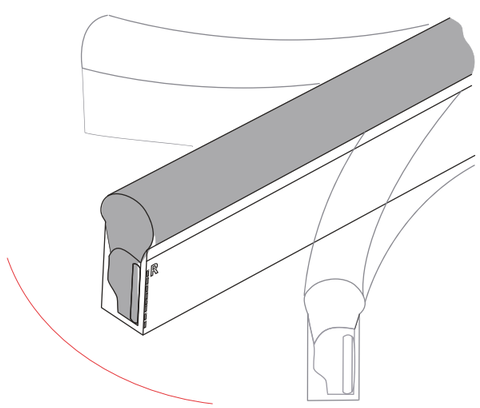


Min. bending diameter

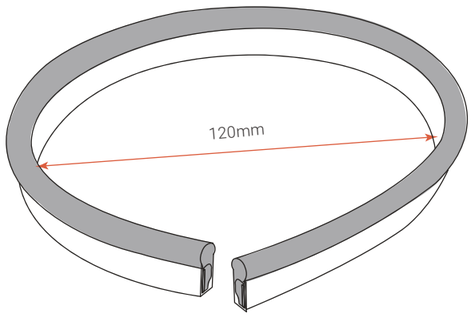

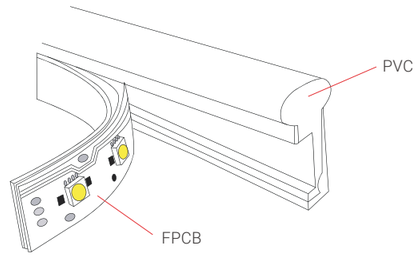


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-1228-A-D01
② MJ-1228-A-D01SM
③ MJ-1228-A-D02
④ MJ-1228-A-D02SF
⑤ MJ-1228-A-D03
⑥ MJ-1228-A-D03SMF

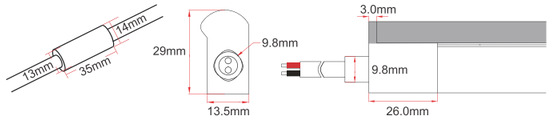


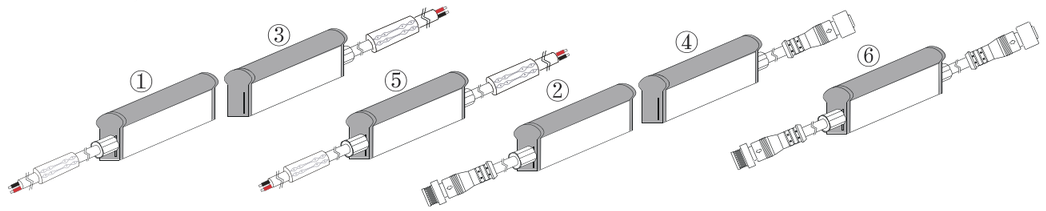





Side entry Connector

① MJ-1228-A-S01
② MJ-1228-A-S01SM
③ MJ-1228-A-S02
④ MJ-1228-A-S02SF
⑤ MJ-1228-A-S03
⑥ MJ-1228-A-S03SMF

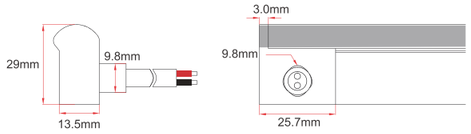


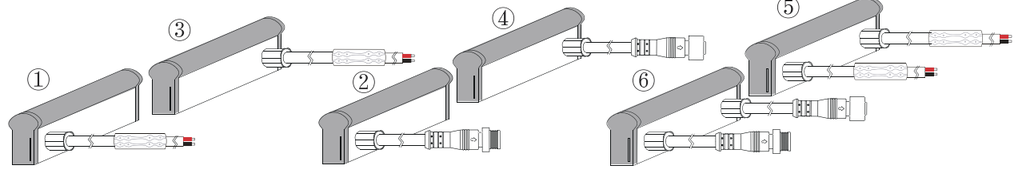




Bottom entry Connector

① MJ-1228-A-B01-06
② MJ-1228-A-B01SM
③ MJ-1228-A-B02
④ MJ-1228-A-B02SF
⑤ MJ-1228-A-B03
⑥ MJ-1228-A-B03SMF

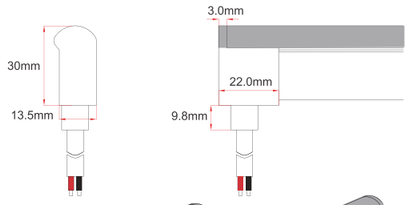

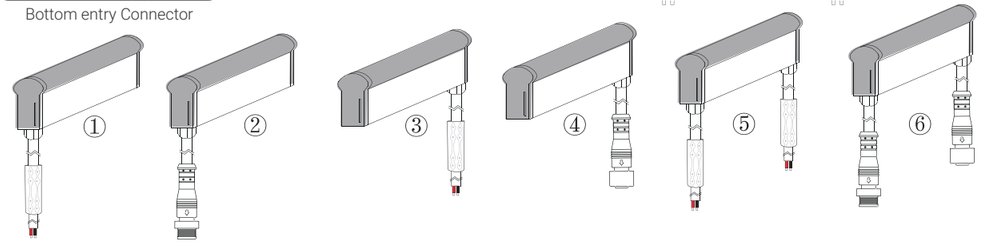


NF1228S – 11.5*28mm Side Bending IP68 LED Neon Flex

NEW


Mould injection Jumper

(IP68 Factory Assembly only)

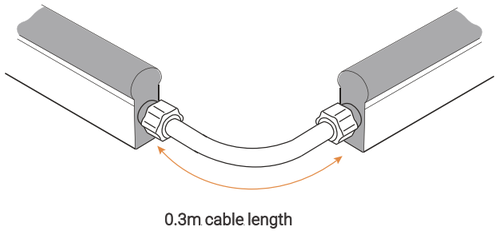


0.3m cable length

DIY snap splice connector
(IP67 Only)




DIY Screw & Snap Connector Kit (IP67 Only)

DIY screw splice connector kit

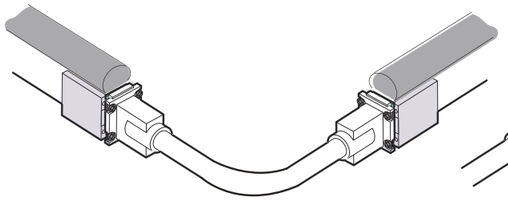


DIY screw connector kit

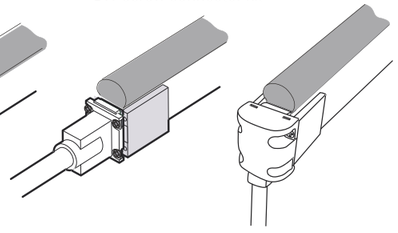


DIY screw front connector


DIY screw end cap



DIY screw splice connector kit

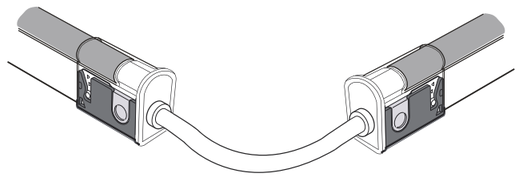


DIY snap connector kit




DIY screw front connector

DIY screw end cap




Type	Model
Middle injection Connector	MJ-1228-A-M01-06
DIY snap splice connector	DIY-SC-Middle-1221/1228
DIY screw connector kit Jumper	DIY-SC-EXT-1221/1228-D-A
DIY screw front connector	DIY-SC-FR-1221/1228-D-01-A (Right)
DIY screw end cap kit	DIY-SC-FR-1221/1228-D-02-A (Left)
DIY snap front connector	DIY-SC-FR-1221/1228-B-01-A (Right)
DIY screw end cap kit	DIY-SC-FR-1221/1228-B-02-A (Left)
	DIY-SC-END-1221/1228
	DIY-SN-FR-1221/1228-D-01-A (Right)
	DIY-SN-FR-1221/1228-D-02-A (Left)
	DIY-SN-END-1221/1228-01 (Right)
	DIY-SN-END-1221/1228-02 (Left)




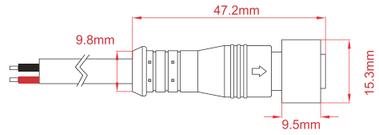


Female connector wire
SYZ-M12-M-2C-075-W

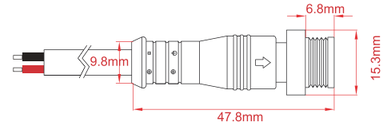


Male connector wire
SYZ-M12-F-2C-075-W







Middle power connector
MID-CNR-A-1T2



LED Neon Cutter
ACC-TOOL-C1



Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2




Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905



Dimmer















Assistant Tool A
CC-TOOL-C3

NF1221S/ NF1228S – 11.5*21mm / 11.5*28mm Side Bending IP68 LED Neon Flex


NEW

Mounting Profile


Model	Description	Dimension	Drawing
ALC1221/1228S01	Compatibility: NF1221S & NF1228S Length option: 1m,2m,35mm Materialr: Aluminum alloy Optional color: AS/AB/PW Typer: Standard		
ALC1221/1228S04	Model: ALC1221/1228S04 Description: Use for: NF1221S & NF1228S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Anti-drop for upside down installation		
ALC1221/1228H01	Use for: NF1221S & NF1228S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Cable hiding		
ALC1221/1228V01	Use for: NF1221S & NF1228S Length option: 1 m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Vertical installation		
SSC1221/1228FLX	Use for: NF1221S & NF1228S Length option: 10cm,30cm,50cm, 100cm Material: Stainless steel Optional color: Polished Type: Flexible		
SSC1221/1228S01	Use for: NF1221S & NF1228S Length option: 5cm Material: Stainless steel Optional color: Natural color Type: 316 stainless steel		

Dimming system Connection


0-10V dimming system

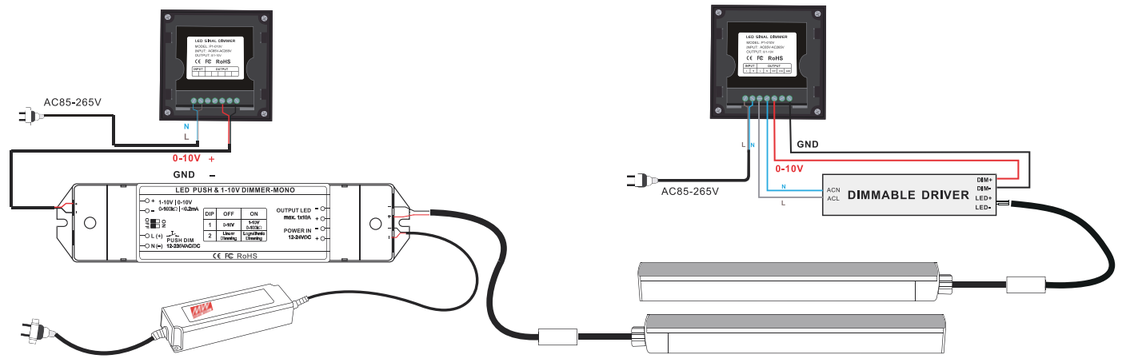

DMX512 dimming system

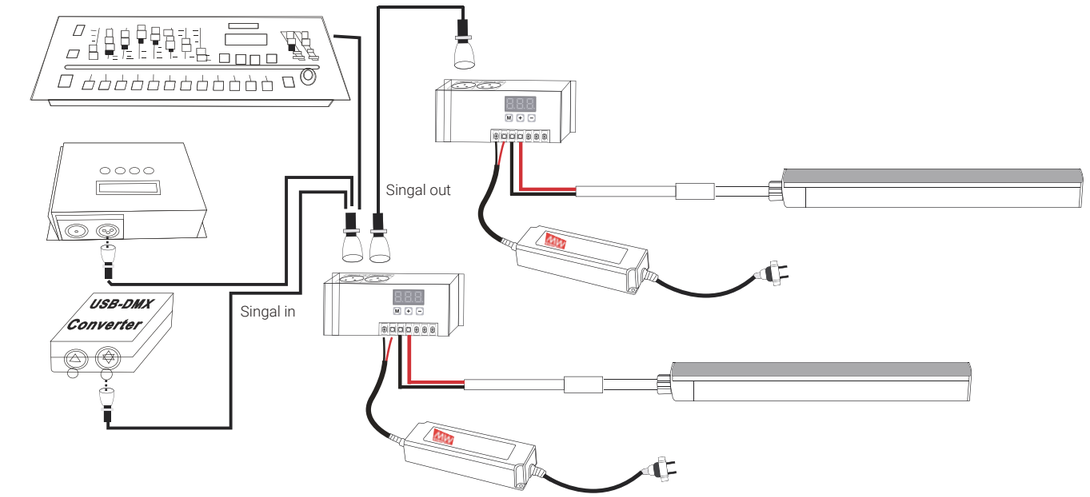

DALI dimming system

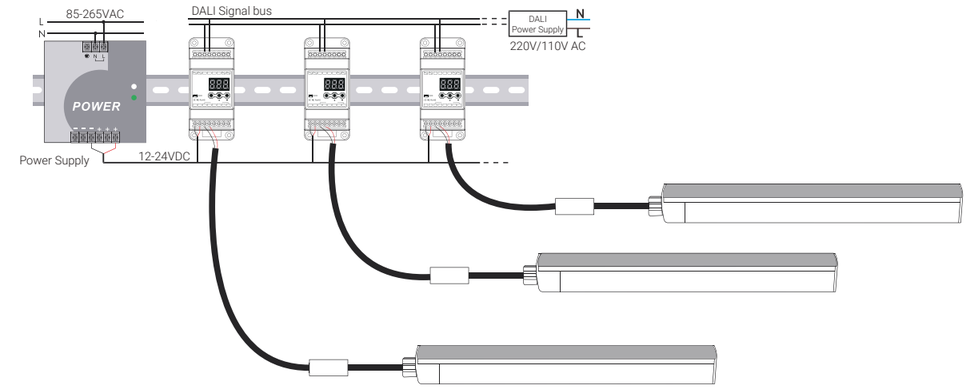


Control NEKO luminaires via CASAMBI

CASAMBI is a versatile Bluetooth-based lighting control solution for commercial, residential, hospitality, office, and retail spaces. Supporting NEKO luminaires, it offers seamless, smart control over lighting networks through an intuitive app, making it ideal for various applications.


Connect NEKO luminaires onto CASAMBI

Here below are the options.

①




NEKO Luminaire




CASAMBI-Ready LED Driver

②



NEKO Luminaire




DALI Dim LED Driver



CASAMBI DALI Dim Module

③



MODULINE 26 Track
+DALI Version Light Inset



48V LED Driver
Any 48V LED Driver



CASAMBI Bluetooth-DALI Converter

CASAMBI Wireless Controls




CASAMBI App




CASAMBI Switch

① DALI Dim, CASAMBI-Ready LED Driver

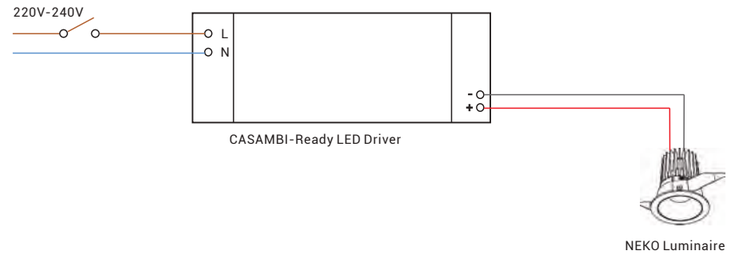


② DALI Dim, CASAMBI DALI Dim Module

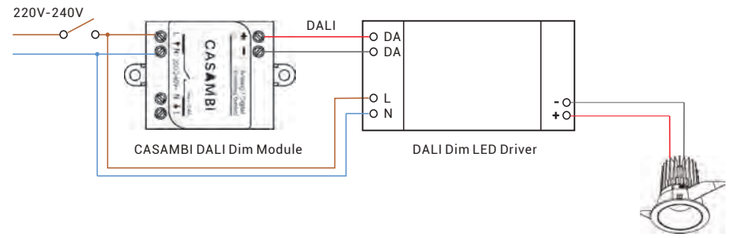

Connect Only 1 LED Driver to The CASAMBI Module


③ CASAMBI DALI Dim Control for NEKO Moduline 26 System

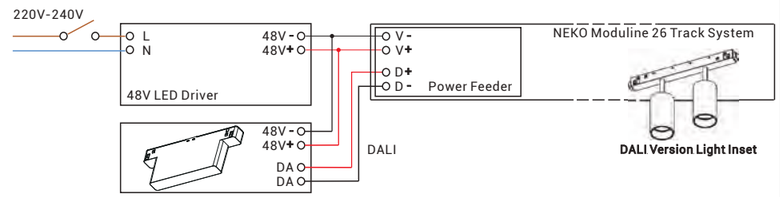


CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

Lighting Controls Wiring Diagrams

On-Off/ Non-dim




Triac Dim/ Phase Dim

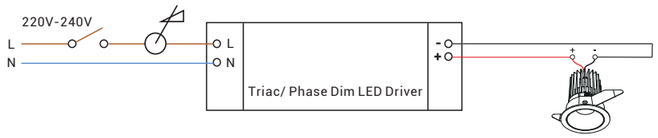


Check the Compatibility of Dimmer and LED Driver

0/1-10V Dim

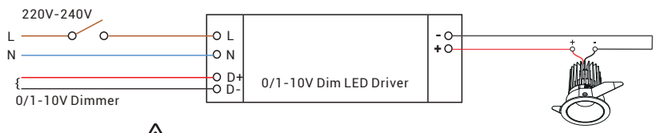


Always Respect Polarity of 0/1-10V Dim Signal

DALI Dim




Wiring Diagrams of Moduline 26 Track System

On-Off/ Non-dim

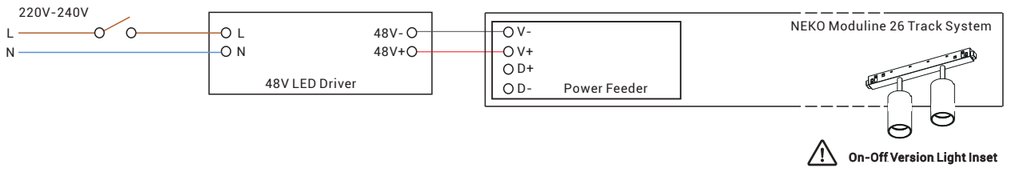

On-Off Version Light Inset


1-10V Dim

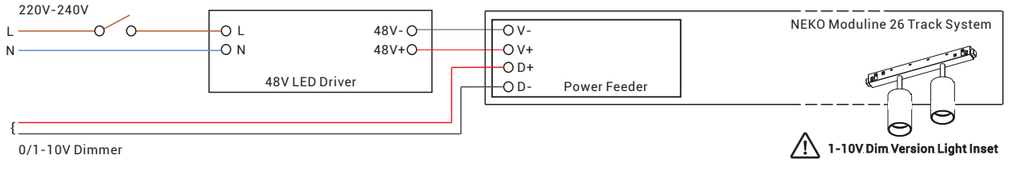

Always Respect Polarity of 0/1-10V Dim Signal


1-10V Dim Version Light Inset

DALI Dim

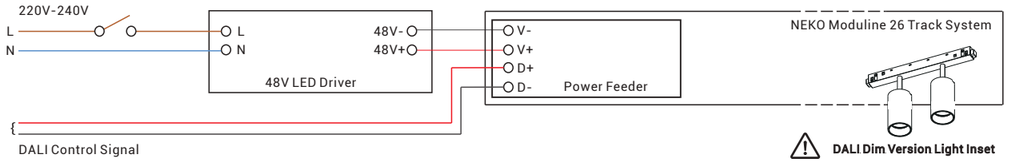

DALI Dim Version Light Inset

CASAMBI DALI Dim Control for NEKO Moduline 26 System

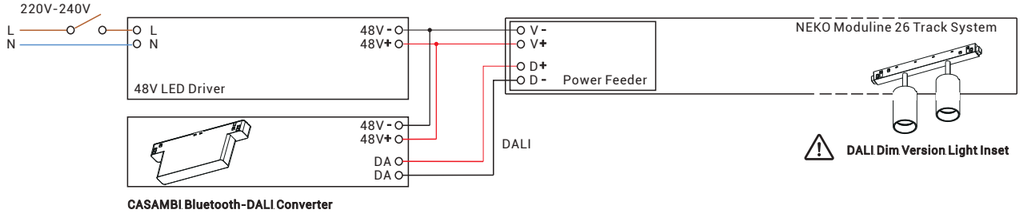


CASAMBI Bluetooth-DALI Converter

Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

CASAMBI

DALI Dim Version Light Inset

OUTDOOR

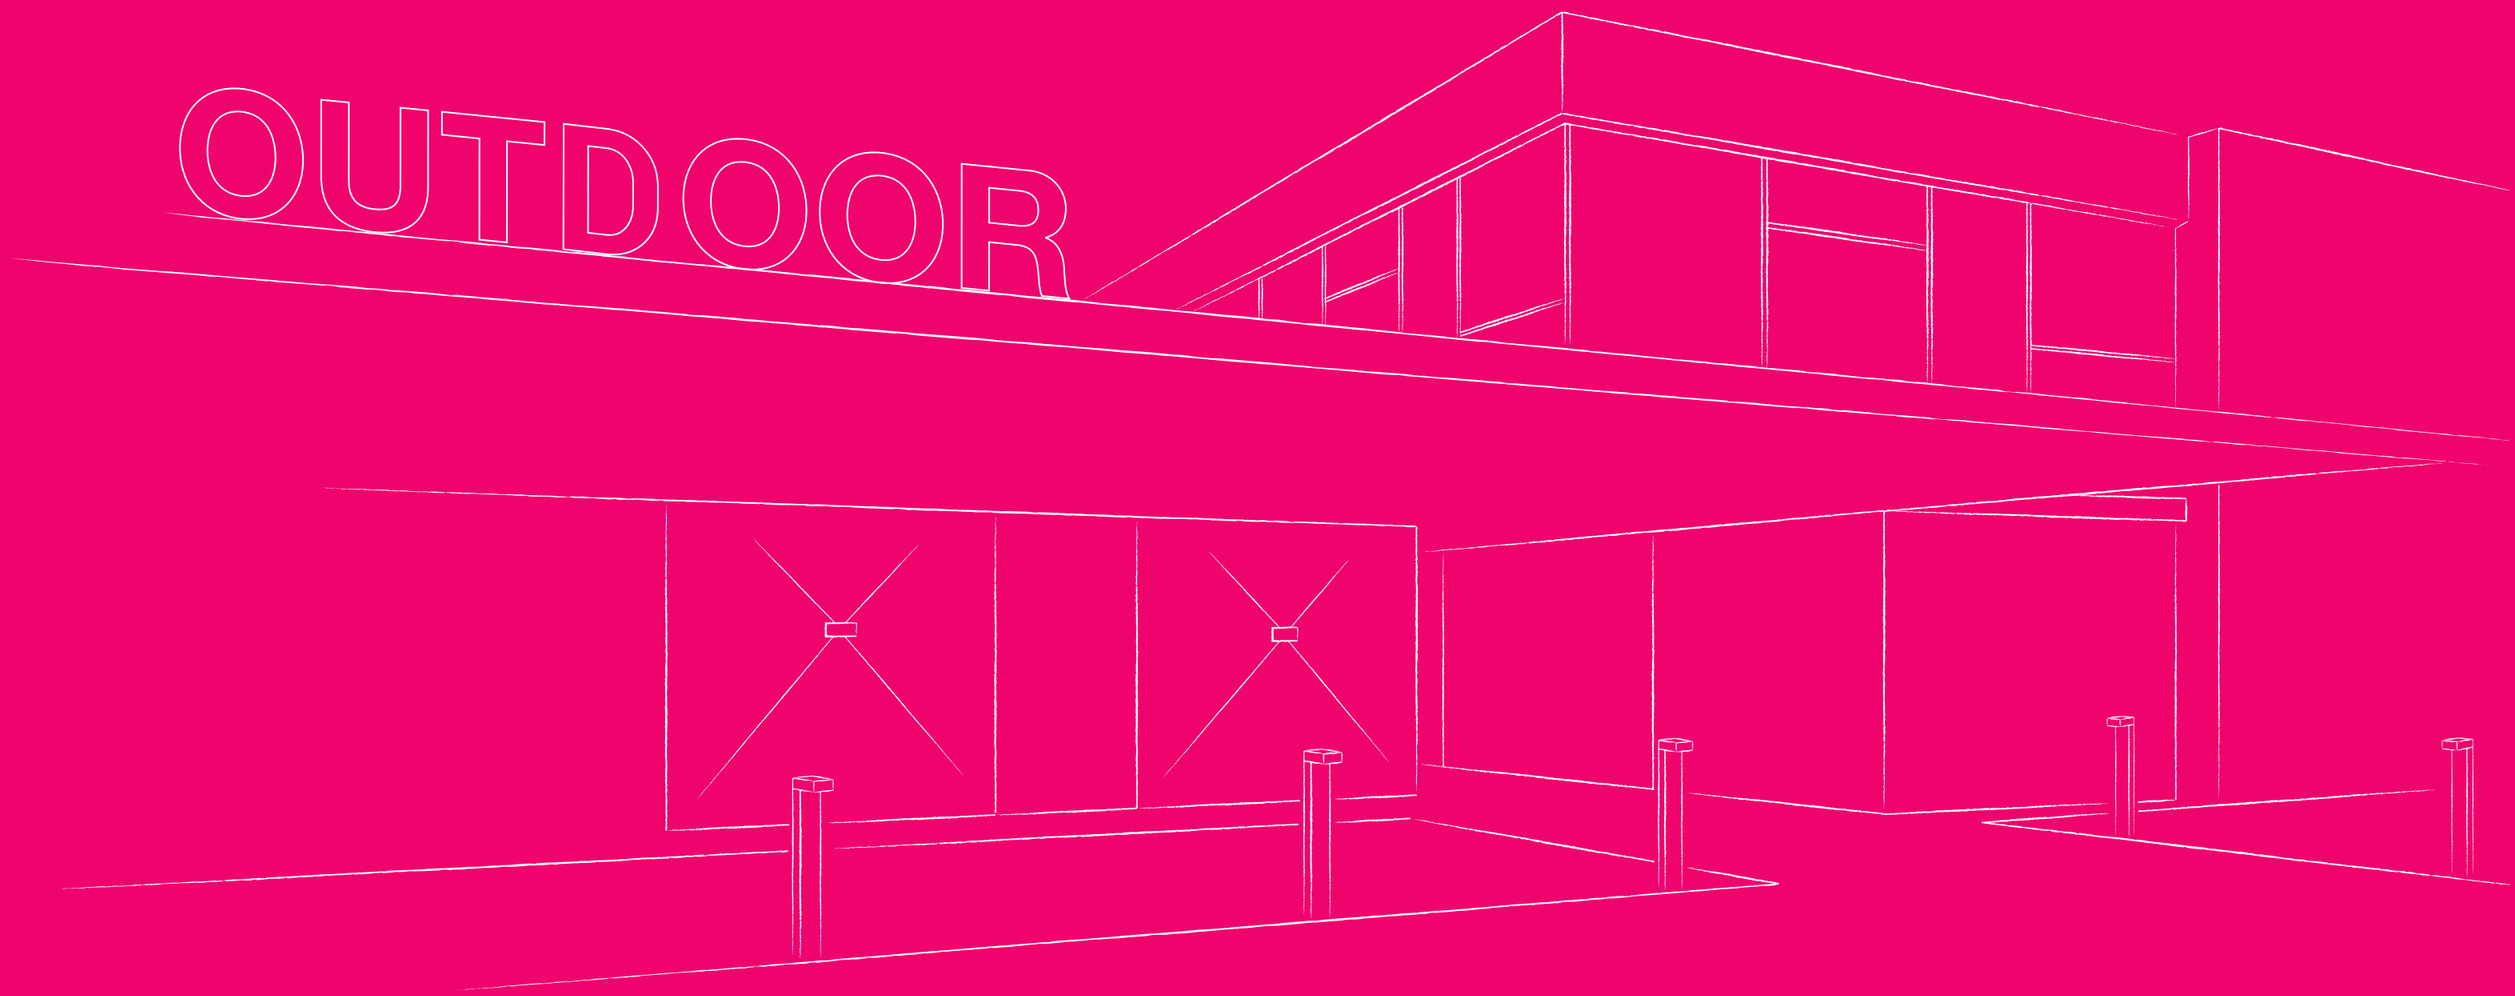

OUTDOOR RANGE

LAKEPOINT Series



LAKEPOINT Fixed
■ 749



LAKEPOINT Adjustable
■ 751

CARMEL Series



SKYSURFER SSRC
■ 753



CARMEL Round
■ 755

RIVA Series




RIVA Round
■ 757



RIVA Square
■ 759

CHIC Wall & Ceiling light Series

New



CHIC
■ 761-764

CAMPSBAY Series



CAMPSBAY Single
■ 765



CAMPSBAY Double

LAGOON Series



LAGOON
■ 767

CRUZ D Series



CRUZ D
■ 769

CAPRI Series



CAPRI
■ 771

BAY Series



BAY
■ 773

NICE Series



NICE 250S & NICE 250D
■ 775




NICE 500S & NICE 500D
■ 777

St.Tropez Series



St.Tropez
■ 779

Capetown-Recessed Series




Capetown Round-Recessed
■ 781



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■ 783



Capetown Square-Surface

AMALFI Series

New




AMALFI Single
■ 785-788



AMALFI Triple

POSEIDON Series



POSEIDON S100A
■ 789-792



POSEIDON S100B



POSEIDON S100C

CALIFORNIA Series



CALIFORNIA 12
■ 793



CALIFORNIA 16

DURBAN Series



DURBAN
■ 795

POSITANO Series



POSITANO 300
■ 797



POSITANO 600

PORTOFINO Series



PORTOFINO Adjustable
■ 799

AFTER7 Series



AFTER7 Mini
■ 801




AFTER7 Maxi
■ 802

NEPTUNE Series



NEPTUNE XSU CV
■ 805



NEPTUNE SU CV
■ 806



NEPTUNE MU CV
■ 807



NEPTUNE LU CV
■ 808

New



NEPTUNE SR CV
NEPTUNE SR HV
■ 810

New



NEPTUNE MR CV
NEPTUNE MR HV
■ 811

New



NEPTUNE LR CV
NEPTUNE LR HV
■ 812

TERARACE Series



TERARACE Micro
■ 813



TERARACE Nano
■ 814



TERARACE Mini
■ 815



TERARACE Maxi
■ 816

TERARACE Dimming Series

New



TERARACE Nano
■ 817



TERARACE Mini
■ 818



TERARACE Maxi
■ 819

EXTERIOR LIGHTING

Project: Hotel Sorrisniva, Norway




EXTERIOR LIGHTING

Project: Hotel Atlantis, Brno - Czech Republic



LAKEPOINT Fixed – Exterior LED Downlight



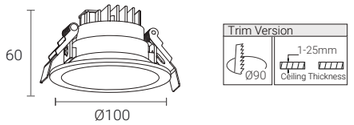


30° | 3000K | CRI >80 | IP65 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø90mm, 3000K
- CREE LED: 6W, CRI>80
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT F-830-30°	LAPF-8303008F-WW LAPF-8303008F-BB

Remark: With internal Non-Dimmable LED driver




LAKEPOINT Adjustable – Exterior LED Downlight






Quick Info


- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>80, 3000K
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver





Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info

LED Power	System Power	Input	CRI		Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT A-830-30°	LAPA-8303008F-WW LAPA-8303008F-BB

Remark: With internal Non-Dimmable LED driver


SKYSURFER SSRC – IP65 LED Ceiling Light



36° | 3000K | CRI >90 | UGR<19 | IP65 | CE | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 8W, CRI>90, 3000K
- Beam Angle: 36°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Black, White
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Standard Finish



Black

Optional Finish



White

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-BN
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-WN

Remark: With internal Non-Dimmable LED driver




CARMEL – LED Ceiling Light



55° | 3000K | CRI >80 | UGR<19 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 55°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution


3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver

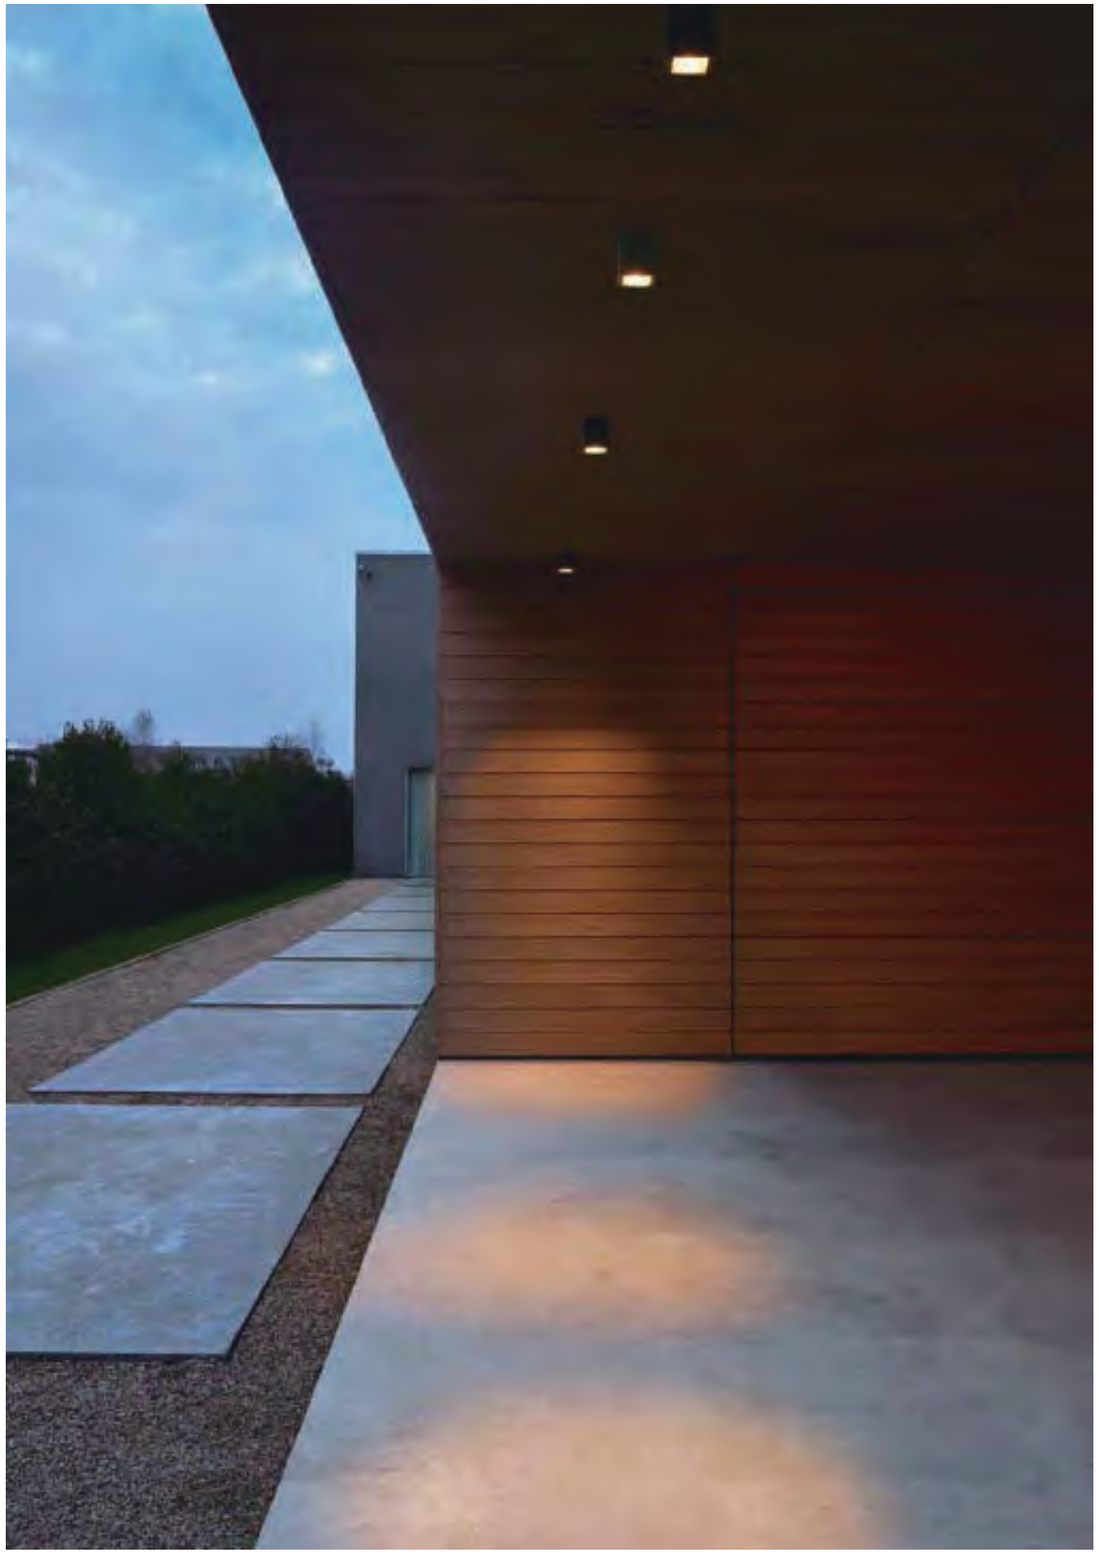


RIVA ROUND – LED Ceiling Light



110° | 3000K | CRI >80 | IP65 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMILEDS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN

Remark: With internal Non-Dimmable LED driver


RIVA SQUARE – LED Ceiling Light



110° | 3000K | CRI >80 | IP65 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMILEDS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVA Square-830-110°	RIVS-830A114F-DN

Remark: With internal Non-Dimmable LED driver

CHIC – Ceiling Light/ Wall Light

Project: Application Reference

New

CHIC

Stylish wall or ceiling light, IP65 rated
Covers in marble, clear glass or amber glass
Switchable CCT: 2200K-2700K-3000K
Base in black or white



CHIC – Ceiling Light/ Wall Light


New



120° | CRI >90 | IP65 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- LED : 3.5W, CRI>90
- CCT Switchable 2200K-2700K-3000K
- Beam Angle: 120°
- Lumen Output: Up to 375lm System Luminous Flux
- IP Class: IP65 (IP54 In Marble Cover)
- LED Driver: Phase Dim

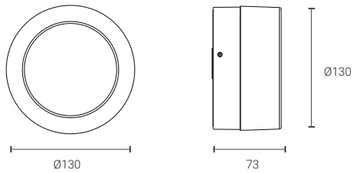

Light Distribution

3000K



Finish



White-Marble | Black-Marble | White-Amber | Black-Amber

White-Clear | Black-Clear

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	400lm 430lm 460lm	220lm 235lm 245lm	CHIC-9S3A205P-WM
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	400lm 430lm 460lm	290lm 300lm 315lm	CHIC-9S3A205P-WA
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	430lm 430lm 460lm	340lm 360lm 375lm	CHIC-9S3A205P-WC

Code Remark: P=P(Phase Dim)

Coding

CHIC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
CHIC CHIC-5W	9S3 CRI90/ 2200K-2700K -3000K	A2 120°	05 5W	P Phase Dim	W Wihte B Black	WM White-Marble BM Black-Marble WA White-Amber BA Black-Amber WC White-Clear BC Black-Clear	



Project: Application Reference

CAMPSBAY – LED Wall Light



CAMPSBAY Single





CAMPSBAY Double

45° | 3000K | CRI >80 | IP54 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CREE LED: 5W, 10W, CRI>80, 3000K
- CCT: 3000K Available as Standard
- Beam Angle: 45°
- Lumen Output: Up to 500lm/ 1000lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN
10W	12W	220-240VAC	80	3000K	45°↓ 45°↑	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN

Remark: With internal Non-Dimmable LED driver




LAGOON – LED Wall Light



100° 100° | 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 9W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	100° ↓ 100° ↑	950lm	LAGOON-830-110°	LAG-830A111F-DN

Remark: With internal Non-Dimmable LED driver






CRUZ D – LED Wall Light



120° 120° | 3000K | CRI >80 | IP65 | IK07 | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 12W, CRI>80, 3000K
- Beam Angle: 120°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	120° ↓ 120° ↑	1400lm	CRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver




CAPRI – LED Wall Light



100° □ 100° | 3000K | CRI >80 | IP65 | IK07 | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 14W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14W	16W	220-240VAC	80	3000K	100° ↓ 100° ↑	1300lm	CAPRI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver



BAY – LED Wall Light






90°
90°
3000K
CRI >80
IP65
IK07
CE
CREE
50,000h@L80B10
5 YEARS GUARANTEE

Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 90°
- Lumen Output: Up to 430lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	90°↓ 90°↑	430lm	BAY-830-90°	BAY-8309006F -DN

Remark: With internal Non-Dimmable LED driver




NICE 250 – LED Wall Light



110° | 3000K | CRI >80 | IP65 | IK07 | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- LUMILEDS LED: 5W,12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 650lm/ 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	110° ↓	650lm	NICE 250S-830-110°	N25S-830A107F-DN
12W	14W	220-240VAC	80	3000K	110° ↓ 110° ↑	1300lm	NICE 250D-830-110°	N25D-830A114F-DN

Remark: With internal Non-Dimmable LED driver




NICE 500 – LED Wall Light



110° | 3000K | CRI >80 | IP65 | IK07 | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- LUMILEDS LED: 12W, 18W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1300lm/ 1800lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K







Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110° ↓	1300lm	NICE500S-830-110°	N50S-830A114F-DN
18W	20W	220-240VAC	80	3000K	110° ↓ 110° ↑	1800lm	NICE500D-830-110°	N50D-830A120F-DN

Remark: With internal Non-Dimmable LED driver

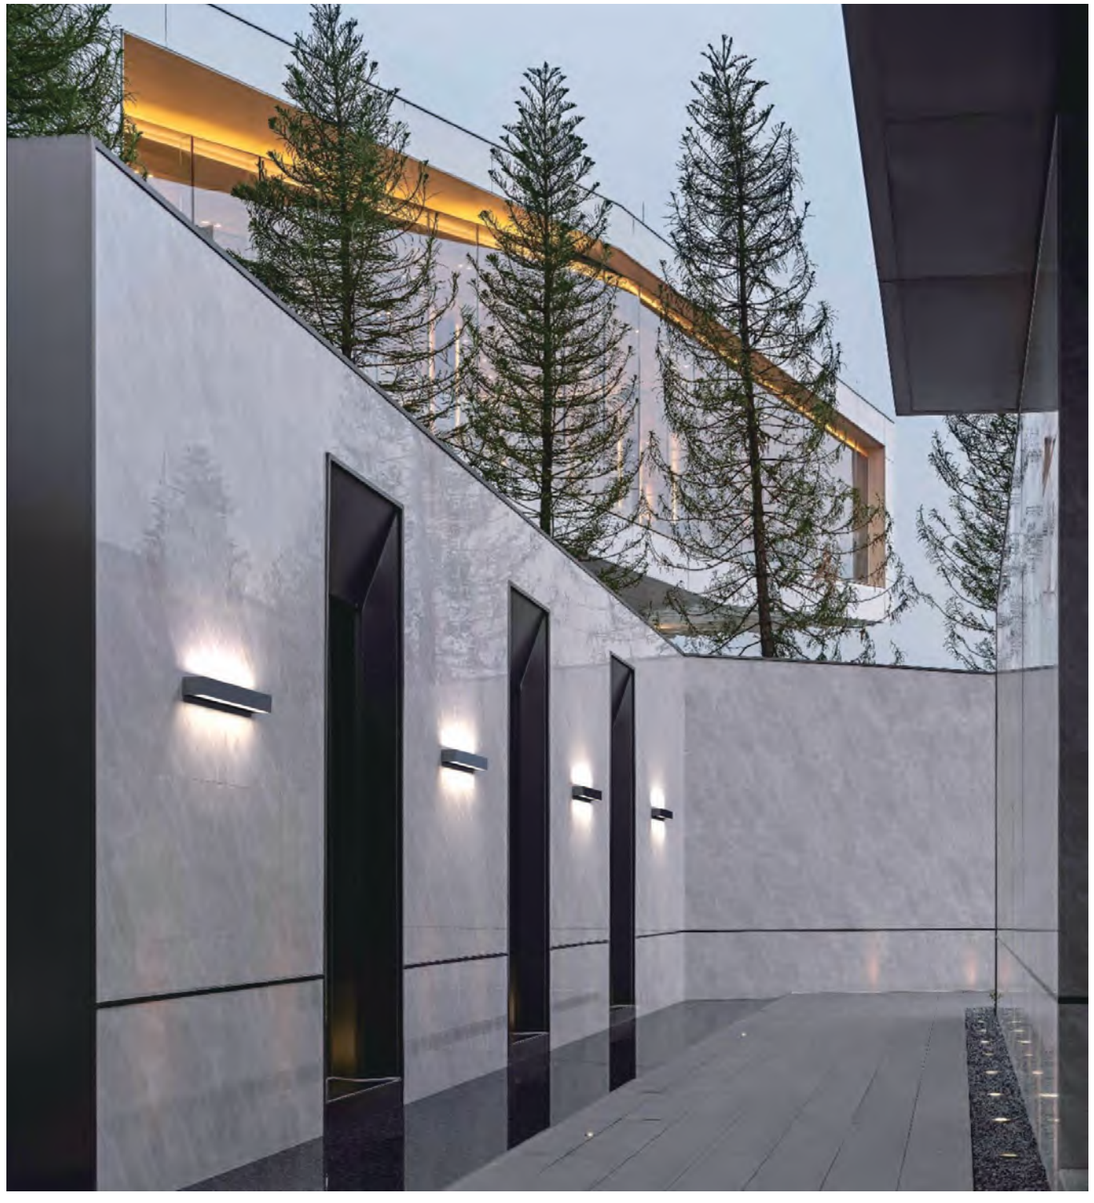

St.Tropez – Window Light






3° | 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- EDISON LED: 4W, CRI>80, 3000K
- Beam Angle: 3°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver







Ceiling / windows frame mounted light
Ideally lighting up the frame of doors, windows, corridors, etc
With its self-balancing system making the un-even surface a proper lighting effect

CAPETOWN – Recessed LED Step Light



Capetown Round-Recessed





Capetown Square-Recessed

65° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 155lm/ 165lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey, White(Square Only)
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Order Info

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-WN

Remark: With internal Non-Dimmable LED driver

Standard Finish




Dark- grey

Optional Finish



White

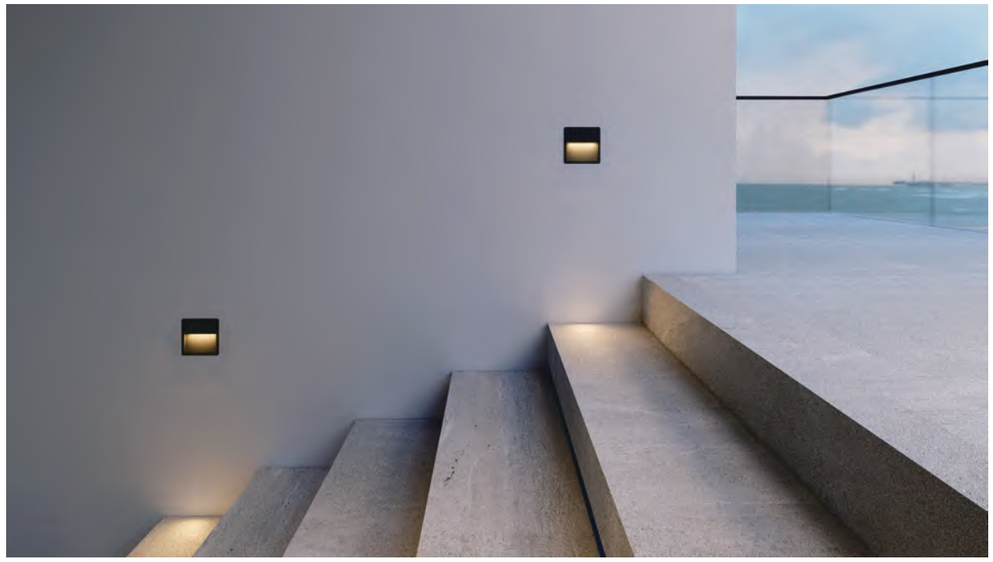



CAPETOWN – Surface LED Step Light



Capetown Round-Surface





Capetown Square-Surface

65° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 150lm/ 170lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey, White(Square Only)
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Standard Finish



Dark- grey

Optional Finish




White

Order Info

LED Power	System Power	Input	CRI	CCTBeam		System Output	Model	Code
3W	4.5W	220-240VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-WN

Remark: With internal Non-Dimmable LED driver



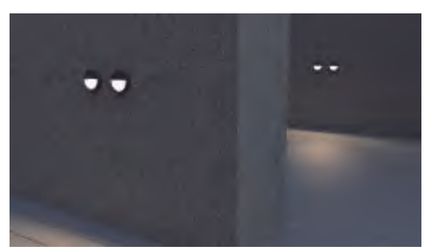

AMALFI Series – LED Bollard Lamp

New

Features


- 355° rotation for each head
- Two size options available: single head and triple heads
- IP65 waterproof rating
- Wide light distribution of 140°, achieved through a special optical design
- On/Off or DALI dimming available






AMALFI – LED Bollard Lamp

New



Amalfi Single

Amalfi Triple

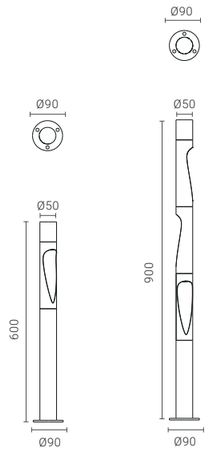


140° | 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- LED: 4.5W, 10W, CRI>80, 3000K
- Beam Angle: Light Emission 140°
- Lumen Output: Up to 200m/ 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: On-Off, DALI Dim

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Model	Code
4.5W	5W	9V	500mA	80	3000K	140°	200lm	AMFS-5W	AMFS-830A405F-DN
4.5W	5W	9V	500mA	80	3000K	140°	200lm	AMFS-5W	AMFS-830A405D-DN
10W	12W	27V	400mA	80	3000K	140°	450lm	AMFT-12W	AMFT-830A412F-DN
10W	12W	27V	400mA	80	3000K	140°	450lm	AMFT-12W	AMFT-830A412D-DN

Remark: F=(ON-OFF) D=(DALI Dim)





POSEIDON Series – IP66 Garden Light

Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- Twist & Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2700K(2200K Optional) or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- Wider light distribution 130° achieved by advanced lens design
- Invisible screws for esthetic appeal
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Side wiring and rear wiring are available

- The top cover is designed to prevent loss, requiring a downward press to unlock, similar to the safety cap mechanism.



- Interchangeable Covers




- Press Button for 2CCT Changeable






- 2700K-3000K Changeable





POSEIDON Series – IP66 Garden Light


Cover

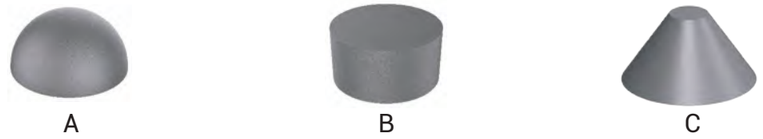

Light Engine




Mounting Type

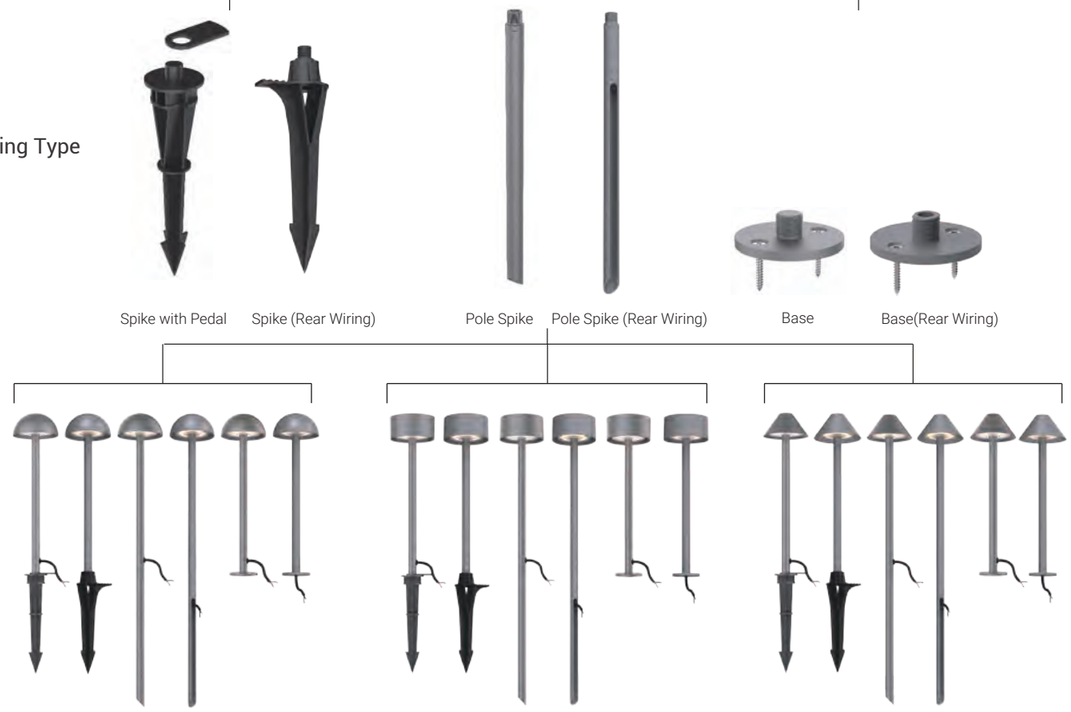

POSEIDON Series – IP66 Garden Light






360° · 2700K 3000K · CRI >80 · IP66 · IK07 · CE · OSRAM 50,000h@L80B10 · 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 4W, 5W, CRI>80, 2700K(2200K Optional)-3000K Changeable
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 370m/ 485lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

3000K





Accessory



K1 Spike with Pedal · K2 Pole Spike · K3 Base



K4 Spike (Rear Wiring) · K5 Pole Spike (Rear Wiring) · K6 Base(Rear Wiring)

EP300 Extension Pole

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	System Output	Model	
4W	5W	24VDC	80	@2700K @3000K	350lm 370lm	POSEIDON-S100A-CV	PAV1-8A3C605N-DN-K1
				@2700K @3000K	350lm 370lm	POSEIDON-S100B-CV	PBV1-8A3C605N-DN-K1
				@2700K @3000K	350lm 370lm	POSEIDON-S100C-CV	PCV1-8A3C605N-DN-K1


Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
5W	7W	220-240VAC	80	@2700K @3000K	460lm 485lm	POSEIDON-S100A-HV	PAH1-8A3C607F-DN-K1
				@2700K @3000K	460lm 485lm	POSEIDON-S100B-HV	PBH1-8A3C607F-DN-K1
				@2700K @3000K	460lm 485lm	POSEIDON-S100C-HV	PCH1-8A3C607F-DN-K1


Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

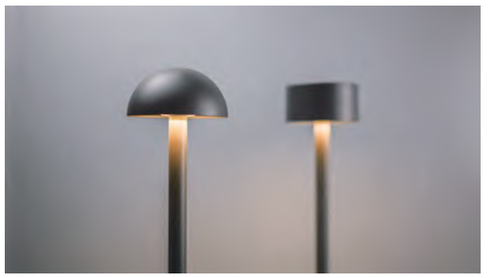

CALIFORNIA – LED Bollard Lamp



CALIFORNIA 12 CALIFORNIA 16



360° | 3000K | CRI >80 | IP65 | IK10 | CE | 5 YEARS GUARANTEE


Quick Info

- LED: 11W, 17W, CRI>80, 3000K
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 700m/ 1100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: On-Off, DALI Dim


Light Distribution

3000K

CALIFORNIA 12 -13W-830-360°




CALIFORNIA 16-19W-830-360°



Order Info

LED Power	System Power	Input	CRI	CCT	Beam		Model	Code
11W	13W	220-240VAC	80	3000K	360°	700lm	CALIFORNIA 12-830	CA12-830C613F-DN
17W	19W	220-240VAC	80	3000K	360°	1100lm	CALIFORNIA 16-830	CA16-830C619F-DN
11W	13W	220-240VAC	80	3000K	360°	700lm	CALIFORNIA 12-830	CA12-830C613D-DN
17W	19W	220-240VAC	80	3000K	360°	1100lm	CALIFORNIA 16-830	CA16-830C619D-DN

Remark: F=(ON-OFF) D=(DALI Dim)



Light Emission 360°




DURBAN – LED Bollard Lamp



270° | 3000K | CRI >80 | IP65 | IK10 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- EDISON LED: 5W, CRI>80, 3000K
- Beam Angle: Light Emission 270°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey



Light Distribution

3000K


DURBAN-6W-830-270°




Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	
5W	6W	220-240VAC	80	3000K	270°	450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver



Anchorage installation



Surface installation





Light Emission 270°




POSITANO – LED Bollard Lamp




POSITANO 300



POSITANO 600







Quick Info

- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 155lm/ 165lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power		CRI		Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	50°	200lm	POSITANO 300-830	PTO3-8305007F-DN
							POSITANO 600-830	PTO6-8305007F-DN

Remark: With internal Non-Dimmable LED driver




PORTOFINO Adjustable – Beam Angle Zooming Projector Light



15-60° Zooming | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- EDISON LED: 9W, CRI>80, 3000K
- Beam Angle: 15°-60° Zooming
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

+60° 15°-





AFTER7 MINI – Projector Light




30° 45° 2700K 3000K CRI >80

IP67 IK08 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K





Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	AFTER7 Mini-827-30°	AFMI-8273006F-DN
					45°	480lm	AFTER7 Mini-827-45°	AFMI-8274506F-DN
					30°	450lm	AFTER7 Mini-82730°-H	AFMI-8273006F-DN-H
					45°	450lm	AFTER7 Mini-827-45°-H	AFMI-8274506F-DN-H
				3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN
					30°	470lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
					45°	470lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for AFTER7 series projectors



AFTER7 MAXI – Projector Light




20° 30° 50° 2700K 3000K CRI >80

IP67 IK08 CE UKCA bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 50°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	800lm	AFTER7 Maxi-827-20°	AFMA-8272010F-DN
					30°	800lm	AFTER7 Maxi-827-30°	AFMA-8273010F-DN
					50°	800lm	AFTER7 Maxi-827-50°	AFMA-8275010F-DN
					20°	750lm	AFTER7 Maxi-827-20°-H	AFMA-8272010F-DN
					30°	750lm	AFTER7 Maxi-827-30°-H	AFMA-8273010F-DN
					50°	750lm	AFTER7 Maxi-827-50°-H	AFMA-8275010F-DN
				3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
					30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
					50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN
					20°	800lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN
					30°	800lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN
					50°	800lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for **AFTER**7 series projectors



NEPTUNE – Projector Light




Metaliron grey with triple layer coating for high corrosion and UV resistance

· Chemical conversion coating on the aluminium surface followed by the first layer of anodising
· The second layer of epoxy paint
· The third polyester powder
· Salt spray test passed over 1000hours

Optional accessary



Honeycomb



Bevel Snoot




Straight Snoot

Accessory



Stake for NEPTUNE series projectors



NEPTUNE XSU CV



NEPTUNE SU CV



NEPTUNE MU CV



NEPTUNE LU CV


NEPTUNE XSU CV – Projector Light






Quick Info

- OSRAM LED: 3W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 30°, 50°
- Lumen Output: Up to 150lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

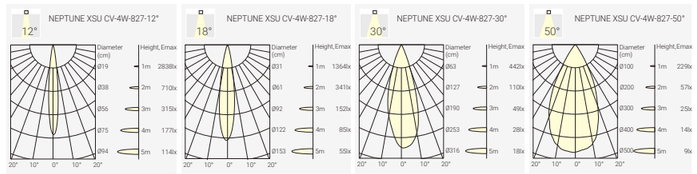

Standard Finish



Dark-Grey

Optional Finish



Rust

Green

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	4W	24VDC	80	2700K	12°	140lm	NEPTUNE XSU-4W-827-12°	NU1C-8271204N-DN
					18°	140lm	NEPTUNE XSU-4W-827-18°	NU1C-8271804N-DN
					30°	140lm	NEPTUNE XSU-4W-827-30°	NU1C-8273004N-DN
					50°	140lm	NEPTUNE XSU-4W-827-50°	NU1C-8275004N-DN
					12°	150lm	NEPTUNE XSU-4W-830-12°	NU1C-8301204N-DN
					18°	150lm	NEPTUNE XSU-4W-830-18°	NU1C-8301804N-DN
					30°	150lm	NEPTUNE XSU-4W-830-30°	NU1C-8303004N-DN
					50°	150lm	NEPTUNE XSU-4W-830-50°	NU1C-8305004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU1C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU1C NEPTUNE XSU CV	**827** CRI>80/ 2700K	**12** 12°	**04** 4W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**18** 18°			**G** Green		
		30 30°			**R** Rust		
		50 50°					


NEPTUNE SU CV – Projector Light






Quick Info

- OSRAM LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

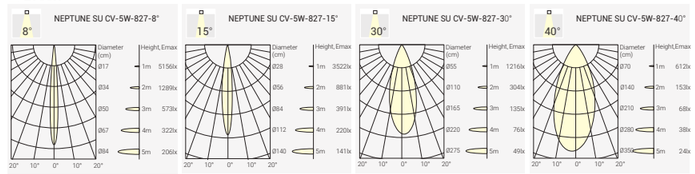

Standard Finish



Dark-Grey

Optional Finish



Rust



Green

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SU-5W-827-8° NU2C-8270805N-DN
					8°	280lm	NEPTUNE SU-5W-830-8° NU2C-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SU-5W-827-15° NU2C-8271505N-DN
					30°	380lm	NEPTUNE SU-5W-827-30° NU2C-8273005N-DN
					40°	300lm	NEPTUNE SU-5W-827-40° NU2C-8274005N-DN
					15°	420lm	NEPTUNE SU-5W-830-15° NU2C-8301505N-DN
					30°	420lm	NEPTUNE SU-5W-830-30° NU2C-8303005N-DN
					40°	350lm	NEPTUNE SU-5W-830-40° NU2C-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU2C – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU2C NEPTUNE SU CV	**827** CRI>80/ 2700K	**08** 8°	**05** 5W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**15** 15°			**G** Green		
		40 40°			**R** Rust		

NEPTUNE MU CV – Projector Light




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

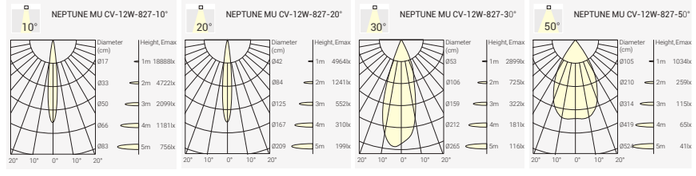

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MU-12W-827-10°	NU3C-8271012N-DN
					20°	850lm	NEPTUNE MU-12W-827-20°	NU3C-8272012N-DN
					30°	850lm	NEPTUNE MU-12W-827-30°	NU3C-8273012N-DN
					50°	800lm	NEPTUNE MU-12W-827-50°	NU3C-8275012N-DN
					10°	850lm	NEPTUNE MU-12W-830-10°	NU3C-8301012N-DN
					20°	950lm	NEPTUNE MU-12W-830-20°	NU3C-8302012N-DN
					30°	950lm	NEPTUNE MU-12W-830-30°	NU3C-8303012N-DN
					50°	850lm	NEPTUNE MU-12W-830-50°	NU3C-8305012N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb Bevel Snoot Straight Snoot

Coding

NU3C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU3C NEPTUNE MU CV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°			G Green		
		30 30°			R Rust		
		50 50°					

NEPTUNE LU CV – Projector Light




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 10°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

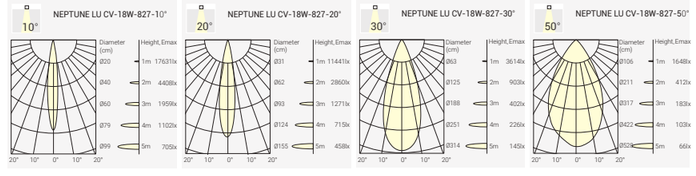

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LU-18W-827-10°	NU4C-8271018N-DN
					20°	1450lm	NEPTUNE LU-18W-827-20°	NU4C-8272018N-DN
					30°	1450lm	NEPTUNE LU-18W-827-30°	NU4C-8273018N-DN
					50°	1400lm	NEPTUNE LU-18W-827-50°	NU4C-8275018N-DN
					10°	1500lm	NEPTUNE LU-18W-830-10°	NU4C-8301018N-DN
					20°	1600lm	NEPTUNE LU-18W-830-20°	NU4C-8302018N-DN
					30°	1600lm	NEPTUNE LU-18W-830-30°	NU4C-8303018N-DN
					50°	1500lm	NEPTUNE LU-18W-830-50°	NU4C-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb

Coding

NU4C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU4C NEPTUNE LU CV	827 CRI>80/ 2700K	10 10°	18 18W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°			G Green		
		30 30°			R Rust		
		50 50°					

NEPTUNE Base Version

Standard 24VDC Version

LED Driver Integrated Version Optional


Installation Possibilities:

1 -Rear Cable
2 -Metal Tube
3 -PVC Pipe
4 -Direct Cable
5 -Corrugated Tube
6 -Spike Mounted



New





Standard Finish



Dark-Grey

Optional Finish



Green Rust

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb Bevel Snoot Straight Snoot


15° 30° 40° 2700K 3000K CRI >80 UGR<19 IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

2700K

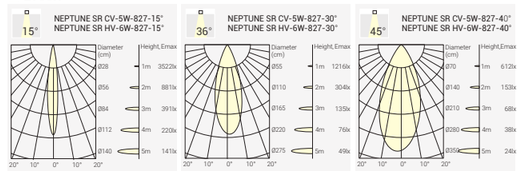

Order Info

24VDC Verison

LED Power	System Power	Voltage	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80 2700K	15°	380lm	NEPTUNE SR CV-5W-827-15°	NR1C-8271505F-DN
				30°	380lm	NEPTUNE SR CV-5W-827-30°	NR1C-8273005F-DN
				40°	300lm	NEPTUNE SR CV-5W-827-40°	NR1C-8274005F-DN
				15°	420lm	NEPTUNE SR CV-5W-830-15°	NR1C-8301505F-DN
				30°	420lm	NEPTUNE SR CV-5W-830-30°	NR1C-8303005F-DN
				40°	350lm	NEPTUNE SR CV-5W-830-40°	NR1C-8304005F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SR HV-6W-827-15°	NR1H-8271506F-DN
					30°	380lm	NEPTUNE SR HV-6W-827-30°	NR1H-8273006F-DN
					40°	300lm	NEPTUNE SR HV-6W-827-40°	NR1H-8274006F-DN
					15°	420lm	NEPTUNE SR HV-6W-830-15°	NR1H-8301506F-DN
					30°	420lm	NEPTUNE SR HV-6W-830-30°	NR1H-8303006F-DN
					40°	350lm	NEPTUNE SR HV-6W-830-40°	NR1H-8304006F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR1H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR1H NEPTUNE SR CV	827 CRI>80/ 2700K	15 15°	05 5W	F ON-OFF	D Dark-Grey	N None	
	830 CRI>80/ 3000K	30 30°	06 6W		G Green		
		40 40°			R Rust		

NEPTUNE MR – Projector Light

New




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

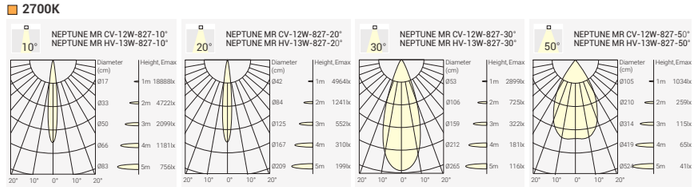

Standard Finish



Dark-Grey

Optional Finish



Green Rust

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb Bevel Snoot Straight Snoot

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MR CV-12W-827-10°	NR2C-8271012F-DN
					20°	850lm	NEPTUNE MR CV-12W-827-20°	NR2C-8272012F-DN
					30°	850lm	NEPTUNE MR CV-12W-827-30°	NR2C-8273012F-DN
					50°	800lm	NEPTUNE MR CV-12W-827-50°	NR2C-8275012F-DN
				3000K	10°	850lm	NEPTUNE MR CV-12W-830-10°	NR2C-8301012F-DN
					20°	950lm	NEPTUNE MR CV-12W-830-20°	NR2C-8302012F-DN
					30°	950lm	NEPTUNE MR CV-12W-830-30°	NR2C-8303012F-DN
					50°	850lm	NEPTUNE MR CV-12W-830-50°	NR2C-8305012F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MR HV-13W-827-10°	NR2H-8271013F-DN
					20°	850lm	NEPTUNE MR HV-13W-827-20°	NR2H-8272013F-DN
					30°	850lm	NEPTUNE MR HV-13W-827-30°	NR2H-8273013F-DN
					50°	800lm	NEPTUNE MR HV-13W-827-50°	NR2H-8275013F-DN
				3000K	10°	850lm	NEPTUNE MR HV-13W-830-10°	NR2H-8301013F-DN
					20°	950lm	NEPTUNE MR HV-13W-830-20°	NR2H-8302013F-DN
					30°	950lm	NEPTUNE MR HV-13W-830-30°	NR2H-8303013F-DN
					50°	850lm	NEPTUNE MR HV-13W-830-50°	NR2H-8305013F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR2H	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
NR2H NEPTUNE MR HV		827 CRI>80/ 2700K 830 CRI>80/ 3000K	10 10° 20 20° 30 30° 50 50°	12 12W 13 13W	F ON-OFF		D Dark-Grey G Green R Rust	N None		

NEPTUNE LR – Projector Light

New




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

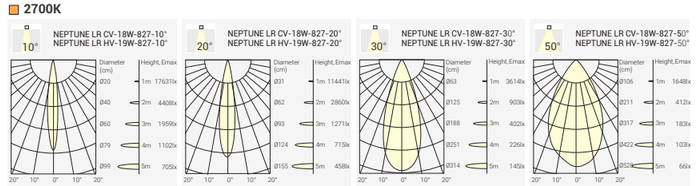

Standard Finish



Dark-Grey

Optional Finish




Green Rust

Accessory: Stake for NEPTUNE series projectors



Optional Accessary

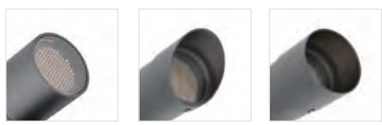

Honeycomb Bevel Snoot Straight Snoot

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LR CV-18W-827-10°	NR3C-8271018F-DN
					20°	1450lm	NEPTUNE LR CV-18W-827-20°	NR3C-8272018F-DN
					30°	1450lm	NEPTUNE LR CV-18W-827-30°	NR3C-8273018F-DN
					50°	1400lm	NEPTUNE LR CV-18W-827-50°	NR3C-8275018F-DN
				3000K	10°	1500lm	NEPTUNE LR CV-18W-830-10°	NR3C-8301018F-DN
					20°	1600lm	NEPTUNE LR CV-18W-830-20°	NR3C-8302018F-DN
					30°	1600lm	NEPTUNE LR CV-18W-830-30°	NR3C-8303018F-DN
					50°	1500lm	NEPTUNE LR CV-18W-830-50°	NR3C-8305018F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LR HV-19W-827-10°	NR3H-8271019F-DN
					20°	1450lm	NEPTUNE LR HV-19W-827-20°	NR3H-8272019F-DN
					30°	1450lm	NEPTUNE LR HV-19W-827-30°	NR3H-8273019F-DN
					50°	1400lm	NEPTUNE LR HV-19W-827-50°	NR3H-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LR HV-19W-830-10°	NR3H-8301019F-DN
					20°	1600lm	NEPTUNE LR HV-19W-830-20°	NR3H-8302019F-DN
					30°	1600lm	NEPTUNE LR HV-19W-830-30°	NR3H-8303019F-DN
					50°	1500lm	NEPTUNE LR HV-19W-830-50°	NR3H-8305019F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR23H	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
NR2H NEPTUNE LR HV		827 CRI>80/ 2700K 830 CRI>80/ 3000K	10 10° 20 20° 30 30° 50 50°	18 18W 19 19W	F ON-OFF		D Dark-Grey G Green R Rust	N None		

TERARACE MICRO – Recessed Ground Light




30° 40° 65° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 1W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 40°, 65°
- Lumen Output: Up to 100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K

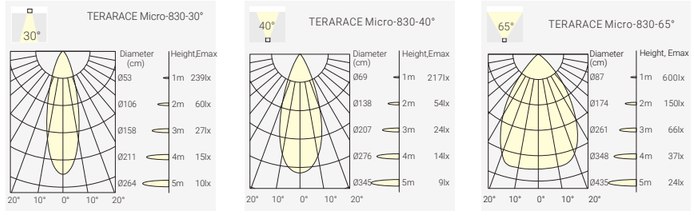

Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1W	1.5W	24V	80	2700K	30°	90lm	TERARACE Micro-827-30°	TEMI-8273002F-DN
					40°	90lm	TERARACE Micro-827-40°	TEMI-8274002F-DN
					65°	90lm	TERARACE Micro-827-65°	TEMI-8276502F-DN
				3000K	30°	100lm	TERARACE Micro-830-30°	TEMI-8303002F-DN
					40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
					65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE NANO – Recessed Ground Light




18° 35° 60° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 1.6W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 35°, 60°
- Lumen Output: Up to 120lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K

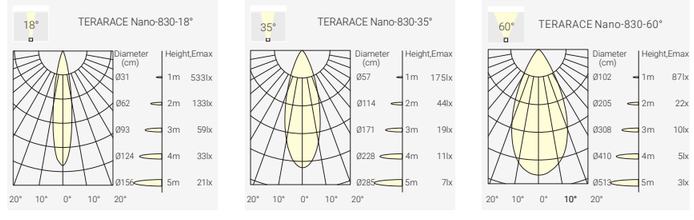

Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6W	2W	24V	80	2700K	18°	110lm	TERARACE Nano-827-18°	TENA-8271802F-DN
					35°	110lm	TERARACE Nano-827-35°	TENA-8273502F-DN
					60°	110lm	TERARACE Nano-827-60°	TENA-8276002F-DN
				3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
					35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
					60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


TERARACE MINI – Recessed Ground Light



30° 45° 2700K 3000K CRI >80 IP67 IK08 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	TERARACE Mini-827-30°	TEMI-8273006F-DN
					45°	480lm	TERARACE Mini-827-45°	TEMI-8274506F-DN
				3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
					45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


TERARACE MAXI – Recessed Ground Light



20° 30° 50° 2700K 3000K CRI >80 IP67 IK08 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	810lm	TERARACE Maxi-827-20°	TEMA-8272010F-DN
					30°	810lm	TERARACE Maxi-827-30°	TEMA-8273010F-DN
					50°	810lm	TERARACE Maxi-827-50°	TEMA-8275010F-DN
				3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
					30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
					50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE NANO Dimming – Recessed Ground Light

New




15° 30° 60° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- OSRAM LED: 3 W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 60°
- Lumen Output: Up to 260lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	3.5W	24V	80	2700K	15°	250lm	TERARACE NANO Dimming-827-15°	TNAD-8271504N-DN
					30°	210lm	TERARACE NANO Dimming-827-30°	TNAD-8273004N-DN
					60°	180lm	TERARACE NANO Dimming-827-60°	TNAD-8276004N-DN
				3000K	15°	260lm	TERARACE NANO Dimming-830-15°	TNAD-8301504N-DN
					30°	220lm	TERARACE NANO Dimming-830-30°	TNAD-8303004N-DN
					60°	190lm	TERARACE NANO Dimming-830-60°	TNAD-8306004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver

TERARACE MINI Dimming – Recessed Ground Light

New




30° 45° 2700K 3000K CRI >80

IP67 IK08 CE bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required



Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	400lm	TERARACE MINI Dimming-827-30°	TMID-8273006N-DN
					45°	400lm	TERARACE MINI Dimming-827-45°	TMID-8274506N-DN
				3000K	30°	410lm	TERARACE MINI Dimming-830-30°	TMID-8303006N-DN
					45°	410lm	TERARACE MINI Dimming-830-45°	TMID-8304506N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver

TERARACE MAXI Dimming – Recessed Ground Light

New




15° 35° 45° 2700K 3000K CRI >80

IP67 IK08 CE bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 35°, 45°
- Lumen Output: Up to 960lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required




Light Distribution

3000K









Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	15°	740lm	TERARACE MAXI Dimming-827-15°	TMAD-8271510N-DN
					35°	930lm	TERARACE MAXI Dimming-827-35°	TMAD-8273510N-DN
					45°	870lm	TERARACE MAXI Dimming-827-45°	TMAD-8274510N-DN
				3000K	15°	760lm	TERARACE MAXI Dimming-830-15°	TMAD-8301510N-DN
					35°	960lm	TERARACE MAXI Dimming-830-35°	TMAD-8303510N-DN
					45°	900lm	TERARACE MAXI Dimming-830-45°	TMAD-8304510N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver

Headquarters

Switzerland

NEKO Lighting AG
Kreuzstrasse 2, CH-8008, Zürich, Switzerland
T +41 44 451 8015
sales@nekolighting.com
https://nekolighting.com/de/

Factory

China

NEKO Lighting Ltd.
Nairui Technology Park, No. 5 Weideng Road
Maan Town, Huicheng District, Huizhou
Guangdong, 516000, China
T +86 752 2088 669
sales@nekolighting.com
https://nekolighting.com/

Office & Warehouse

Germany

NEKO Lighting GmbH
Kruppstrasse 47 (Office), 59227 Ahlen, Germany
Lange Reihe 170 (Warehouse), 59071 Hamm, Germany
T +49 2381 877 09 60
sales@nekolighting.de
https://nekolighting.com/de/

Office

France

NEKO Lighting
41, rue des Dames, 75017, Paris, France
T +33 1 44 50 20 30
sales@nekolighting.fr
https://nekolighting.com/fr/

Switzerland

NEKO Lighting AG
Rebstockstrasse 18
CH-6017, Ruswil
Switzerland
T +41 79 951 21 43
franz@nekolighting.com
https://nekolighting.com/

UK

NEKO Lighting
Unit 14E, Calderdale Business Park
Club Lane, Halifax, HX2 8DB, West Yorkshire, UK
T +0330 0571 888
hello@nekolightinguk.com
https://nekolighting.com/

UAE (MENA)

NEKO Lighting
GSHP01 Hamsa Building
Karama, Dubai, UAE
T +97 1502426911
david@nekolighting.com
https://nekolighting.com/

Saudi Arabia

NEKO Lighting
Riyadh 11461, Saudi Arabia
sales@nekolighting.com
https://nekolighting.com/

Singapore

NEKO Lighting
Singapore
sales@nekolighting.com
https://nekolighting.com/

Vietnam

NEKO Lighting
Ho Chi Minh City, 700000
Ha Noi 100000, Vietnam
T +84 908854489
tan.pham@nekolighting.com
https://nekolighting.com/

India

NEKO Lightings India Pvt Ltd
M no 901, A. P. Mordaree T. Haveli
Dist. Pune, 411025, India
T +91 7410700999
neko.india@nekolighting.in
https://nekolighting.com/

China (Bejing)

NEKO Lighting
Room A712, Xinhua International Plaza
No.89 Dayangfang Road, Chaoyang District, Beijing, 100020, China
T +86 173 2681 1100
jonson@nekolighting.com
https://nekolighting.com/

China (Shanghai)

NEKO Lighting
Room 309, 3rd Floor, Mong Kok Plaza
No.175 East Yan'an Road, Huangpu District, Shanghai, 200001, China
T +86 189 2602 8927
jonson@nekolighting.com
https://nekolighting.com/

